
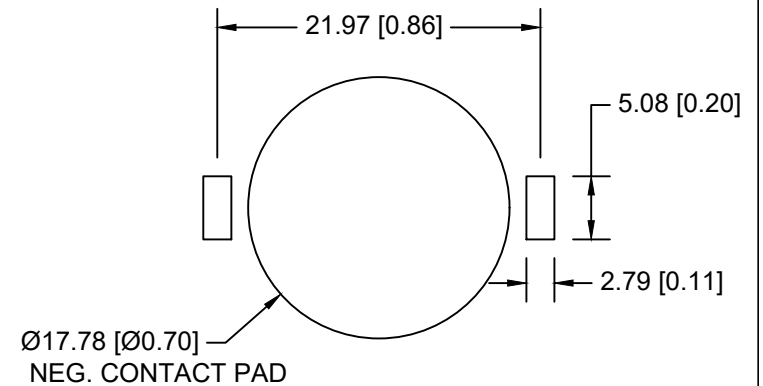



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
01/15/19	A	Updated Tolerances	T.B.	B.S.	
07/01/21	B	Dim. 11.24 was 11.18 Dim. 12.54 was 10.12	T.B.	B.S.	

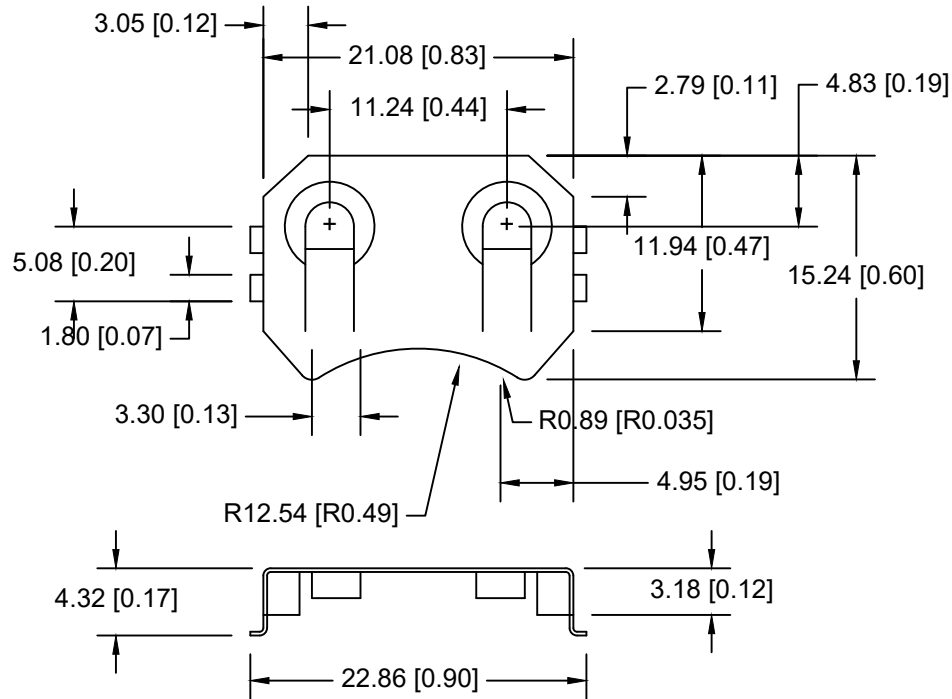

PCB LAYOUT

NOTES:

- MATERIAL:
0.25mm PHOSPHOR BRONZE, GOLD FLASH OVERALL, 1u-3u.
ROHS 2 COMPLIANT
TEMPERATURE RANGE: -40°C TO +270°C
* VIBRATION TEST: 10-50-10 HZ SWEEPED IN 60 SECONDS
X,Y,Z DIRECTION: 1 HOUR EACH DIRECTION
* RESULT: NO DISLODGE MENT OF THE CELL OR DAMAGE
NO DISCONTINUITY OVER 10 MICRO-SECONDS
* SHOCK TEST: HALF SINE WAVE ACCELERATION 150G.
6 MILLISECON DS
3 SHOCK PULSES EACH DIRECTION PER
AXIS, TOTAL OF 18 PULSES
* RESULT: NO EVIDENCE OF PHYSICAL DAMAGE

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
		decimal ±.5 (.020)	Approved By T.B.
Fractional ± .8 (.030)	Title CR2032 BATTERY RETAINER		
Angular ± 3°	Date 07/01/21	Drawing Number BK-912-G-TR	