


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [ mm <sup>2</sup> ]	DIMENSIONS in. [ mm ]		
		L ± .02 [ 0,51 ]	B DIA. ± .01 [ 0,25 ]	C ± .01 [ 0,25 ]
ES18B	#22-18 [ 0,5-1,0 ]	.62 [ 15,7 ]	.14 [ 3,6 ]	.032 [ 0,81 ]
ES14B	#16-14 [ 1,5-2,5 ]	.62 [ 15,7 ]	.16 [ 4,1 ]	.032 [ 0,81 ]
ES10B	#12-10 [ 4,0-6,0 ]	.63 [ 16,0 ]	.22 [ 5,6 ]	.040 [ 1,02 ]

NOTES:

- USED FOR:
  - A. SOLID OR STRANDED COPPER WIRE
  - B. 302°F [150°C] MAX TEMPERATURE RATING
  - C. 2000V MAX VOLTAGE
- INSTALLATION TOOLS:
  - A. UL LISTED AND CSA CERTIFIED: CT-100A, CT-200, CT-600A (CT-570CH), CT-1570, CT-2500 (CT-2570CH)
  - B. PANDUIT APPROVED: CT-160, CT-260
- WIRE STRIP LENGTH: 9/32" <sup>+1/32</sup><sub>-0</sub> [7,1mm <sup>+0,8</sup><sub>-0</sub>]
- MATERIAL: COPPER, TIN PLATED
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

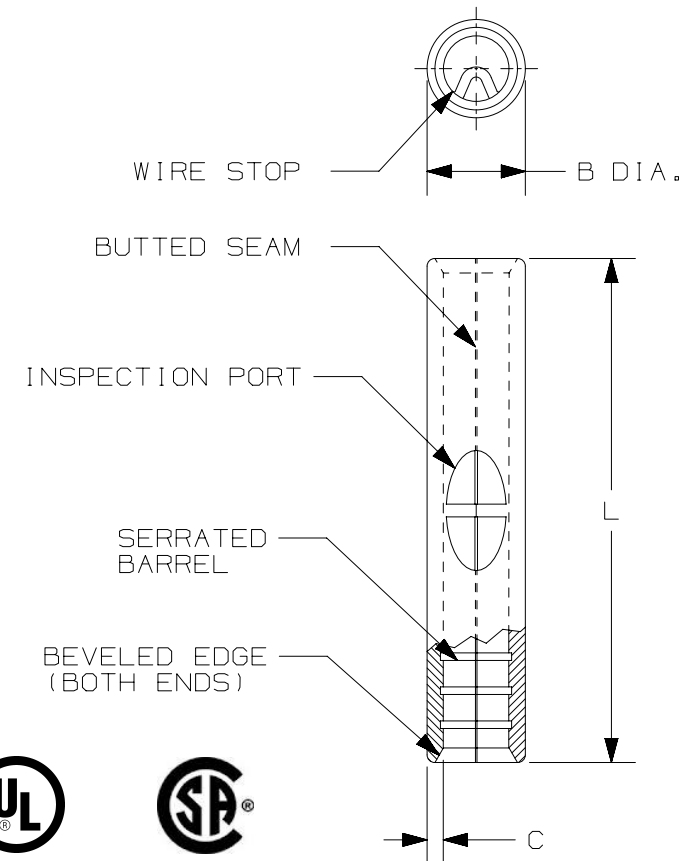

LISTED  
587H  
E52164



CERTIFIED  
LR31212

TITLE		<b>STRONGHOLD BUTT SPLICE NON-INSULATED, BUTTED SEAM #22-10 AWG</b>		
		CUSTOMER DRAWING		
ITEM REVISION NAME		00123SHB/00		
DATASET FILE NAME		00123SHB_DC/00A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		<b>PANDUIT</b> <sup>TM</sup>		
.x ± .1 [ 2.54 ]      .xxx ± .005 [ .13 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °				
DRAWING NUMBER:		SH41338		
DRAWN BY		DATE		SCALE
TMR		10.5.17		JHNU N.T.S
REV		DATE		DESCRIPTION
00		10.5.17		TMR JHNU RGB DRAWING RELEASED
ECN		00123SH		
SHEET 1 OF 1		A		

D10100DA/12