



| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 53.4              |
| B   | 24.05             |
| C   | 4                 |
| D   | 33.8              |
| E   | 47.8              |
| F   | 44.5              |
| G   | 57                |
| H   | M5                |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 8   | DOSENGEHÄUSE / SHELL                |

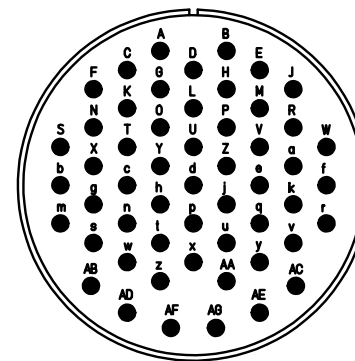

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

| Material Specification: |   |
|-------------------------|---|
| Shell Material:         | Aluminium alloy                               |
| Shell Plating:          | Olive drab chromate over cadmium (conductive) |
| Insulator Material:     | CR-Elastomere                                 |
| Contact Material:       | Copper alloy                                  |
| Contact Plating:        | Hard silver                                   |

|   |   |                                |
|---|---|--------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m   |   | drawing for<br><b>CUSTOMER</b> |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D - 71384 Weinstadt/Germany</small> | description<br><b>CA3102E32A10PXB-111</b><br>Box mounting receptacle (rear mount, threaded holes) |                                |
|   | Solder Cup / Pin / Layout: 32A10  |                                |
| © All rights reserved. Reproduction or issue to third in any form whatever is only permitted with written authorization of ITT Cannon   | page<br>1/1   | revision<br>1730 14. May 19    |