
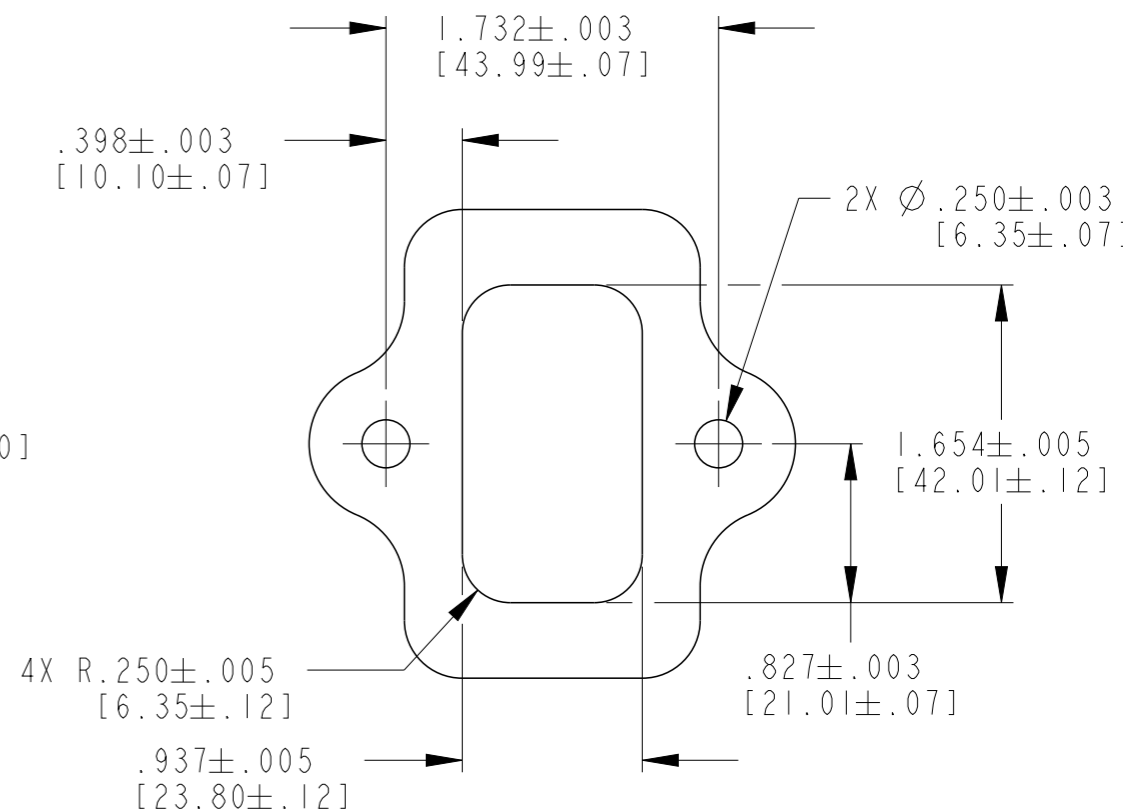
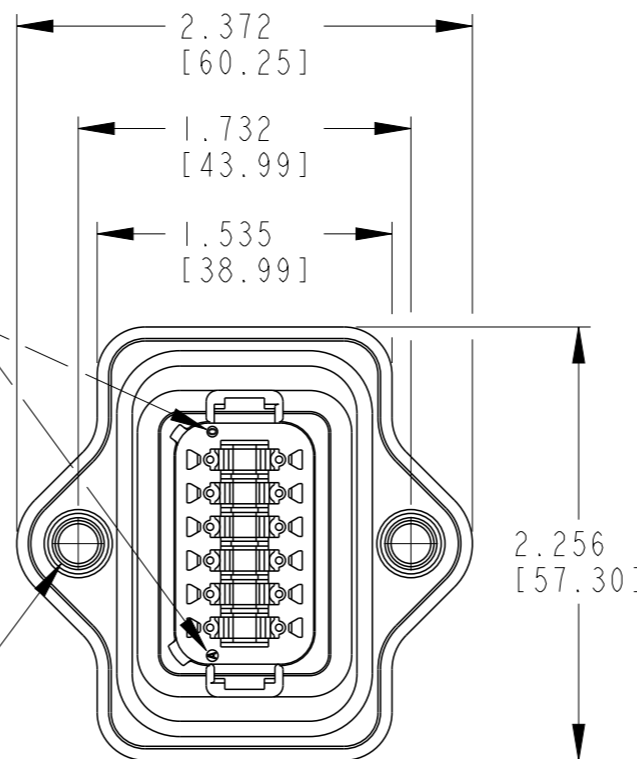
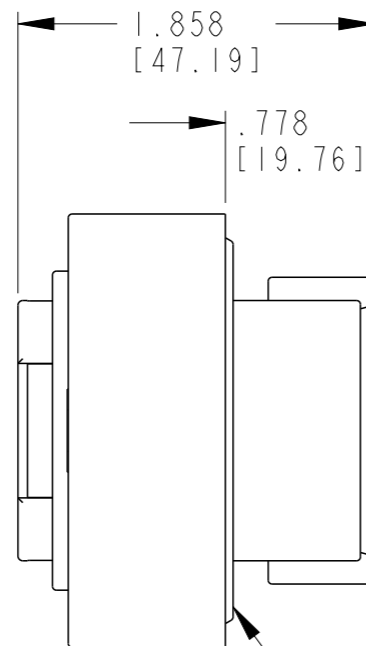


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER PCN E-17-012564	28AUG2017	JA	DM
	C	REVISED PER PCN E-19-014633	13FEB2019	AK	NS

-E- SYMBOL DESIGNATES REDUCED DIAMETER WIRE SEAL

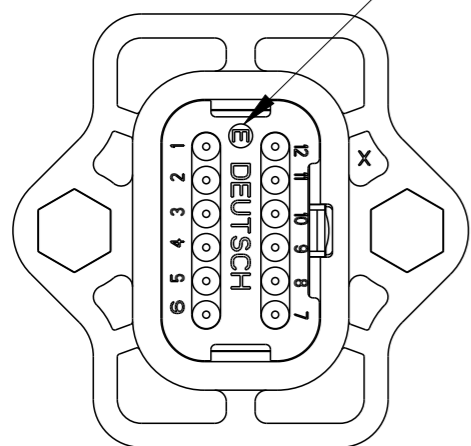

FLANGE SEAL IS INTENDED FOR NON-PRESSURIZED FLUID SPLASH ONLY

2X THREADED INSERT
 M6 X .500 DEEP
 RECOMMENDED TORQUE:
 62-88 IN-LB [7-10 N-m]

RECOMMENDED MOUNTING DETAIL

4 DATE CODE: MONTH IS REPRESENTED BY SEQUENTIAL ALPHA CHARACTERS. EX: A = JANUARY, YEAR IS REPRESENTED BY LAST NUMERICAL DIGIT. EX: 0 = 2010

3 MATERIAL: HOUSING, CAP, FLANGE: PA66 GF15 (GRAY)
 GROMMET, GASKET: VMQ (BURNT RED)
 INSERTS: STAINLESS STEEL

2. THIS RECEPTACLE MATES WITH DT06-12SA-XXXX PLUG.
 (XXXX = ALL MODIFICATIONS)
 CONSULT FACTORY FOR MODIFICATIONS.

1 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.

NOTES: UNLESS OTHERWISE SPECIFIED

TE INTERNAL PN	DEUTSCH PN
DT04-12PA-LE06	DT04-12PA-LE06

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE [mm ²] REF ONLY
16	.053 [1.35]	.120 [3.05]	14-20 AWG [2.5-0.5]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. WOODRUFF 14MAR1994				
DIMENSIONS: in [mm]		CHK B. BYFORD 06JUL2012				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. BEARD 05JUL2012	NAME 3 WAY RECEPTACLE FLANGE MOUNT THIN WALL WIRE SEAL DT SERIES			
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ± ANGLES ±0° 30' 0"		PRODUCT SPEC 108-151009	SIZE A3	CAGE CODE 4AFU8	DRAWING NO DT04-12PA-LE06	RESTRICTED TO
MATERIAL 3		FINISH	APPLICATION SPEC 114-151009	WEIGHT 73g	SCALE 1:1	
CUSTOMER DRAWING			SHEET 1 OF 1		REV C	