

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0905841310](#)  
**Status:** **Active**  
**Overview:** [Picoflex Ribbon-Cable Connectors](#)  
**Description:** 1.27mm Pitch Picoflex PF-50 IDT Receptacle, Low Profile, Board-in, 10 Circuits

**Documents:**

<a href="#">3D Model (PDF)</a>	<a href="#">Product Specification PS-99020-0011-001 (PDF)</a>
<a href="#">3D Model</a>	<a href="#">Packaging Specification PK-90584-001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**

UL E29179

**General**

Product Family	Ribbon Cable / Wire Trap Connectors
Series	90584
Comments	Low Profile
Component Type	One Piece
Glow-Wire Capable	No
Overview	<a href="#">Picoflex Ribbon-Cable Connectors</a>
Product Name	Board-in, Picoflex
UPC	800753756243


**Physical**

Circuits (Loaded)	10
Color - Resin	Natural
Durability (mating cycles max)	30
Entry Angle	90° Angle
Flammability	94V-0
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	0.680/g
Number of Rows	2
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	1.27mm
Plating min - Mating	2.032µm
Plating min - Termination	2.032µm
Polarized to Mating Part	N/A
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole - Kinked Pin
Wire Insulation Diameter	1.00mm max.
Wire Size AWG	26, 28
Wire/Cable Type	Ribbon Cable

**Electrical**

Current - Maximum per Contact	1.2A
Voltage - Maximum	250V

**Solder Process Data**

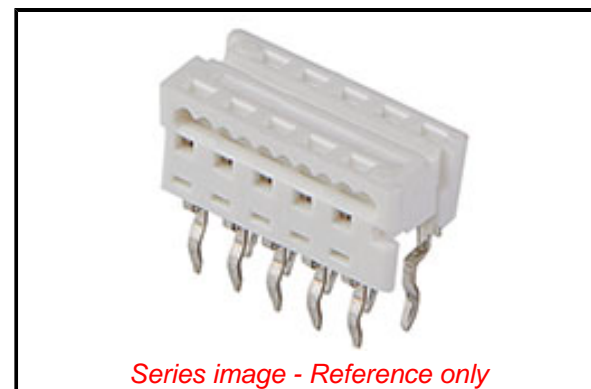

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

90584 Series

**Mates With**

N/A

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
PremiumGrade Hand Crimp Tool for Picoflex PF-50 IDT Receptacle, 4-26 Circuits, 26 or 28 AWG Flat Cable, 1.00mm max. thickness	<a href="#">690081090</a>
Arbor Press Fixture	<a href="#">690201902</a>
Arbor Press Fixture	<a href="#">690201908</a>

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	230

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification	PK-90584-001-001
Product Specification	PS-99020-0011-001
Sales Drawing	SDA-90584-001

This document was generated on 09/02/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**