

www.lemo.com

# FFA.00.250.CTAC29Z

## **SUMMARY**

# Wires

Coax 1



Image is for illustrative purpose only

Series 00

Termination type Male solder

IP rating 50

AWG wire size 0.00 - 0.00

Cable Ø 2.80 - 3.10 mm

**Status** active

Alternative part FFA.00.250.CTAC31Z

Matching parts ERA.00.250.CTL

#### **Download**

Request a quote

Catalog

## **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model FFA\*: Straight plug with cable collet and nut for fitting a bend relief

Keying Circular, male

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Variant Z: Nut for fitting a bend relief

Weight 3.73 g

#### **Performance**

Configuration 00.250 : 1 Coax (50 Ohm)

Insulator T: PTFE Rated Current 4 Amps

### **Specifications**

Contact Type: Coaxial 50 Ohm (Solder)

Contact Dia.: 0.7 mm (0.028in) Bucket Dia.: 0.6 mm (0.024in) Test voltage: 2.1 kV (rms)

R (max): 6.1 mOhm

Vtest: 2100 V (AC), 3000 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Impedance: 50 Ohm VSWR: 1.09 + 0.11 \* f/GHz Cable type: RG 316 /U


#### **Others**

Endurance (Shell): 5000 mating cycles

F ret (min): 100 N

Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

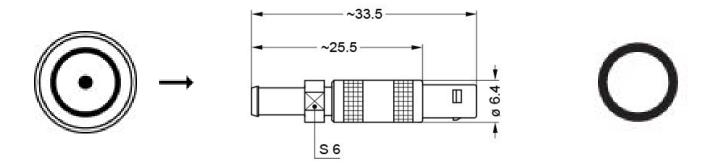

### **Dimensions**

|     | А    | L    | М    |
|-----|------|------|------|
| mm. | 6.4  | 33.5 | 25.5 |
| in. | 0,25 | 1,32 | 1,00 |

# **RECOMMENDED BY LEMO**

#### **Tools**

Spanner wrench: DCD.00.003.PA060

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

### **Cables**

| 17420              | PVC  | Black |  |
|--------------------|------|-------|--|
| 31600              | PTFE | Brown |  |
| CCX.50.RG1.74AU28N | PVC  | Black |  |
| CCX.50.RG1.74AU28N | PVC  | Black |  |
| CCX.50.RG3.16U28M  | PTFE | Brown |  |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.