


	REVISIONS								
	REV	ECO	DESCRIPTION	DATE	BY	APPR			
01 -		-	RELEASED NUMBER	2018-02-28	Nick	TOMMY			



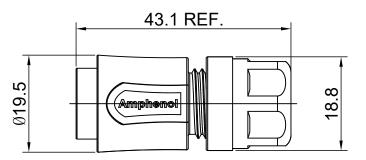



DIMENSION ØA	CABLE OD RANGE		
5.5 MM	1.5~5.0MM		
6.8 MM	2.5~6.5MM		

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:

O-RING: SILICONE RUBBER.

BACK SHELL: THERMOPLASTIC, UL94 V-0. CLAMP NUT: THERMOPLASTIC, UL94 V-0. CLAMP RING: THERMOPLASTIC, UL94 V-0.

CABLE SEAL: EPDM. 2. Rohs Compliant.

3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

QUANTITY	PART N	NUMBER	DESCRIPTION		ITEM		
MATERIALS LIST							
UNLESS OTHERWISE SPECIFI  1) All dimensions are in metric(mi 2) Tolerances are as follows:  1 PL DEC +0.30		SIGNATUR	ES DATE	= Ambhehol			
		DRAWN: Nick	2018-02-28				
2 PL DEC ±0.30 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED: Tod	2018-02-28				
3) Note reference =  \( \times \) MATERIAL SPECIFICATIONS:  PROCESS SPECIFICATIONS:  NEXT ASSY:		ENGINEER:		44724 Morley Drive Clinton Township, MI 48036			
		APPROVAL: Tommy	2018-02-28				
		CUSTOMER:		ECO-MATE,CORD GRIP,			
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLED. ALL		RTS ,SIZE 8.			
				RTSOL-8CG	A1		
				SCALE: NONE SHEET 1 C	of <b>1</b>		