





ISSUE NUMBER	
ORIGINAL	

(1)

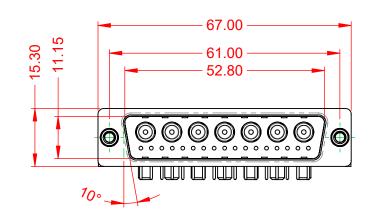




.XX ±0.13 .XXX ±0.05




MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT	Ð
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.	
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.	
WITHSTANDING VOLTAGE:	1000V AC rms	



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC ARE THE PROPERTY OF EDAC INC., SHALL NOT BE REPRODUCED, OR CO OR USED AS THE BASIS FOR THE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-24W7240-7N2		ISSUE
			PART NUMBER: 629-24W	7240-7N2	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

