

NHD-12864AZ-FSW-GBW-VZ

Graphic Liquid Crystal Display Module

| | |
|--------|---------------------------------------|
| NHD- | Newhaven Display |
| 12864- | 128 x 64 Pixels |
| AZ- | Model |
| F- | Transflective |
| SW- | Side White LED backlight |
| G- | STN- Gray |
| B- | 6:00 Optimal View |
| W- | Wide Temperature |
| VZ- | With Built-in Negative Voltage Supply |
| | RoHS Compliant-8.8 |

Newhaven Display International, Inc.

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com

nhsales@newhavendisplay.com



Document Revision History

| Revision | Date | Description | Changed by |
|----------|----------|---|------------|
| 0 | 11/15/08 | Initial Release | - |
| 1 | 4/2/10 | User guide reformat | BE |
| 2 | 5/6/10 | Block diagram/initialization updated | BE |
| 3 | 1/21/11 | Update Electrical Characteristics | JT |
| 4 | 12/17/12 | Controller information updated | AK |
| 5 | 8/24/17 | Mechanical Drawing, Electrical & Optical Char. Updated | SB |
| 6 | 3/7/19 | Mechanical Drawing & Electrical Characteristics Updated | SB |

Functions and Features

- 128x64 pixels
- Built-in AiP31108 (or equivalent) controller
- +5.0V power supply
- 1/64 duty, 1/9 bias
- RoHS Compliant

| SYMBOL | REVISION | DATE |
|--------|----------|------|
| | | |
| | | |

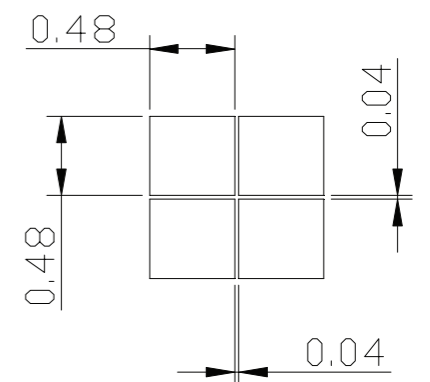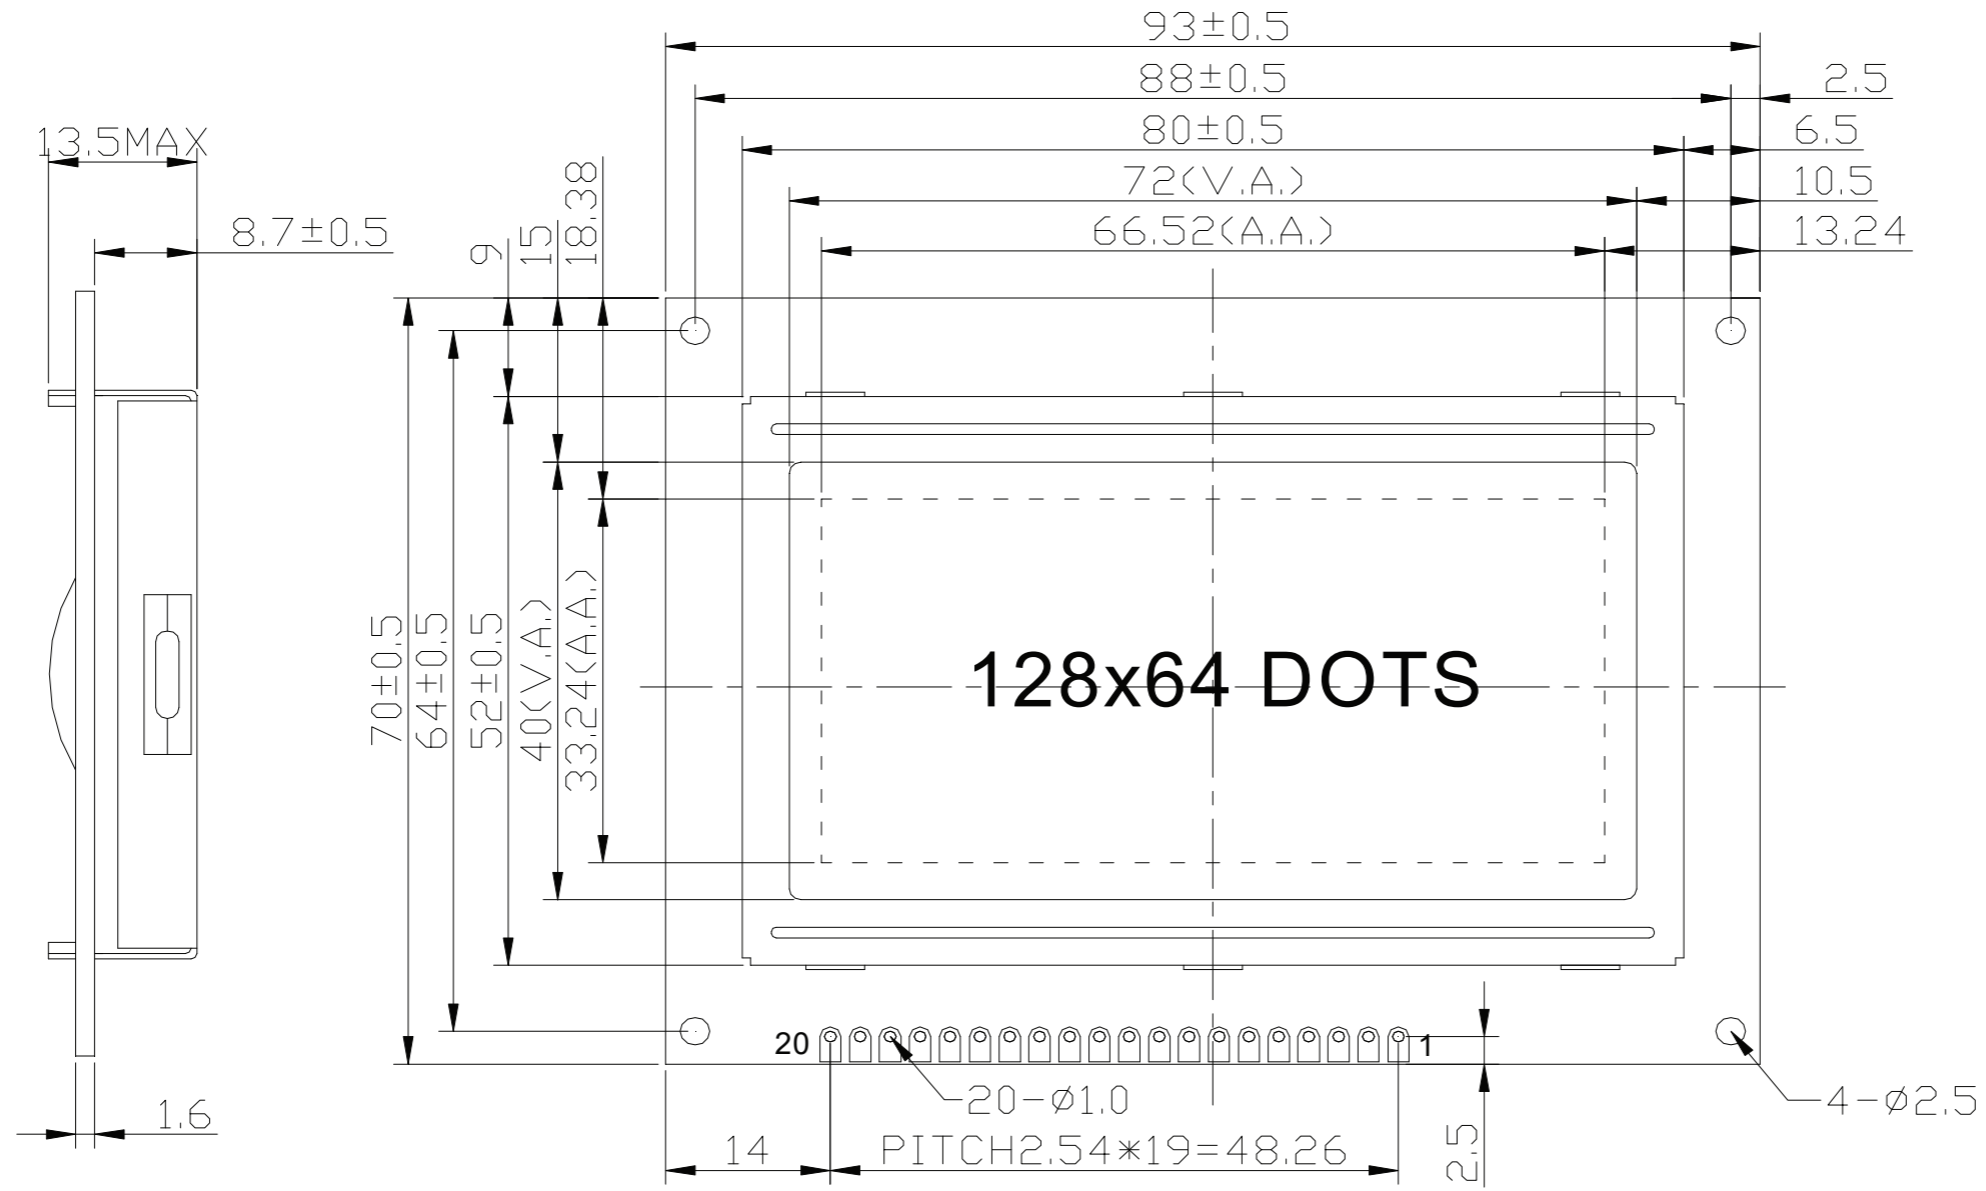

PIN ASSIGNMENT

| | |
|------|---------|
| 1 | VSS |
| 2 | VDD |
| 3 | V0 |
| 4 | RS |
| 5 | R/W |
| 6 | E |
| 7~14 | DB0~DB7 |
| 15 | CS1 |
| 16 | CS2 |
| 17 | RST |
| 18 | VEE |
| 19 | LED+ |
| 20 | LED- |

Notes:

1. Driver: 1/64 Duty, 1/9
2. Display Mode: STN Positive / Gray / Transflective
3. Optimal View: 6:00
4. Voltage: 5.0V VDD, 8.7V VLCD
5. Backlight: White LED
6. Driver IC: AiP31108

STANDARD TOLERANCE: (UNLESS OTHERWISE SPECIFIED)
LINEAR: ±0.3mm

NEWHAVEN DISPLAY INTERNATIONAL

DRAWING/PART NUMBER: NHD-12864AZ-FSW-GBW-VZ

REVISION: 1.0
SIZE: A3

UNLESS OTHERWISE SPECIFIED:
- DIMENSIONS ARE IN MILLIMETERS
- THIRD ANGLE PROJECTION

DRAWN BY: S. Baxi
APPROVED BY: S. Baxi
DRAWN DATE: 03/07/19
APPROVED DATE: 03/07/19

SCALE: NS

DO NOT SCALE DRAWING SHEET 1 OF 1


THIS DRAWING IS SOLELY THE PROPERTY OF NEWHAVEN DISPLAY INTERNATIONAL, INC. THE INFORMATION IT CONTAINS IS NOT TO BE DISCLOSED, REPRODUCED OR COPIED IN WHOLE OR PART WITHOUT WRITTEN APPROVAL FROM NEWHAVEN DISPLAY.

Pin Description and Wiring Diagram

| Pin No. | Symbol | External Connection | Function Description |
|---------|-----------------|---------------------|---|
| 1 | V _{SS} | Power Supply | Ground |
| 2 | V _{DD} | Power Supply | Supply Voltage for Logic (+5.0V) |
| 3 | V ₀ | Adj. Power Supply | Supply Voltage for Contrast (approx. -3.7V) |
| 4 | RS | MPU | Register Select: 1=Data, 0=Instruction |
| 5 | R/W | MPU | Read/Write select signal, R/W=1: Read R/W: =0: Write |
| 6 | E | MPU | Operation Enable signal. Falling edge triggered. |
| 7-14 | DB0-DB7 | MPU | This is an 8-bit Bi-directional data bus |
| 15 | CS1B | MPU | Chip Selection: CS1=H, CS2=L → select IC1 (left side) CS1=L, CS2=H → select IC2 (right side) |
| 16 | CS2B | MPU | |
| 17 | /RES | MPU | Active LOW Reset signal |
| 18 | VEE | Power Supply | Negative voltage output (-10V) |
| 19 | LED+ | Power Supply | Backlight Anode (+5V Via On Board Resistor) |
| 20 | LED- | Power Supply | Backlight Cathode |

Recommended LCD connector: 2.54mm pitch pins

Backlight connector: ----

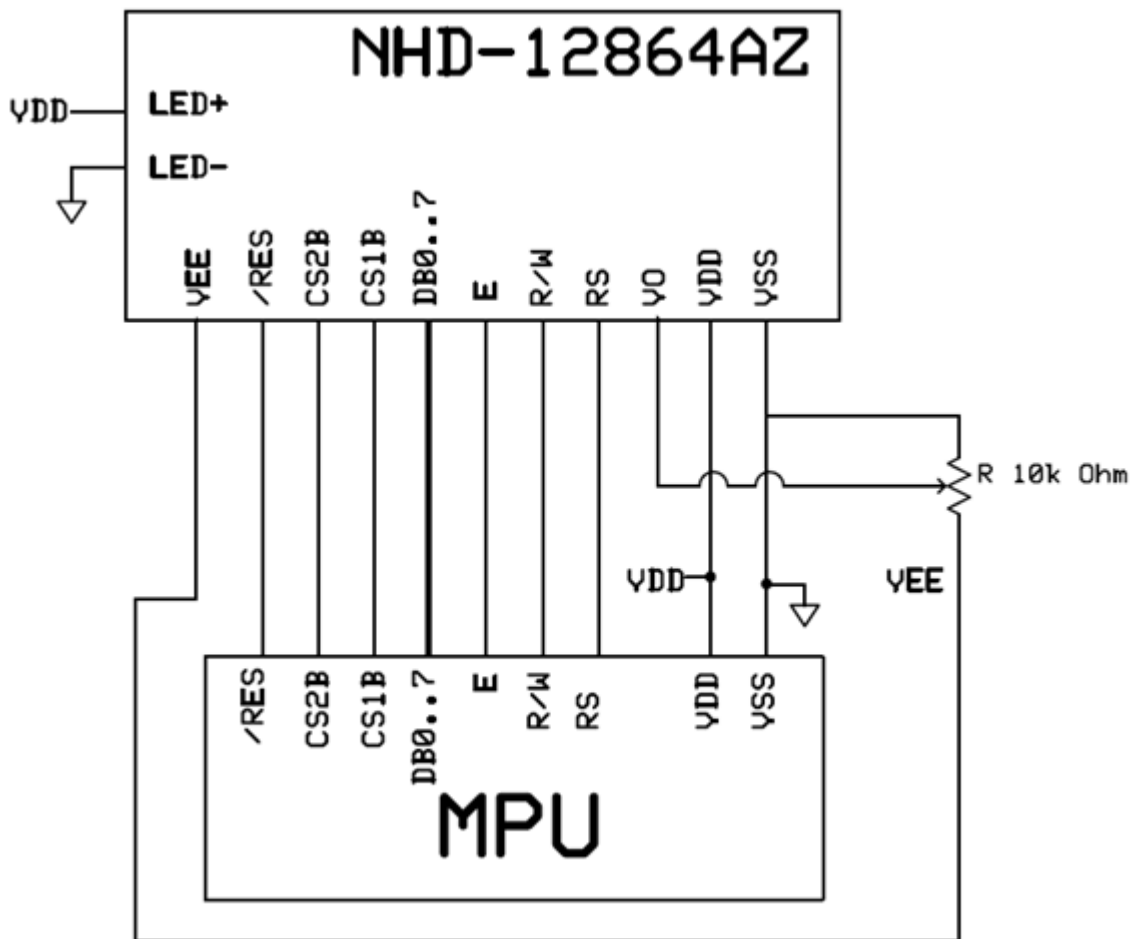

Electrical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------|------------------|-------------------------|-----------------------|------|-----------------------|------|
| Operating Temperature Range | T _{OP} | Absolute Max | -20 | - | +70 | °C |
| Storage Temperature Range | T _{ST} | Absolute Max | -30 | - | +80 | °C |
| Supply Voltage | V _{DD} | - | 4.8 | 5.0 | 5.2 | V |
| Supply Current | I _{DD} | V _{DD} = 5.0V | 1.5 | 3.0 | 4.0 | mA |
| Supply for LCD (contrast) | V _{LCD} | T _{OP} = 25°C | 8.3 | 8.7 | 9.2 | V |
| "H" Level input | V _{IH} | - | 0.7 * V _{DD} | - | V _{DD} | V |
| "L" Level input | V _{IL} | - | V _{SS} | - | 0.3 * V _{DD} | V |
| "H" Level output | V _{OH} | - | 2.4 | - | V _{DD} | V |
| "L" Level output | V _{OL} | - | V _{SS} | - | 0.4 | V |
| Backlight Supply Voltage | V _{LED} | - | 4.8 | 5.0 | 5.2 | V |
| Backlight Supply Current | I _{LED} | V _{LED} = 5.0V | 20 | 30 | 40 | mA |

Optical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------|------------------------|------|------|------|------|
| Optimal Viewing Angles | Top | CR ≥ 2 | - | 40 | - | ° |
| | Bottom | | - | 60 | - | ° |
| | Left | | - | 60 | - | ° |
| | Right | | - | 60 | - | ° |
| Contrast Ratio | CR | - | 2 | 5 | - | - |
| Response Time | Rise | T _{OP} = 25°C | - | 150 | 250 | ms |
| | Fall | | - | 200 | 300 | ms |

Controller Information


Built-in AiP31108 controller.

Please download specification at <https://www.newhavendisplay.com/appnotes/datasheets/LCDs/AiP31108.pdf>

Table of Commands

| Instruction | RS | R/W | DB7 | DB6 | DB5 | DB4 | DB3 | DB2 | DB1 | DB0 | Function | |
|--------------------------------|----|-----|------------|-----|---------------------------|-------|-----|------------|-----|-----|---|---|
| Display on/off | L | L | L | L | H | H | H | H | H | L/H | Controls the display on or off. Internal status and display RAM data is not affected. L:OFF, H:ON | |
| Set address (Y address) | L | L | L | H | Y address (0-63) | | | | | | Sets the Y address in the Y address counter. | |
| Set page (X address) | L | L | H | L | H | H | H | Page (0-7) | | | Sets the X address at the X address register. | |
| Display Start line (Z address) | L | L | H | H | Display start line (0-63) | | | | | | Indicates the display data RAM displayed at the top of the screen. | |
| Status read | L | H | Busy | L | On/Off | Reset | L | L | L | L | Read status. BUSY L: Ready H: In operation ON/OFF L: Display ON H: Display OFF RESET L: Normal H: Reset | |
| Write display data | H | L | Write data | | | | | | | | | Writes data (DB0: 7) into display data RAM. After writing instruction, Y address is increased by 1 automatically. |
| Read display data | H | H | Read data | | | | | | | | | Reads data (DB0: 7) from display data RAM to the data bus. |

Timing Characteristics

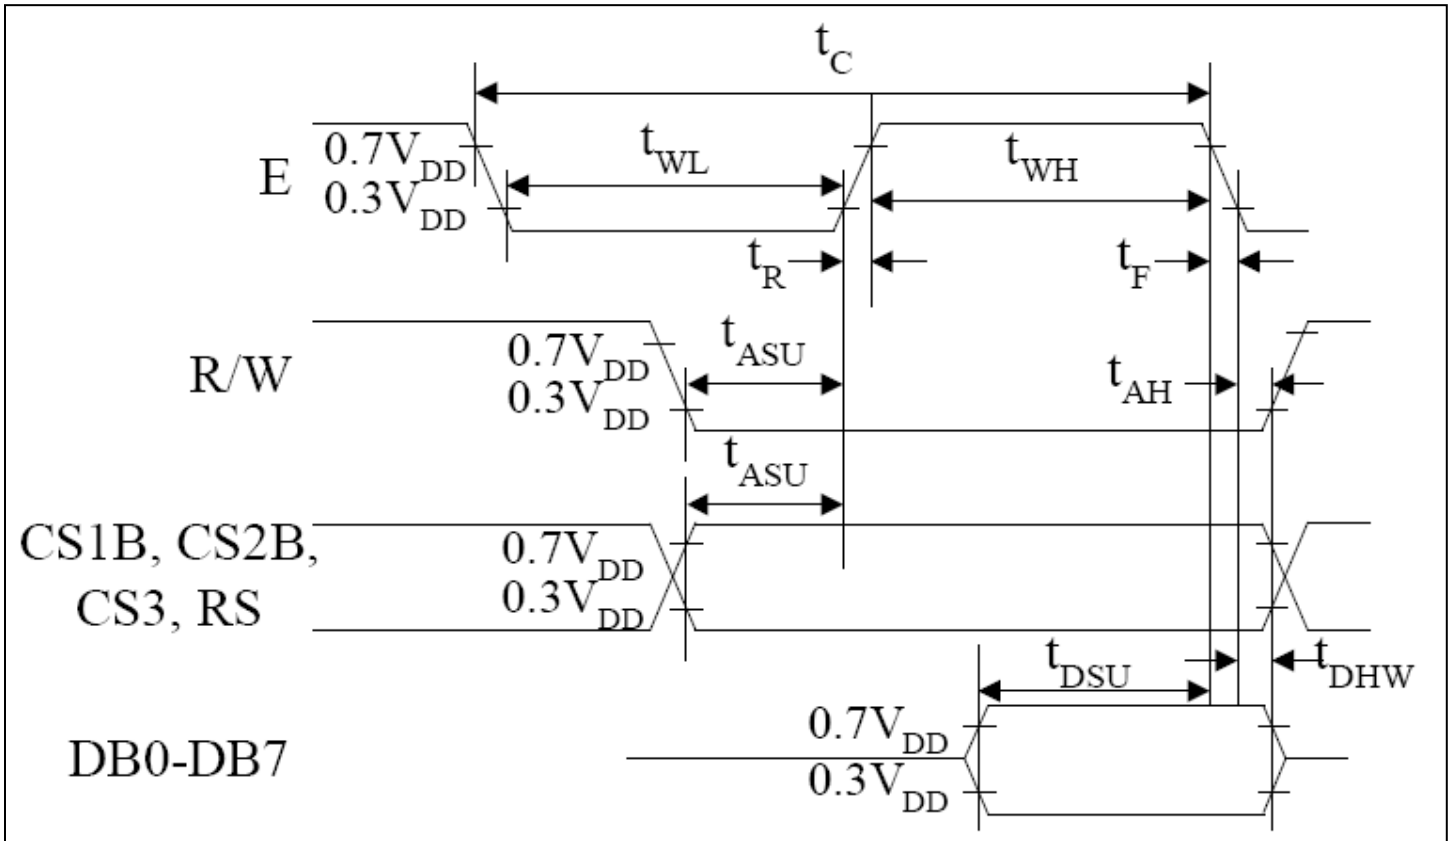

| Characteristic | Symbol | Min | Type | Max | Unit |
|------------------------|-----------|------|------|-----|------|
| E cycle | t_c | 1000 | - | - | ns |
| E high level width | t_{WH} | 450 | - | - | |
| E low level width | t_{WL} | 450 | - | - | |
| E rise time | t_R | - | - | 25 | |
| E fall time | t_F | - | - | 25 | |
| Address set-up time | t_{ASU} | 140 | - | - | |
| Address hold time | t_{AH} | 10 | - | - | |
| Data set-up time | t_{DSU} | 200 | - | - | |
| Data delay time | t_D | - | - | 320 | |
| Data hold time (write) | t_{DHW} | 10 | - | - | |
| Data hold time (read) | t_{DHR} | 20 | - | - | |

Example Initialization Program

```
'-----  
'DB0-DB7  7-14          P1  
'CS2      16           P3.6  
'CS1      15           P3.1  
'RST      17           P3.2  
'R/W      5            P3.7  
'D/I      4            P3.0  
'E        6            P3.4  
'-----  
Sub Init  
  Reset P3.2  
  Set P3.2  
  Reset P3.4  
  Reset P3.0  
  Reset P3.7  
  Reset P3.6  
  Reset P3.1  
  A = &H3F  
  Call Comleft           'display on  
  Call Comright        'display on  
End Sub  
'-----  
Sub Comleft  
  P1 = A  
  Set P3.6  
  Reset P3.0  
  Set P3.4  
  Reset P3.4  
  Reset P3.6  
End Sub  
  
Sub Comright  
  P1 = A  
  Set P3.1  
  Reset P3.0  
  Set P3.4  
  Reset P3.4  
  Reset P3.1  
End Sub  
  
Sub Writeleft  
  P1 = A  
  Set P3.6  
  Set P3.0  
  Set P3.4  
  Reset P3.4  
  Reset P3.6  
End Sub  
  
Sub Writeright  
  P1 = A  
  Set P3.1  
  Set P3.0  
  Set P3.4  
  Reset P3.4  
  Reset P3.1  
End Sub
```


Quality Information

| Test Item | Content of Test | Test Condition | Note |
|---------------------------------------|---|---|------|
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | +80°C , 48hrs | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -30°C , 48hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time. | +70°C , 48hrs | 2 |
| Low Temperature Operation | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time. | -20°C , 48hrs | 1,2 |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +40°C , 90% RH , 48hrs | 1,2 |
| Thermal Shock resistance | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress. | 0°C,30min -> 25°C,5min -> 50°C,30min = 1 cycle 10 cycles | |
| Vibration test | Endurance test applying vibration to simulate transportation and use. | 10-55Hz , 15mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes | 3 |
| Static electricity test | Endurance test applying electric static discharge. | VS=800V, RS=1.5kΩ, CS=100pF One time | |

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information and Terms & Conditions

http://www.newhavendisplay.com/index.php?main_page=terms