

т	۵	п –	m	0





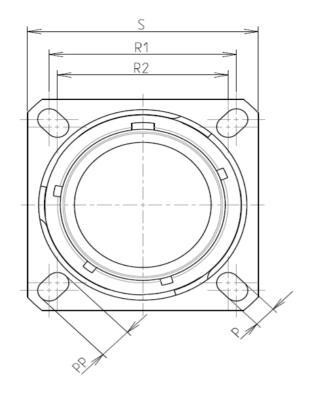

Keying Shown as example

CHARACTERISTICS

ω

 \sim


-Mass

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Black Zinc Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65°C to +175°C
-Salt Spray	: 500 hours

: 13.92 g ± 10%

Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		



BASIC SERIES: 8D	0 -	11 Z	22	S	E			SCALE	1	$\square \square$	General linear Tolerances:
 SHELL TYPE : Square Flange Receptacle								NA		$\square \Psi$	±
CONTACT TYPE : Standard Crimp Contact							ORIENTATION :		ΙΔIJ	\ \ /\\/\//	.SOURIAU.C
SHELL SIZE : 11						CONTACT TYP	E : SOCKET(500 Mating				
PLATING : Z = Black Zinc Nickel						С	CONTACT LAYOUT : 11-2				SOURIAU
								A3			8D011Z
H	G			F		E		D		С	
							V				

					I			
C		Φ		A				
					4			
LAY	YOUT SHOWN AS EXA	MPLE			3			
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)								
PN: 8D011Z22SE								
rst Release								
Latest modificatio	in - by			MOD N	•			
Date:			CUSTOMER DR	AWING				
Aluminium Receptacle 8D series								
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PRO 859	JJECT	1			
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission								
SOURIAU DRG N° SHEET 8D011Z22SE-C 1/2								
		1 N H - (1 1//				
С		<u>B</u>		A				

,							
4	(Contact Layout 22*				SQUARE FLANGE REC REAR MO	Panel Cur
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905					ØT_
ى	C D	-1.905 -1.905 -1.905 1.905]				Dim ØA ØAA R1 ØT
	-					due t the Specif	U shall not be liable for o a use of the Products ications issued by either professional recommend
N							PN: 8D01
					A ISS Designed		dification - by Date:
_					SCAL		General linear Tolerances:
				_	FORMA A3	AT	WW.SOURIAU SOURIA 8D011
·	Н	G	F	E	D		C

Т

ш

т

G

0

