


RoHS COMPLIANT

REV	DATE
B	05/20/'21
C	06/18/'21

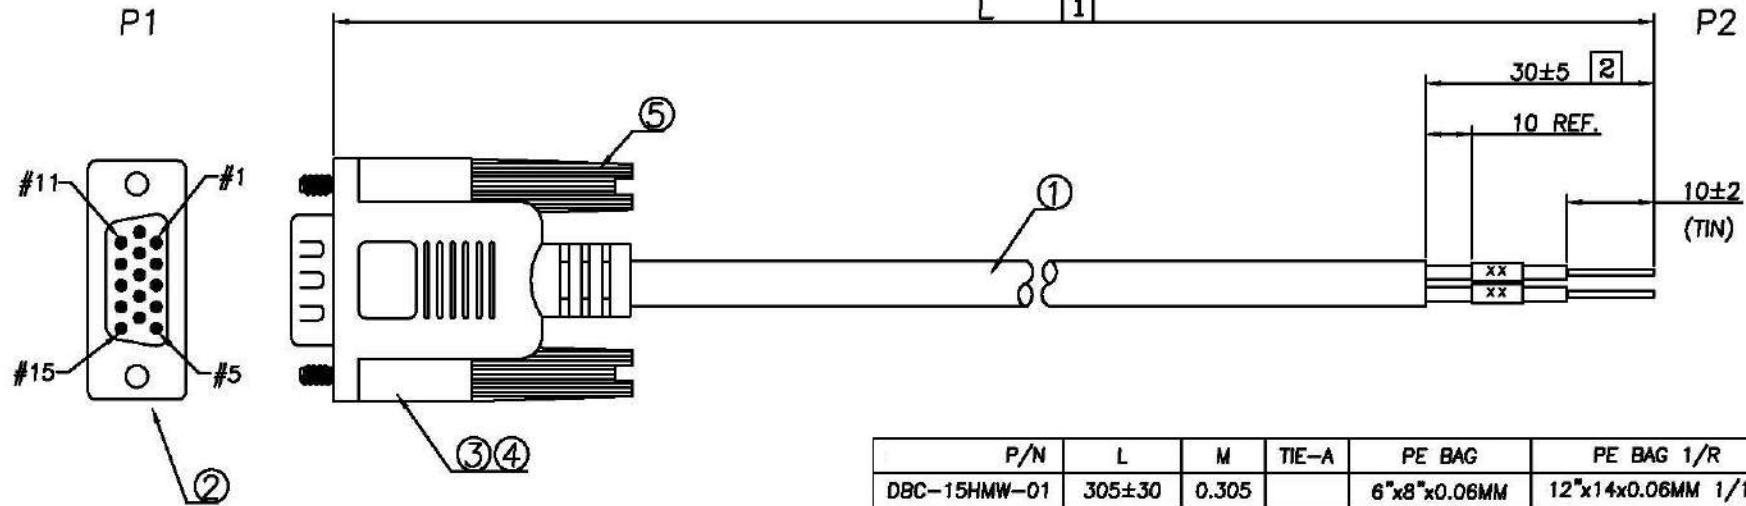

P/N	L	M	TIE-A	PE BAG	PE BAG 1/R	Q'TY
DBC-15HMW-01	305±30	0.305		6"x8"x0.06MM	12"x14"x0.06MM 1/10	A/R
DBC-15HMW-05	1525±50	1.525	100x2	6"x8"x0.06MM	14"x16"x0.06MM 1/10	A/R
DBC-15HMW-10	3050±50	3.05	120x2	7"x10"x0.06MM	14"x16"x0.06MM 1/10	A/R
DBC-15HMW-25	7625±50	7.625		8"x10"x0.06MM	16"x18"x0.06MM 1/5	A/R

PIN ASSIGNMENT

P1	P2	P1	P2
1 — BLACK — P1	11 — PINK — P11		
2 — BROWN — P2	12 — LIGHT GREEN — P12		
3 — RED — P3	13 — BLACK/WHITE — P13		
4 — ORANGE — P4	14 — BROWN/WHITE — P14		
5 — YELLOW — P5	15 — RED/WHITE — P15		
6 — GREEN — P6	S — DRAIN CUT		
7 — BLUE — P7			
8 — PURPLE — P8			
9 — GRAY — P9			
10 — WHITE — P10			

* LABEL: Prop 65 WARNING, 40*15MM	1	PCS	
* PE BAG: L"xW"x0.06MM	A/R	PCS	
* HT-TUBE OD:1.5MM, WHITE 15MM	15	PCS	
* TIE-A BLACK	XX*2	MM	
* CARTON: 46x30x25CM	A/R	PCS	
* PE BAG: 30"x28"x0.08MM	A/R	PCS	
* PE BAG: L"xW"x0.06MM	1	PCS	
5 SCREW #4-40/BLACK	2	PCS	
4 PVC BLACK (UL94-V0)	16	G	
3 PVC-IN	4	G	
2 D-SUB HD 15PIN MALE, BLACK	1	PCS	
1 UL2464 28AWG 15C+AD BLACK OD:6.0	L	M	
NO.	DESCRIPTION	QTY	UNIT



MODEL NAME:

HD15P SINGLE CONNECTOR MOLDING CABLE

MARK EXPLAIN:

- ▲:Revision Change
- 1:Important Dimension
- Ⓢ:Note

TOLERANCE:

0.000:
0.00 : ±0.50
0.0 : ±0.50
0. : ±0.50
ANGLE: ±3.0'
UNIT: mm

COMPUABLEPLUS
PROVIDING CONNECTIVITY SOLUTIONS