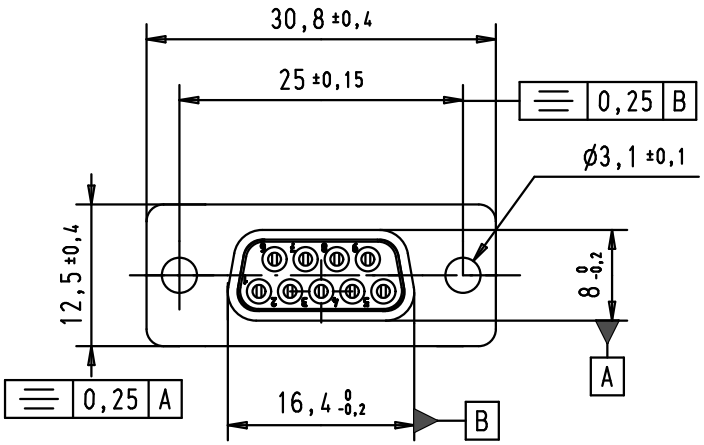

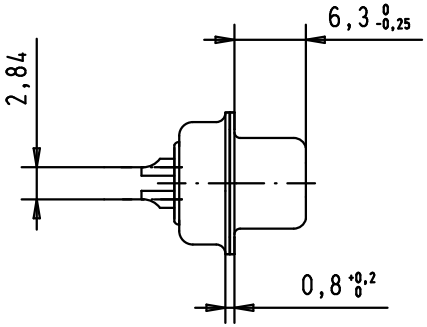

Solder bucket for AWG 20

SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	47pf±20%
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	>1GΩ

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	–
10	–
50	–
100	–
500	30dB
1000	35dB

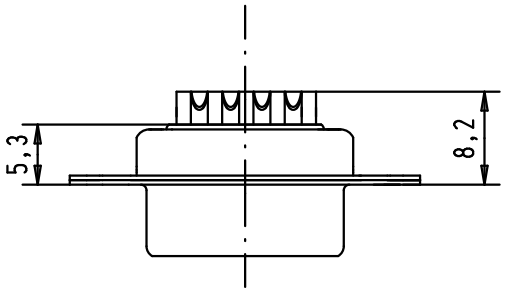

				Dat.	Name
			Detail.	8-JUL-02	CV
			Insp.	12/01/12	JB
36283	12/01/12	SD	Stand.		
32802	11/07/05	JMDR			
31058	8-JUL-02	CV			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-Sub, female, straight
9 Poles, with turned solder bucket, fixing hole

Ma?Mstab/ Scale 1.5:1

TB 09641117210

Sub.

Blatt/ Page 1/1