


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM NOS. FOR REF. ONLY
4. RATING: 5A @120 (Resistive Load)
2A @250VAC
5. CONTACT MATERIAL:
Copper ALLOY w/Silver plate
6. ELECTRICAL LIFE: 30,000 ACTUATIONS @Full Load
7. INSULATION RESISTANCE: 1000 Mega Ohms min.
8. DIELECTRIC STRENGTH: 1000V RMS @SEA LEVEL.
9. OPERATING TEMPERATURE: -30°C TO 85°C
10. TRAVEL: 2.16mm

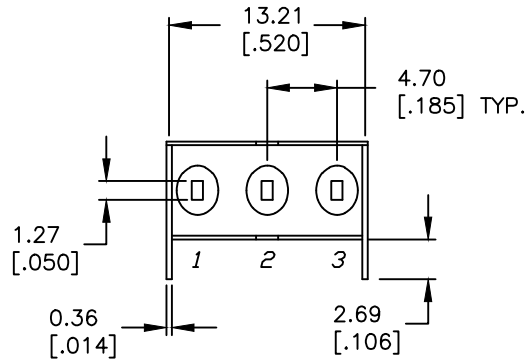

| SWITCH FUNCTION | | |
|-----------------|--------|--------|
| PDS. 1 | PDS. 2 | PDS. 3 |
| | | |
| ON | NONE | ON |
| 2-1 | OPEN | 2-3 |

| | | | | |
|------|---------|--------------------------|----------|------|
| C | 23137 | drawing update | 12/11/17 | MW |
| B | 12386 | REVISED DESCRIPTION/ACT. | 8/26/02 | CJB |
| A | 11849 | RELEASED FOR PRODUCTION | 12/10/01 | RSB |
| REV. | ECN No. | DESCRIPTION | DATE | CHKD |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



| | | | | | | | | | |
|-------|------|----|-----|-----|----------------|----------|-----|---------|---|
| TITLE | | | | | 500SSP1S4M6QEA | | | | |
| SCALE | DATE | DR | DWG | REV | 2:1 | 12/07/01 | RSB | T511024 | C |