
<u> </u>	دی ا	 111	







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	-65°C to +175°C			
	-Salt Spray	: 500 hours			

: 10.45 g ± 10%

8D 0

09


W


98

В

В

	r dimension
Dim	Nominal
Р	3.25±0.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M12x1-6g

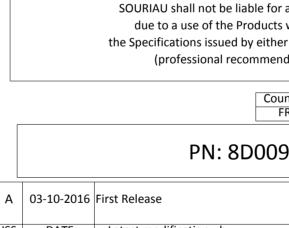

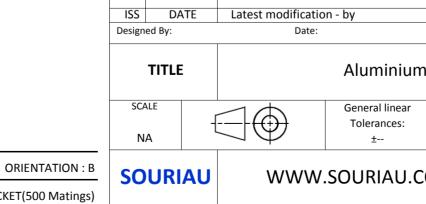

С

SHELL SIZE : 09			CONTACT TYPE : SOCKET(500 Matings)				
PLATING : W =	Olive drab Cadr	mium			CON	TACT LAYOUT : 09-9	8 FORMAT
							- A3
Н		G	F		E		D

	ω			A			
						4	
YOUT SHOWN AS EX.	AMPLE					3	
not be liable for any non-conformity or damage of the Products which does not comply with issued by either of the Parties or by a third party onal recommendation, technical notice.)							
Country FR	Jurisd	iction & Not Lis	Control List sted			2	
N: 8D009W98BB							
on - by		CUSTO	MER DRAWIN		/OD N°		
Aluminium	Receptacl						
General linear Tolerances: ±	NPRDS / PROJECT 859			1			
.SOURIAU.COM it must not be reproduced or communicated without permission							
SOURIAU					SHEET		
8D009W9	B			A	-, -		

	<b></b>	۵	г	m		0	
		Contact Layout				Pa	anel Cutou
4	-X	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta positio ID A B C C Shell Arrangement Numb size no. conta 9 -98 3	+ 065 (1.65) + 038 (0.97) + 000 (0.00) - 075 (1.91) - 065 (1.65) + 038 (0.97) er of Size Service Contact Supersection Supersection			£ _	ØA	ØT
ω						Dim ØA ØAA R1 ØT	
	F				· · · · · · · · · · · · · · · · · · ·		
-	•					SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts wh by either of
N						PN: 80	Countr FR D009V
					A 03-10-20	016 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE		minium
<b>_</b>					SCALE NA	-{	eral linear erances: ±
					SOURIA	U WWW.SOUF	RIAU.C
				_	FORMAT A3		JRIAU 009W
	Н	G	F	E	D	C	

