т	വ	н <b>т</b>	m	0







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium		
	-Shell Plating	: Olive drab Cadmium		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
	-Temperature Range	-65℃ to +175℃		
	-Salt Spray	: 500 hours		

: 16.09 g ± 10%

8D 0

G

13

W

08

А


F

Е

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

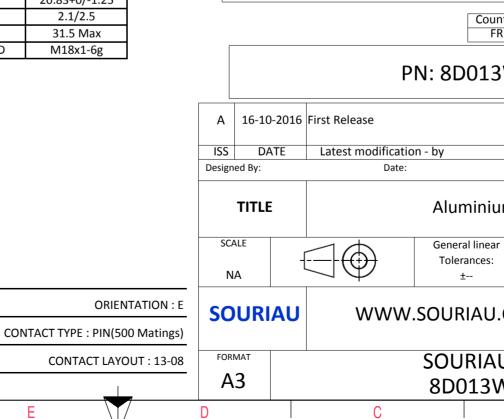

Φ				
			4	
S EXAMPLE			3	
R	mply with by a third party		2	
3W08AE				
	CUSTOMER DRAWING	MOD N°		
um Receptacle 8D series				
ar	NPRDS / PROJECT 859			
	This document is the prop	perty of	1	
I.COM	COM it must not be reproduced or communicated without permission			
U DRG N° SHEET				
W08AE-C		1/2		
В	I A			

	<b>工</b>	۵	н Г	m		0
		Contact Layout				Panel Cutout
4	х.	$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Con posi II A E C C C E F G C C	Uion D         X-axis (mm)         Y-axis (mm)           A         +.065 (1.65)         +.157 (3.99)           B         +.170 (4.32)         +.000 (0.00)           C         +.120 (3.05)        120 (3.05)           D         .000 (0.00)        170 (4.32)           E        120 (3.05)        120 (3.05)           F        170 (4.32)         +.000 (0.00)           S        065 (1.65)         +.157 (3.99)			₩ ₩	
ယ		mber of Size Service Contact Supersedes ntacts contacts rating location 8 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
S						Country FR PN: 8D013W
					A 16-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
<b>→</b>					SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT	
				_	A3	SOURIAU 8D013W0
	Н	G	F	E	D	C

