

T	۵	нт – – – – – – – – – – – – – – – – – – –	m	0



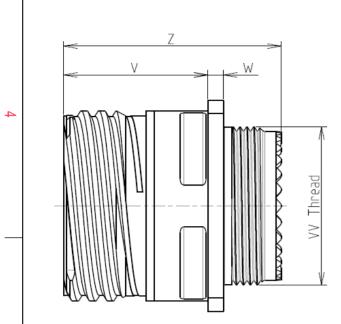

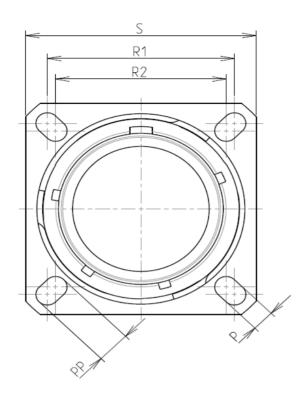

Keying Shown as example

Connector dimension

Dim

Nominal

3.25±0.2 4.93±0.2 26.97 24.61 33.3±0.3 20.83+0/-1.25 2.1/2.5 31.5 Max M25x1-6g

ORIENTATION : D

CONTACT LAYOUT : 17-75

CONTACT TYPE : SOCKET(500 Matings)

Е

CHARACTERISTICS

SHELL SIZE : 17

PLATING : S = Nickel

Н

ω


-Standard : Based on MIL-DTL-38999 Series III

Standard : Based on F	The Bite Sossis Series III				
– -Shell Material	P PP				
-Shell Plating	: Nickel	R1			
-Insulator	: Thermoplastic	R2			
-Contacts	: Copper Alloy	S V			
-Seals & Grommet	: Silicon Elastomer	Ŵ			
-Contact Plating	Z VV THREAD				
-Durability	Durability : 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	- 65°C to +200°C				
-Salt Spray	: 500 hours				
-Mass	: 80.87 g ± 10%				
BASIC SERIES:	8D 0 - 17 S 75 B D				
SHELL TYPE : Square	Flange Receptacle				
CONTACT TYPE : Sta	indard Crimp Contact				
	-Shell Material -Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souria -Temperature Range -Salt Spray -Mass BASIC SERIES: SHELL TYPE : Square	-Shell Material: Stainless Steel-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer-Contact Plating: Gold over copper Alloy 0.8µm minimum-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessories-Temperature Range: -65°C to +200°C-Salt Spray: 500 hours-Mass: 80.87 g ± 10%			

G

F

0		Φ		Þ	7
					4
LA	YOUT SHOWN AS EXA	AMPLE			3
due to a use the Specification	not be liable for any e of the Products whic s issued by either of t ional recommendatic	ch does not co he Parties or l	mply with by a third party		
	Country FR	Juriso	liction & Control List Not Listed		2
l	PN: 8D017S	75BD			
7 Drawing Update					
Latest modificati Date:			CUSTOMER DRAW	MOD N°	
	Stainless Stee	el Recepta			
	General linear Tolerances: <u>+</u>		NPRDS / PROJEC 859	CT	1
U WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
SOURIAU DRG N° SHEET]
С	8D017S7	BBD-C		A 1/2	J
· · · ·	1	U	I		

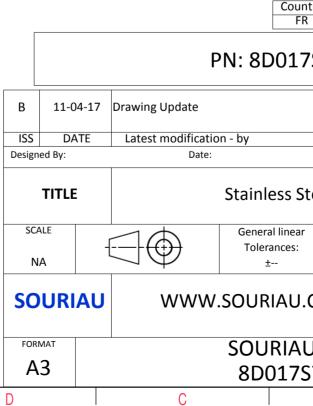

r	Ŧ	۵	н г	m	U	0	
		Contact Layout					Panel Cuto
4		75			Σ.	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			¥	Max. thickness panel for receptacle: Typ	Ø⊺ pe 0: front m
ω						Dim ØA ØAA R1 ØT	
	F					SOURIAU shall not be lia	
N						due to a use of the P the Specifications issued b (professional rec	by either
					B 11-04	PN: 8	
					ISS DAT Designed By: TITLE	E Latest modification - by Date:	nless St
<u> </u>					SCALE NA	Gene Tole	eral linear erances: ±
					FORMAT A3	SOL	JRIAU
l	Н	G	F	E	D	8D	0175

