
### **Mounting Option**


07-M3-0.5 Metric Threaded Inserts

#### **Contact Detail**


540-Wire Wrap .025 Sq.(0.64 Sq.) - Tail LG=.560(14.22)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

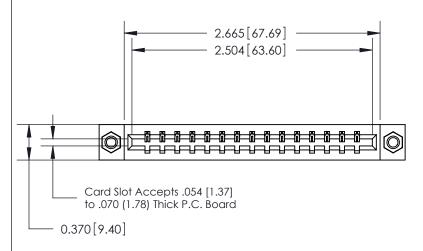

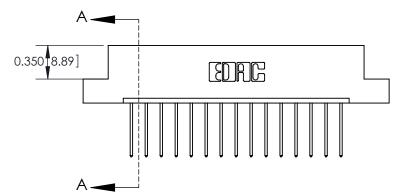





# **See Accompanying Page for:**

- Bend Detail
- **Mounting Options**
- **Features and Specifications**

| 333 Series Card Edge Connector |
|--------------------------------|
| Part Number: 333-015-540-107   |

YOUR CONNECTION TO QUALITY & SERVICE

|   | ACAD REFERENCE NO. 333 ENG MASTER |                  |  |
|---|-----------------------------------|------------------|--|
|   | DRAWN: J.LEE                      | DATE: OCT. 14/09 |  |
|   | CHECKED:                          | DATE:            |  |
|   | SCALE: NTS                        | SHEET 1 OF 4     |  |
| ) | DRAWING NUMBER                    | ISSUE            |  |

333 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



| 333 Series Card Edge Conn            | ACAD REFERENCE NO. 333 ENG MASTER   |                  |         |        |
|--------------------------------------|---|------------------|---------|--------|
| Contact Bend Detail                  | DRAWN: J.LEE  | DATE: OCT. 14/09 |         |        |
| Confact bend belaii                  |   | CHECKED:         | DATE:   |        |
| EDAC INC                             |   |                  | SHEET : | 2 OF 4 |
|                                      | TORONTO, ONTARIO  ARE THE PROPERTY OF EDAC INCAND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE | DRAWING NUMBER   |         | ISSUE  |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS  | 333 Assembly     |         | 1      |

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



1220F NOWRE

DRIGINAL

1



| 333 Series Card Edge Connector |                                      |  | ACAD REFERENCE NO. 333 ENG MASTER |             |         |           |
|--------------------------------|--------------------------------------|--|-----------------------------------|-------------|---------|-----------|
|                                | Mounting Options                     |  | DRAWN:                            | J.LEE       | DATE: O | CT. 14/09 |
|                                |                                      |  | CHECKED                           | ):          | DATE:   |           |
|                                | EDAC INC                             |  |                                   | NTS         | SHEET : | 3 OF 4    |
|                                | TORONTO, ONTARIO                     | ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE | DRAWING                           | NUMBER      |         | ISSUE     |
|                                | YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS   |                                   | 33 Assembly |         | 1         |

ISSUE NUMBER

ORIGINAL



## **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 333 Series Card Edge Connector    | ACAD REFERENCE NO. 333 ENG MASTER         |
|-----------------------------------|---|
| Features and Specifications       | DRAWN: J.LEE DATE: OCT. 14/09             |
| realities and specifications      | CHECKED: DATE:                            |
| EDAC INC THESE DRAWINGS A         | ND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4 |
| IORONIO, ONIARIO SHALL NOT BE REF | PRODUCED, OR COPIED DRAWING NUMBER ISSUE  |
|                                   | SALE OF APPARATUS 333 Accombly 1          |