DTHD06-1-4S
 ACTIVE

DEUTSCH | DEUTSCH DT, DEUTSCH DTHD

TE Internal #: DTHD06-1-4S Housing for Female Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTHD Housings



Connector & Housing Type: Housing for Female Terminals

Mating Pin Diameter: 5.72 mm [.225 in]

Connector System: Wire-to-Wire

Number of Positions: 1

Sealable: Yes

All DEUTSCH DTHD Housings (14)

Features

Product Type Features

Connector Shape	Circular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	1
Number of Rows	0
Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Housing for Female Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Body Features

Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	Size 4
Contact Type	Socket
Mating Pin Diameter	5.72 mm[.225 in]
Contact Current Rating (Max)	100 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	With
Mating Alignment Type	Polarizing Rib
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PEI (Polyetherimide)

Dimensions

Connector Height	27.33 mm[1.076 in]
Product Width	22.23 mm[.875 in]
Product Length	38.05 mm[1.498 in]
Accepts Insulation Diameter Range	6.63 – 10.67 mm[.261 – .42 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
Degree of Protection	Not Tested
UL Flammability Rating	Not tested
Packaging Features	
Packaging Quantity	800
Packaging Method	Box

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Housing for Female Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid




Also in the SeriesDEUTSCH DTImage: Algorithm of the SeriesImage: Algorithm of the SeriesImage: Algorithm of the SeriesImage: Algorithm of the SeriesAutomotive Connector Capes & Cover
(10)Algorithm of the SeriesImage: Algorithm of the SeriesImage: Algorithm of the SeriesAutomotive Connector Capes & Cover
(10)Algorithm of the SeriesImage: Algorithm of the SeriesImage: Algorithm of the SeriesImage: Algorithm of the SeriesAlgorithm of the SeriesImage: Algorithm of the SeriesImage: Algorithm of the SeriesImage: Algorithm of the SeriesAlgorithm of the Automotive Connector
Accessrines(11)Image: Algorithm of the Series(10)Image: Algorithm of the SeriesAlgorithm of the SeriesImage: Algorithm of the Series

Also in the Series DEUTSCH DTHD





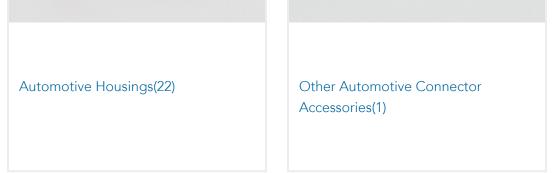


Customers Also Bought



Housing for Female Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid



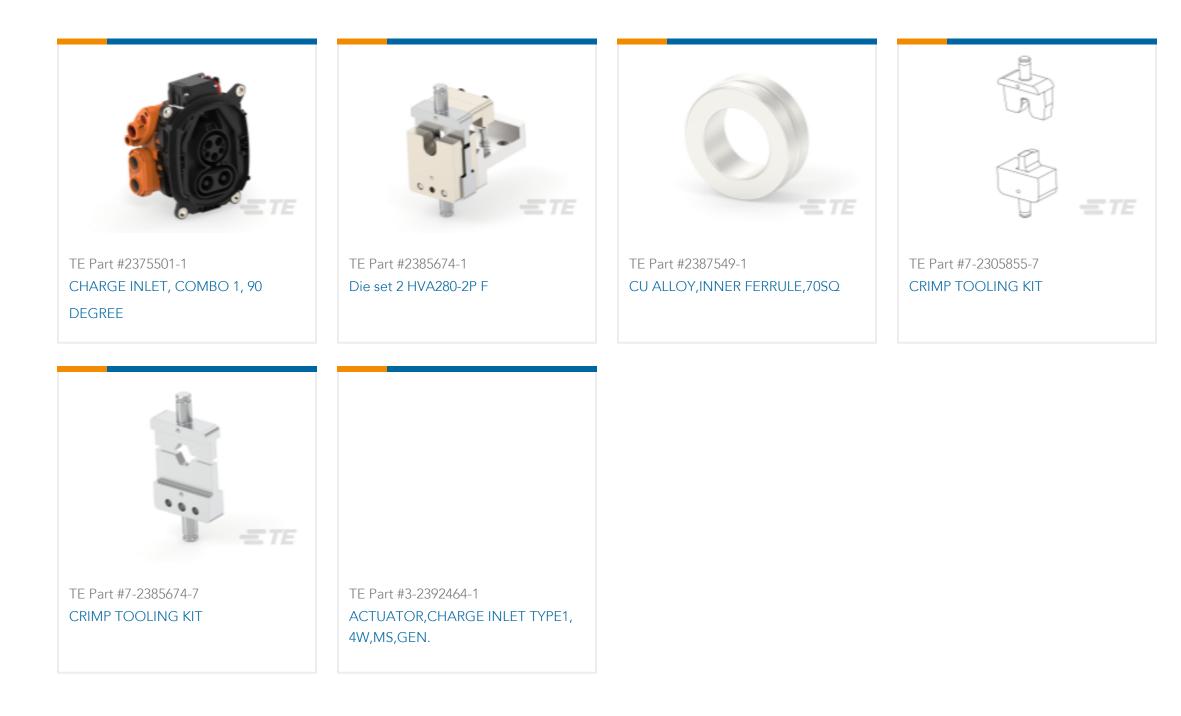

Documents

Product Drawings PLG, 1P, BLK, N, SIZE 4

English

CAD Files **Customer View Model** ENG_CVM_CVM_DTHD06-1-4S_99.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DTHD06-1-4S_99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTHD06-1-4S_99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Housing for Female Terminals, Wire-to-Wire, 1 Position, Sealable, Black, Wire & Cable, Power, Cable Mount (Free-Hanging), Hybrid

