

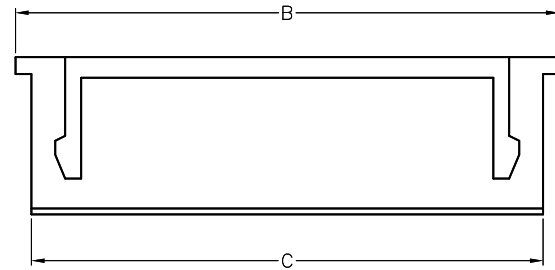
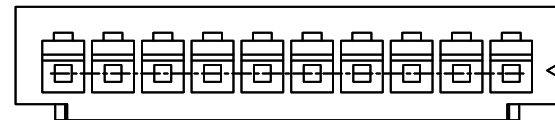


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/06	
A		PART REVISION	4/19/06	
B		ADDED DIM.	3/18/15	AY/RT
C		UPDATE DRAWING	4/13/18	AY/MY

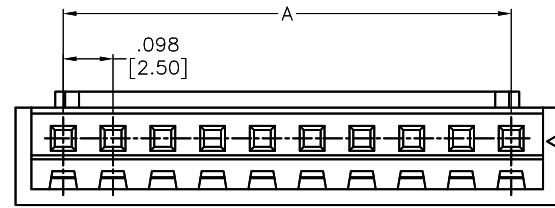

Positions: 2 thru 20  
 A = .098 [2.50] x No. of Spaces  
 B = .098 [2.50] x No. of Positions + .091 [2.30]  
 C = .098 [2.50] x No. of Positions + .028 [0.70]

**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon 66, rated UL 94V-0  
 Insulator color: Natural  
 Electrical:  
 Rated Voltage: 250V AC/DC  
 Rated Current: 3A AC/DC  
 Contact Resistance: 20 mohms max.  
 Insulation resistance: 1,000 Mohms min.  
 Withstand voltage: 1000V AC for 1 minute.  
 Temperature Rating:  
 -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X ± .10	∅.X ± .10	
.XX ± .020	∅.XX ± .015	
.XXX ± .015	∅.XXX ± .010	
APPROVALS		DATE
DRAWN	LFJ	4/13/06
CHECKED		
APPROVED		

**ADAM TECH INTERCONNECTS** 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

TITLE WIRE TO BOARD PITCH: 2.5MM CRIMP HOUSING STRAIGHT TYPE			
SIZE X	PART NO. 25CH-B-XX	REV. C	
REF: S00124T	SCALE: NTS	SHEET 1 OF 1	