

**Ratings**  
 Voltage: 300 V  
 Temperature: -25 ~ 80 °C  
 Flammability: VW-1


**Conductor**  
 Conductor count: 2  
 Gauge: 26 AWG 0.14 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\varnothing 0.16 \times 7$   
 Resistance at 20 °C: 150  $\Omega$  /km max

**Insulator**  
 Material: PVC  
 Color: black, red  
 Diameter:  $\varnothing 1.1 \pm 0.10$  mm  
 Nominal thickness: 0.29 mm  
 Resistance at 20 °C: 10 M $\Omega$  /km min

**Outer jacket**  
 Material: PVC  
 Color: white  
 Diameter:  $\varnothing 3.8 \pm 0.15$  mm  
 Nominal thickness: 0.80 mm

**Wire marking:** E339579 UL AWM STYLE 2464 26 AWG 80°C 300V VW-1 - - - cUL AWM I/II A 80°C 300V FT1 TENSILITY

**Tests**  
 Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113  $\pm 2$  °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Heat shock: 121  $\pm 1$  °C /1 hour, no observed degradation  
 Deformation: 121  $\pm 1$  °C /1 hour,  $\leq 50$  %  
 Cold bend: -10  $\pm 2$  °C /1 hour, no observed cracking

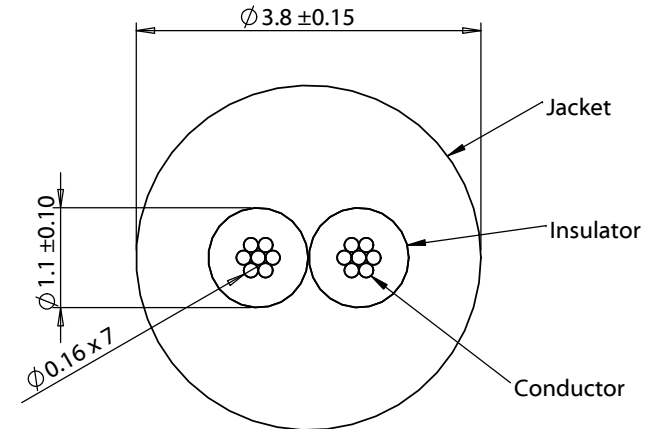

Revision:	Date:	Description:	Prepared:	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	01/22/2016	Initial release	Verified:	RoHS and REACH compliant Function test: no open, no short circuit, no intermittent	
A1	09/06/2018	Increased operating temperature range	Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Description:	Size: Part number:
				Wire, 2C TS, 26 AWG, UL2464, 300V, 80C, 3.8 mm, VW-1, PVC, white	A 30-00696
				Scale: 12:1	

5

4

3

2

1