



UNIT:MM

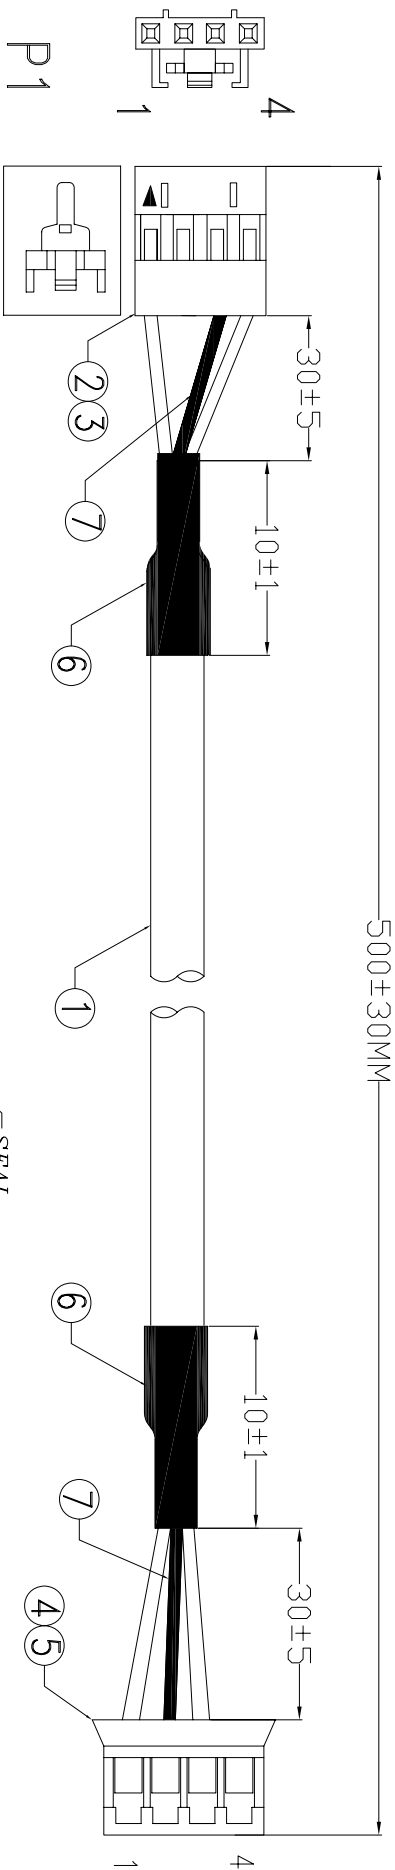

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 1 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

**PIN ASSIGNMENT:**

P1	WHITE	P2	
4	GND	1	
2	RED	2	
1		3	

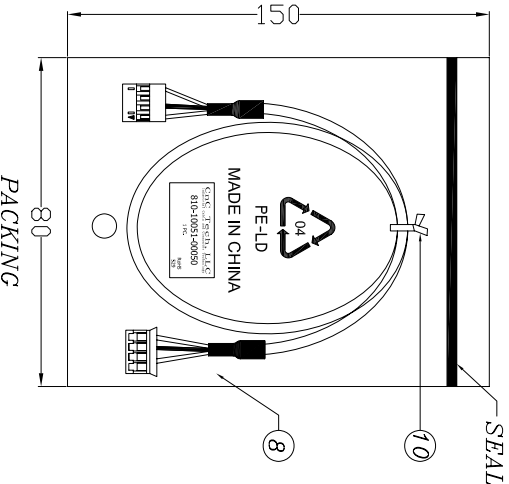

⑩	TIE	1	WHITE L=60mm
⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "10PCS" 及印生产周期,有透气孔.
⑧	PE BAG	1	CLEAR SIZE: 80*150*0.05mm PRINT BLACK"MADE IN CHINA"及印生产周期,有透气孔.
⑦	TUBE	2	HEAT SHRINK TUBE BLACK OD1.0* L=38±1mm
⑥	TUBE	2	HEAT SHRINK TUBE BLACK OD3.0* L=10±1mm
⑤	TER	3	PITCH2.0MM MATERIAL: PHOSPHOR BRONZE TIN-PLATED (ZYA2002H-4P)
④	HSG	1	PITCH 2.0mm 1*4P HSG WHITE (ZYA2002H-4P)
③	TER	3	杜邦 TER PH2.54mm MATERIAL: BRASS TIN-PLATED CRIMP TYPE
②	HSG	1	杜邦 HSG 1*4P PH:2.54mm COLOR: BLACK 带钩
①	CABLE	1	LU2547 28AWG*2C (WHITE, RED)+D JACKET GREY (A-112#) OD2.8mm L=500+5/-0MM
NO.	NAME	Q'TY	SPECIFICATION

**Cnc Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	810-10051-00050
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITEDN	A/0	PROJECTION	