

—	۵	П	m	D	0



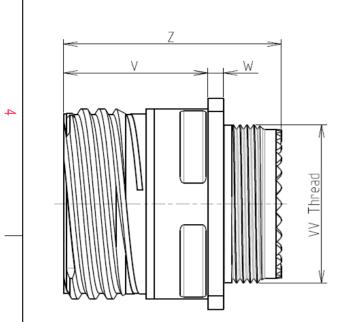

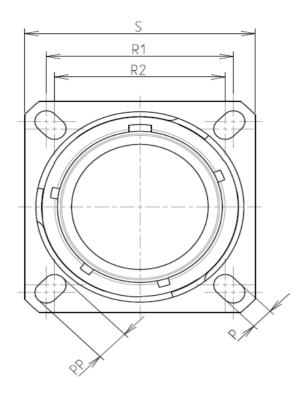

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			

: 30.12 g ± 10%

8D 0

G

11

S

02

В

F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : N

CONTACT LAYOUT : 11-02

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

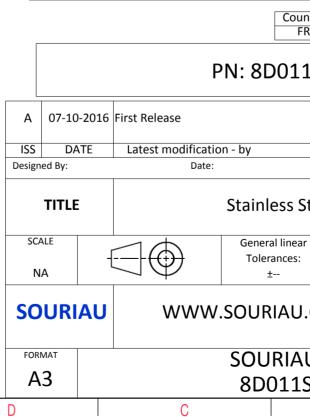

	ω		Þ			
					4	
AS EXA	MPLE				3	
which of the adation antry R	on-conformit n does not com ne Parties or b n, technical no Jurisd	mply with by a third part			2	
					-	
		CUSTOMF	R DRAWING	MOD N°		
Stee	Steel Receptacle 8D series					
ar	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N° 2BN-C			SHEET 1/2		
	В		A	1	L	

ſ	Ŧ	D	н П	m	D	0
		Contact Layout				Panel Cutou
4	-,	.095 (2.41mm)			2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	P	Contacts (Insert arrangement 11-2) contact Contact location (mm) Contact location (mm) ID X-axis (mm) Y-axis (mm) A +.095 (2.41) +.000 (.00) B 095 (2.41) +.000 (.00) ent Number of contacts Size contacts Service rating locat Contacts 2 16 I Al	tact Ion		¥.	Dim
ယ						ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D0115
					A 07-10-201 ISS DATE Designed By:	Latest modification - by Date:
_					SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.C SOURIAU 8D011S0
L	Н	G	F	E	D	C

