
<b>—</b>		 		
<u>_</u>	ر <u>ی</u>	 111	0	0





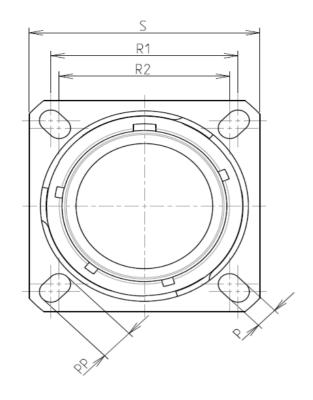

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souria	u contacts and Accessories
-Temperature Range	65°C to +200°C


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M25x1-6g


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-22



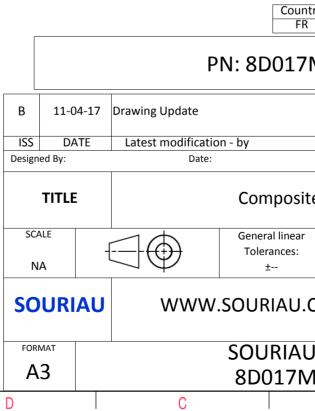

8D 0

G

17

Μ

22

Ρ

F

С

:

-Salt Spray : 2000 hours

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

 $\sim$ 

ယ

BASIC SERIES:

SHELL SIZE : 17

PLATING : M = Nickel

Н

σ		A			
				4	
IS EXAMPLE				3	
any non-conformit which does not co er of the Parties or k idation, technical n untry Jurisd R 7M22PC	mply with by a third party			2	
			MOD N°	-	
	CUSTOMER	DRAWING			
ite Receptacle 8D series					
ar	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N° M22PC-C			SHEET		
B		A	_, -	J	
-	•				

	<b>工</b>	G	гт —	m	Ū	0	
		Contact Layout					Panel Cut
4						SQUARE FLANGE RECEPTAC REAR MOUNTIN	LE (TYPE 0)
_		2#12 2#8 Triax	1				ØT.
	Ctc A B	17-22 X Y 0 4.57 6.32 0 0 4.57				Max. thickness panel fo	\ØA_ or receptacle: Type 0: front m Dim
ယ	C D	0 -4.57 -6.32 0				-	ØA ØAA
						Ł	R1 ØT
	<b>L</b>						
						due to a u the Specificati	all not be liable for a use of the Products v ons issued by either essional recommend
N							
							PN: 8D017
						1-04-17 Drawing Update DATE Latest modification	
					Designed B		te:
					TIT	LE	Composi
<b>→</b>					SCALE NA		General linear Tolerances: ±
					SOU	RIAU WW	W.SOURIAU.
					FORMAT A3		SOURIAU 8D017N
l	Н	G	F	E	D	C	

