

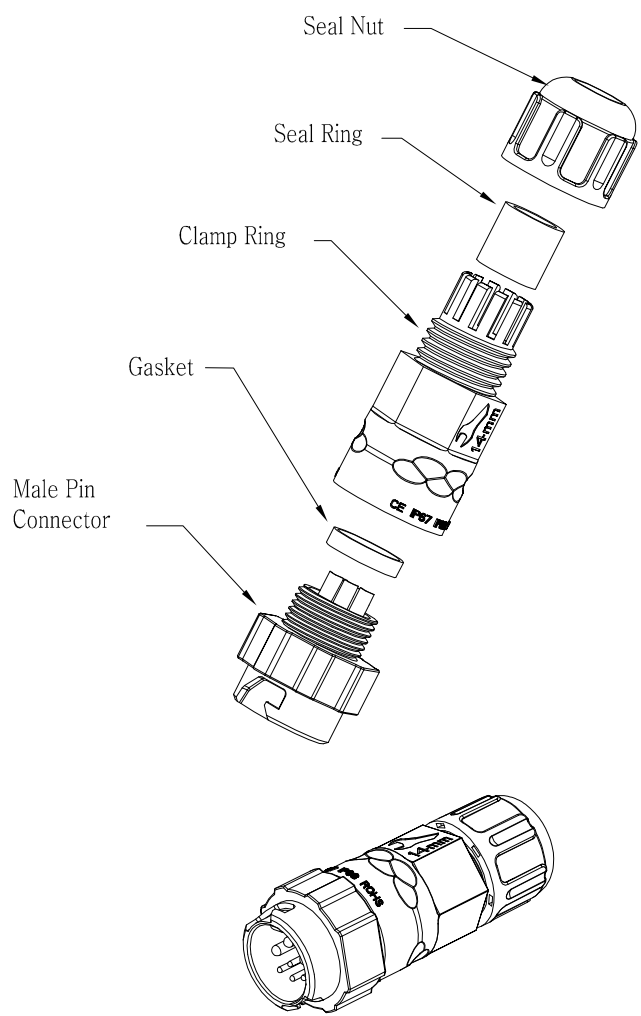
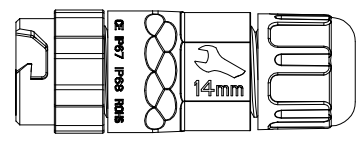



REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Yumer	2020/04/17

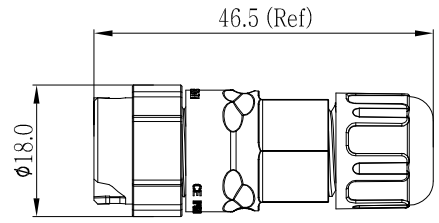

- Specification:
- 1.Operation Temperature:-45°C~105°C.
 - 2.Insulation Resistance:100MΩ at DC500V.
 - 3.Contact Resistance:<10mΩ.
 - 4.Withstand Voltage: 1300V AC
 - 5.Operating Current:10+ 2A
 - 6.Operating Voltage:AC 60V
 - 7.Waterproof Rate:IP67 (Mated)
 - 8.Seal Nut:Nylon, Black
 - 9.Seal Ring:Silicon, Black.
 - 10.Clamp Ring:Nylon, Black
 - 11.Gasket:Silicon, Red
 - 12.Male Pin:Copper Alloy, Gold Plated
 - 13.Connector:Nylon+ GF, Black
 - 14.RoHS Compliant.
 - 15.Cable Range OD:φ3.5mm~φ6.8mm
 - 16.Mating Cap:806-00062-00

22XXX331-01
Pin Number



3+4 Pin
P/N: 22304331-01
Pin Assignments
Front View

UNIT:mm	DESCRIPTION		PART NO	DRAWN BY	DATE
TOLERANCE	Standard Series Push Lock Female Plug With Male Pin		22XXX331-01	Yumer	2020/04/17
.X ±0.25	SCALE: 1:1	SHEET 1 OF 1	DWG NO	CHECKED BY	DATE
.XX ±0.15	REV. C1	SIZE A4	CUSTOMER	Ivan	2020/04/17
.XXX ±0.05	* :Inspection Item		APPROVED BY	Panson	DATE
ANGLES ±1°					2020/04/17



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.