





.XX ±0.13 .XXX ±0.10





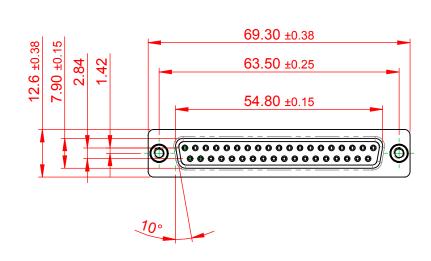





NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: 25mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

	628 SERIES D-SUB CONNECTOR		SW REFERENCE NO.: 628 ASSEMBLY		
628 SERIES D-SUB (DATE: AUG. 01/2	018	
			DATE:		
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: 1:1	SHEET 1 OF	1	
		DRAWING NUMBER: 628-0	37-228-548	ISSUE	
		PART NUMBER: 628-0	37-228-548	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.