

т	۵	п	m	0



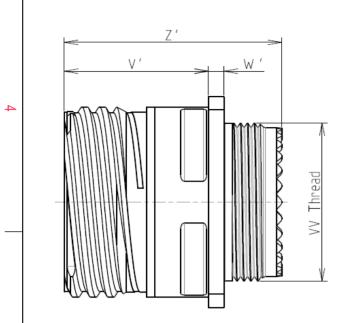



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 2000 hours -Salt Spray -Mass : 13.3 g ± 10%

8D 0

G

11

Μ

01

В


F

В

Dim	Nominal	
Р	3.25±0.2	
РР	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V'	19.5+1.4/-0	
W'	2.1/3.65	
Ζ'	32 Max	
VV THREAD	M15x1-6g	

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

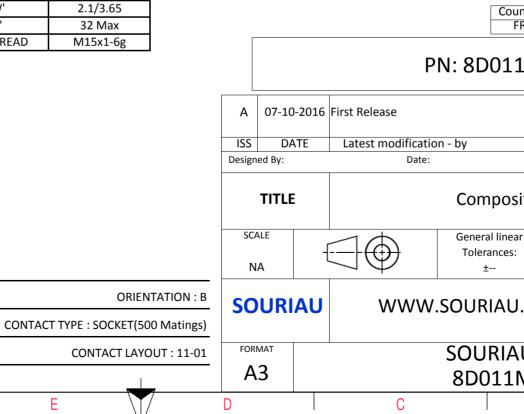

Β		A		_	
				4	
AS EXAMPLE				3	
any non-conformits which does not co er of the Parties or I ndation, technical n untry Jurisc FR 1M01BB	mply with by a third part			2	
				_	
	CUSTOMER	RDRAWING	MOD N°		
ite Receptacle 8D series					
ar	NPRDS / PROJECT 859				
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N°	1		SHEET		
M01BB-C		A	1/2	J	
U	I	Λ			

		۵	гт —	m		0
		Contact Layout				Panel Cutou
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		₩ ₩	ØT
ယ	A	0 0]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
2						Countr FR PN: 8D011N
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	Composite General linear Tolerances: ±
					FORMAT	SOURIAU
	H	G	F	E	A3	8D011M

