



S21 TRANS LOG MAG.  
▶ 0.000 dB 0.100 dB/DIU

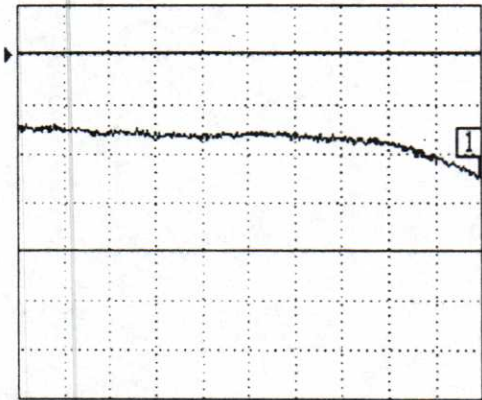


2.200000 GHz 2.720000

S11 REFL LOG MAG.  
▶ 0.000 dB 5.000 dB/DIU

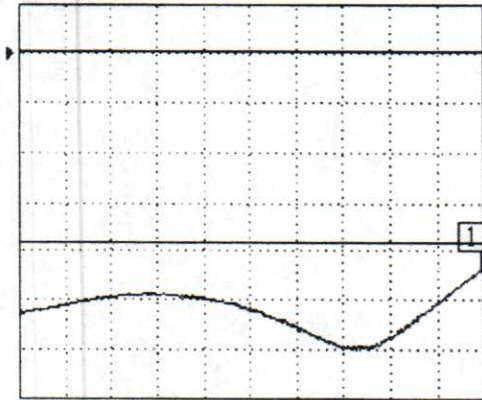


2.200000 GHz 2.720000

S22 REFL LOG MAG.  
▶ 0.000 dB 5.000 dB/DIU

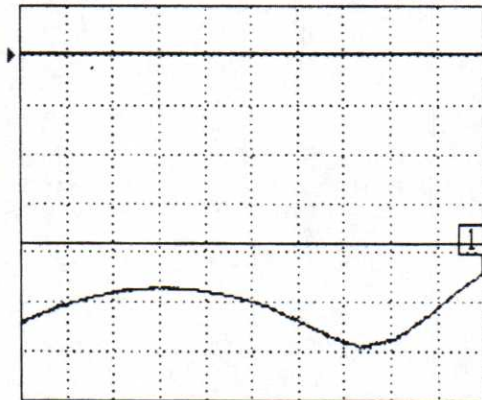

2.200000 GHz 2.720000

S12 TRANS LOG MAG.  
▶ 0.000 dB 5.000 dB/DIU

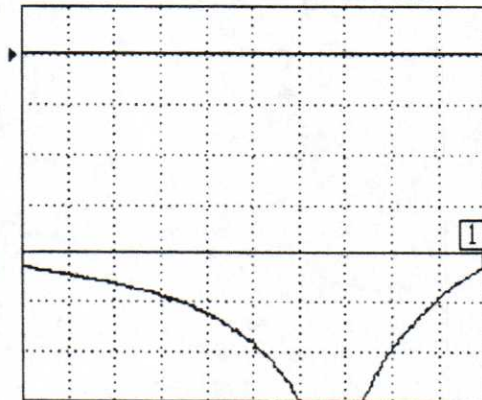

2.200000 GHz 2.720000

CH 1 - S21  
REFERENCE PLANE  
0.0000 mm

MARKER 1  
2.718700 GHz  
-0.251 dB

MARKER TO MAX  
▶ MARKER TO MIN

MARKER READOUT  
FUNCTIONS

D3I2327 - Isolator

Isolation : 20 dB Min

Insertion Loss: 0.40 dB Max

VSWR: 1.25:1 Max

SMA-F input / SMA-F output