


| ITEM | PART#     | DESCRIPTION                       | QTY | UOM |
|------|-----------|-----------------------------------|-----|-----|
| A,B  | 428160412 | MiniFit Sr Rcpt Hsg W/TPA 4Ckt    | 2   | PC  |
| C    | 428150032 | Mini Fit Sr Female Term 8 AWG SAu | 8   | PC  |
| D    | ---       | PAPER PRINTED PAPER WHITE         | 1   | PC  |

| FROM | TO | DESCRIPTION                 | COLOR |
|------|----|-----------------------------|-------|
| A1   | B4 | 1X8AWG DISC PVC BK UL 10669 | BLACK |
| A2   | B3 | 1X8AWG DISC PVC BK UL 10669 | BLACK |
| A3   | B2 | 1X8AWG DISC PVC BK UL 10669 | BLACK |
| A4   | B1 | 1X8AWG DISC PVC BK UL 10669 | BLACK |

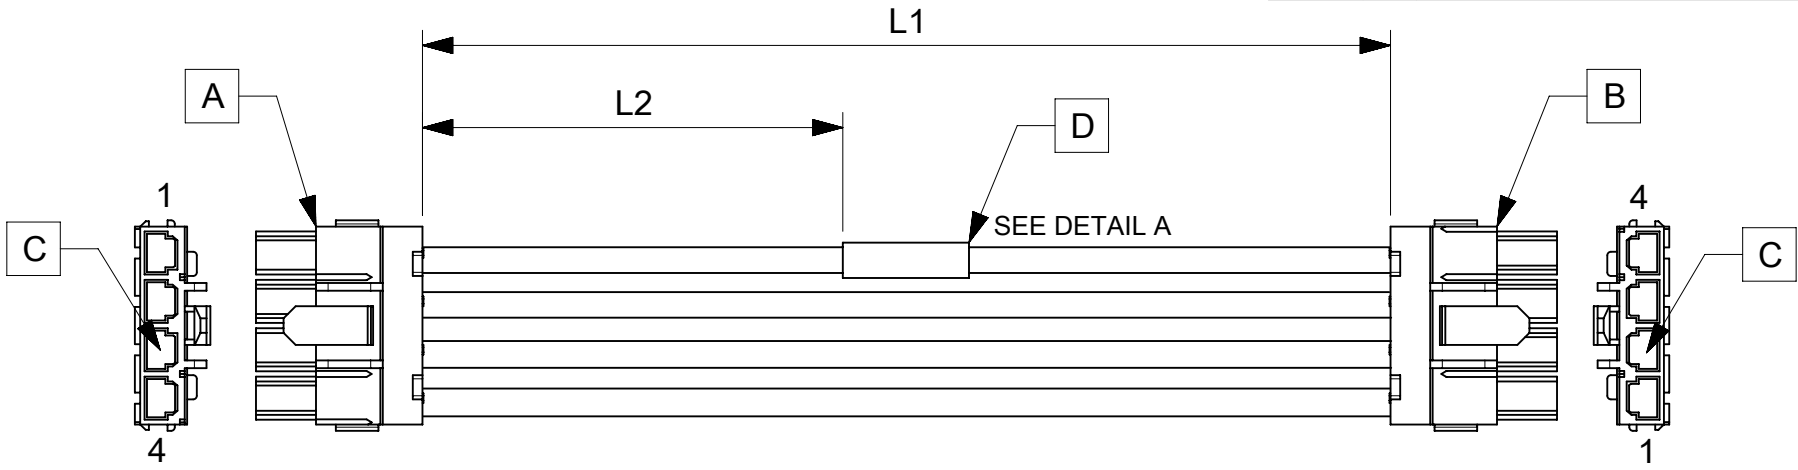

| TABLE       |         |        |                             |
|-------------|---------|--------|-----------------------------|
| PART NUMBER | L1      | L2     | TITLE                       |
| 369240401   | 150±10  | 63REF  | MINIFIT-SR 4 CIRCUIT 150MM  |
| 369240403   | 300±10  | 138REF | MINIFIT-SR 4 CIRCUIT 300MM  |
| 369240410   | 1000±15 | 488REF | MINIFIT-SR 4 CIRCUIT 1000MM |

**NOTES**

1. Cable assembly must pass 100% for continuity and polarity.
2. Label text must be 2mm max. in height with Arial font.
3. Connector view shown is from mating side.
4. Label must be wrapped on a single cable.

| REVISION   |     |                                      |         |
|------------|-----|--------------------------------------|---------|
| DATE       | REV | DESCRIPTION                          | CHANGER |
| 08/07/2019 | A   | INITIAL RELEASE                      | ARAJU   |
| 19/11/2019 | B   | CABLE CHANGED FROM UL1015 TO UL10669 | ARAJU   |

P/N:36924XXXX — MOLEX P/N  
 MOLEX  
 BATCH WK/YR  
 DETAIL A

|  |   |  |                        |        |                 |                                       |          |              |
|--|---|--|------------------------|--------|-----------------|---------------------------------------|----------|--------------|
| <b>SYMBOLS</b><br>DIMENSION UNITS: mm<br>SCALE: NTS<br>GENERAL TOLERANCES (UNLESS SPECIFIED)<br>ANGULAR TOL: ± °<br>4 PLACES: ±<br>3 PLACES: ±<br>2 PLACES: ±<br>1 PLACE: ±<br>0 PLACES: ±<br>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |  | CURRENT REV DESC:      |        |                 |                                       |          |              |
|  | EC NO: 629812   |  | DRWN: ARAJU 2019/11/19 |        |                 | SEE TABLE<br>PRODUCT CUSTOMER DRAWING |          |              |
|  | CHK'D: RDESAI01   |  | 2020/01/02             |        |                 |                                       |          |              |
|  | APPR: RDESAI01  |  | 2020/01/02             |        |                 |                                       |          |              |
|  | INITIAL REVISION:   |  | DRWN: ARAJU 2019/07/08 |        | DOCUMENT NUMBER | DOC TYPE                              | DOC PART | REVISION     |
|  | APPR: RDESAI01 2019/08/12   |  | 369240400              |        | PSD             | 000                                   | B        |              |
|  | THIRD ANGLE PROJECTION  |  | DRAWING                | SERIES | MATERIAL NUMBER | CUSTOMER                              |          | SHEET NUMBER |
|  |   |  | A4-SIZE                | 36924  | SEE TABLE       | GENERAL MARKET                        |          | 1 OF 1       |