

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM Pulse tone 24VAC/DC BU



| Part No.: | 699.350.75 | C F VROHS2 | | UK |
|-----------|------------|------------|----------|----|
| Series: | Kompakt 37 | C C ROHS2 | C GL) US | CA |

| MECHANICAL DATA | | |
|------------------------------|---------------------|--|
| Height | 209 mm | |
| Diameter | 38 mm | |
| Materials | PC | |
| Dome colour | Clear | |
| Housing colour | Silver | |
| Protection category | IP65 | |
| Connection | Cable | |
| cross-sectional area maximum | 0,34mm² / 22AWG | |
| Cable entry | Membrane grommet | |
| Cable entry minimum | d = 1 mm | |
| Cable entry maximum | d = 9 mm | |
| Cable length | 2000 mm | |
| Tension relief | Pull-out protection | |
| Type of fixing | Built-in mounting | |
| Working temperature minimum | -20°C | |
| Working temperature maximum | +50°C | |
| Weight with packaging | 239 g | |
| Product weight | 198 g | |

| ELECTRICAL DATA | |
|-----------------------------|--------------------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 160 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 In the connection area: 2 |

| OPTICAL DATA | | |
|----------------------|--------------------------------|--|
| Light source | LED | |
| Light colour | Blue Green Red Yellow | |
| Optical signal image | Permanent | |
| Service life optical | 50,000 h maximum | |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM Pulse tone 24VAC/DC BU

| ACOUSTIC DATA | | | |
|-----------------------------|-----------------|--|--|
| Volume (max) at 1m distance | 85,0 dB (A) | | |
| Acoustic signal image | Pulse tone | | |
| Audio frequency | 2900 Hz | | |
| Acoustic service life | 5,000 h minimum | | |


| APPROVAL DATA | | |
|-------------------------------|-----------------------|--|
| Conforms with CE | Yes | |
| WEEE | Yes | |
| Conforms with ATEX-directive | No | |
| Conforms with CCC | No | |
| Conforms with UL | cULus | |
| UL Type Rating | Type 12 Type 4X | |
| Conforms with FCC | No | |
| Conforms with IC | No | |
| EAC certificate available | Yes | |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) | |
| Conforms with AS-I | No | |
| ICAO Certification | No | |
| Conforms with DNV | No | |
| Conforms with RoHS CN | No | |
| Conforms with VdS | No | |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM Pulse tone 24VAC/DC BU

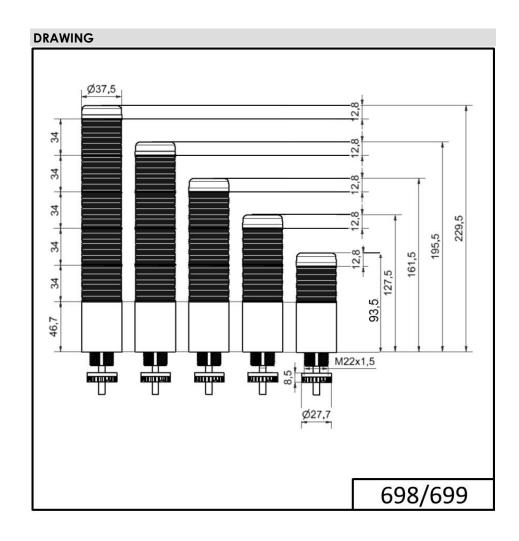

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.