


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
H	Add Part Number, See Page 2	3/31/16	J.C.
J	Engineering Update w/o Changes	5/13/16	J.C.
K	Corrected Typo Dimensions on Page 2 & 3	7/29/16	J.C.
L	ECO # 1014 , Update tables on Page 2 & 3 (EOL related)	6/6/2019	G. O.

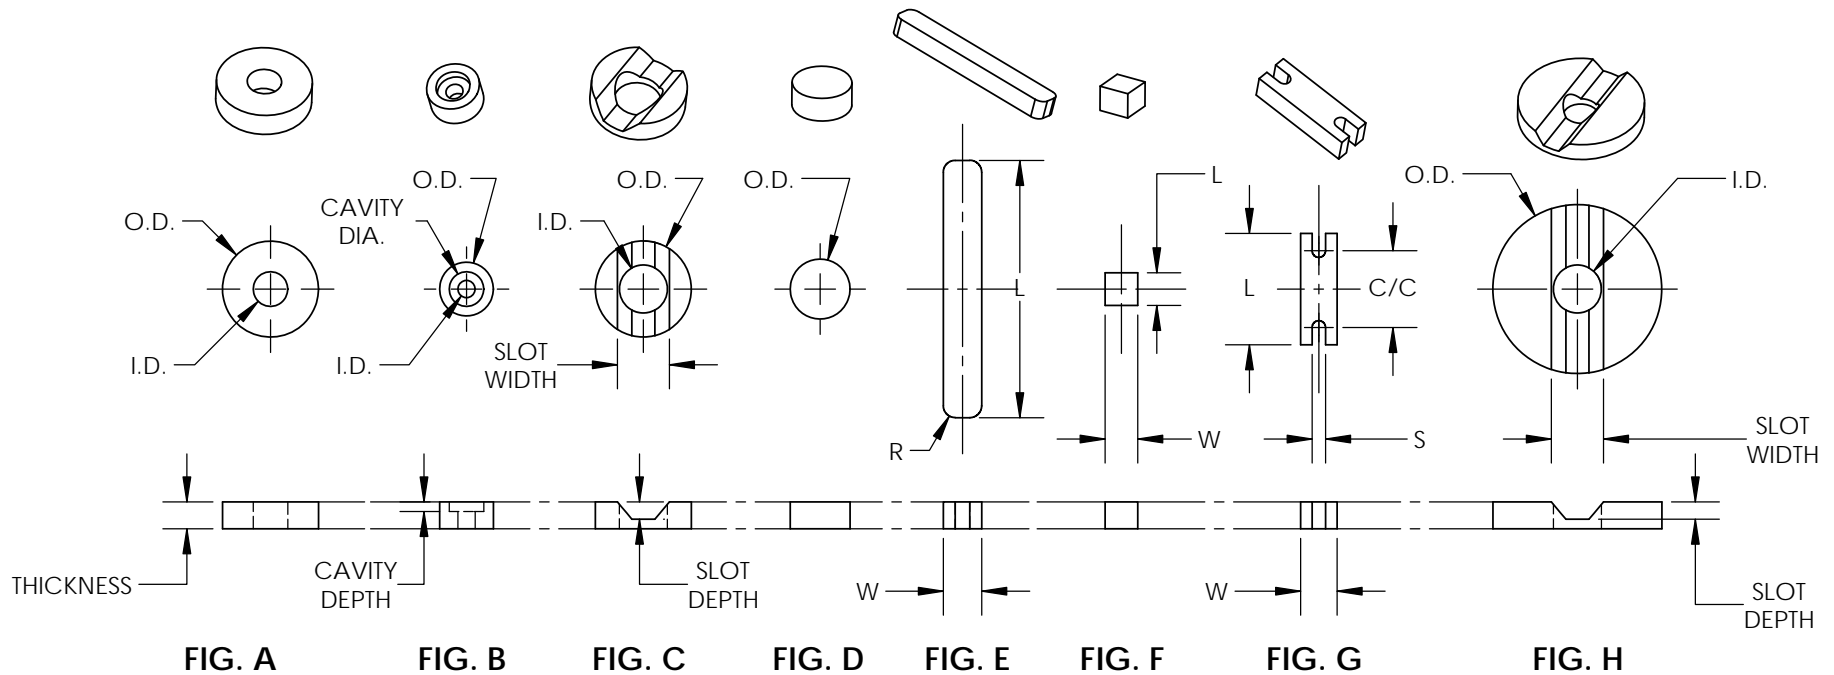

EXAMPLE:
TO-200-100 E


Suffix I.D. (see Table 1)

Part Thickness

TO Style

Series

SUFFIX I.D.	I.D. DESCRIPTION	NOTES
NONE	Wax	Offered for all part numbers
E	Effervescent	Offered for all part numbers
CR	Color Removed	Offered for all part numbers
DR	Detergent Removed	Offered for all part numbers
H	Salt	Not offered for P/Ns: TO-10, TO-11, TO-64, TO-65, TO-68
XH	Extra Hard	Not offered for P/Ns: TO-10, TO-11, TO-64, TO-65, TO-68

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
DECIMALS	ANGULAR		
.X ± .1	X° ± 1°	TITLE: DISS-O-PADS, WASH AWAY SPACERS PART NO: TO-XXX-XXX REVISION: L	
.XX ± .01			
.XXX ± .005			
DESIGNED: D.GREEN	DATE: 10/15/03	CAGE CODE: 32559	
REVISD: A.VALDEZ	DATE: 06/06/19		
CHECKED: A.VALDEZ	DATE: 06/06/19	SCALE: 1:1	SHEET # 1 OF 3
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING			

GENERAL PURPOSE

Part No	I.D.	O.D.	THICKNESS	FIG.
TO-46	.090 (2.3mm)	.250 (6.4mm)	.040, .050, .060, .070, .090, .100, .120, .130, .150, .200	A
TO-19	.250 (6.4mm)	.480 (12.2mm)	.040, .050, .060, .070, .090, .100, .120, .130, .150, .190	A
TO-22	.225 (5.7mm)	.437 (11.1mm)	.040, .050, .060, .070, .080, .090, .100, .110	A
TO-23	.090 (2.3mm)	.310 (7.9mm)	.040, .050, .055, .060, .070, .090, .100, .120	A
TO-24	.090 (2.3mm)	.340 (8.6mm)	.040, .050, .060, .070, .090, .100	A
TO-30	.275 (7.0mm)	.397 (10.0mm)	.040, .050, .060, .070, .090, .100	A
TO-25	.180 (4.6mm)	.480 (12.2mm)	.040, .050, .060, .070, .090, .100, .120, .130	A
TO-28	.172 (4.4mm)	.343 (8.7mm)	.040, .050, .060, .070, .090, .100, .120, .130	A
TO-41	.156 (4.0mm)	.360 (9.1mm)	.030, .040, .050, .060, .070, .090, .100, .120, .130, .140	A
TO-42	.250 (6.4mm)	.438 (11.1mm)	.040, .050, .060, .070, .090, .100, .120	A

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
-	See Sheet1	-	-

RECTANGULAR & SQUARE


Part No	L	W	R	THICKNESS	FIG.	SHAPE
TO-100	.670 (17.0mm)	.100 (2.5mm)	.031 (.79mm)	.030, .040, .045, .050, .060, .065, .070, .075, .080, .090, .100, .120, .130	E	Rectangular
TO-101	.562 (14.3mm)	.185 (4.7mm)	-	.030, .040, .050, .060, .070, .080, .090, .100, .120, .130, .150	E	Rectangular
TO-102	.505 (12.8mm)	.160 (4.1mm)	-	.040, .050, .060, .070, .090, .100, .120, .130, .150	E	Rectangular
TO-116	.666 (16.9mm)	.300 (7.6mm)	.063 (1.6mm)	.030, .040, .050, .055, .060, .065, .070, .075, .080, .090, .100, .110, .120, .125, .130, .150	E	Rectangular
TO-117	.666 (16.9mm)	.281 (7.1mm)	.100 (2.54mm)	.040, .050, .060, .070, .080, .090, .100, .120, .125, .130, .140	E	Rectangular
TO-118	.705 (17.9mm)	.260 (6.6mm)	.080 (2.0mm)	.030, .040, .050, .060, .070, .080, .090, .100, .110, .120, .130, .150	E	Rectangular
TO-120	.085 (2.2mm)	.085 (2.2mm)	-	.040, .045, .050, .060, .070, .090, .100	F	Square
TO-121	.095 (2.4mm)	.095 (2.4mm)	-	.040, .045, .050, .060, .070, .075, .085, .090, .095, .100	F	Square

RADIAL & AXIAL DEVICE

Part No	C/C	S	W	L	THICKNESS	FIG.
TO-200	.100 (2.5mm)	.035 (.89mm)	.095 (2.4mm)	.190 (4.8mm)	.040, .050, .060, .070, .080, .090, .100, .120, .130, .150	G
TO-201	.150 (3.8mm)	.035 (.89mm)	.095 (2.4mm)	.240 (6.1mm)	.040, .050, .060, .070, .090, .100, .120, .130	G
TO-203	.200 (5.1mm)	.035 (.89mm)	.095 (2.4mm)	.290 (7.4mm)	.040, .050, .060, .070, .090, .100, .120, .130	G
TO-204	.250 (6.4mm)	.040 (1.0mm)	.145 (3.7mm)	.340 (8.6mm)	.040, .050, .060, .070, .080, .090, .100, .120, .130	G
TO-205	.300 (7.6mm)	.040 (1.0mm)	.145 (3.7mm)	.390 (9.9mm)	.040, .050, .060, .070, .090, .100, .120, .130, .150	G
TO-206	.400 (10.2mm)	.045 (1.1mm)	.195 (5.0mm)	.490 (12.4mm)	.040, .050, .060, .070, .080, .090, .100, .120, .130, .150	G
TO-207	.500 (12.7mm)	.045 (1.1mm)	.195 (5.0mm)	.590 (15.0mm)	.040, .050, .060, .070, .090, .100, .120, .130	G

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)	
DECIMALS	ANGULAR
.X ± .1	X° ± 1°
.XX ± .01	
.XXX ± .005	

BIVAR[®]
 4 THOMAS, IRVINE, CA. 92618
 TEL: (949) 951-8808 FAX: (949) 951-3974



TITLE: DISS-O-PADS, WASH AWAY SPACERS

DESIGNED: D.GREEN	DATE: 10/15/03	PART NO: TO-XXX-XXX	REVISION: L
REVISED: A.VALDEZ	DATE: 06/06/19	CAGE CODE: 32559	
CHECKED: A.VALDEZ	DATE: 06/06/19	SCALE: 1:1	SHEET # 2 OF 3

CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING

TO-5							
Part No	I.D.	O.D.	THICKNESS			FIG.	TO--5
TO-5	.225 (5.7mm)	.375 (9.5mm)	.040, .050, .060, .070, .085, .090, .100, .120, .130, .150			A	Spacer
TO-6	.250 (6.4mm)	.375 (9.5mm)	.040, .050, .060, .070, .090, .100, .120, .130, .150			A	I.C. Spacer
TO-9	.300 (7.6mm)	.437 (11.1mm)	.040, .050, .070, .080, .090, .100, .120, .130, .150, .180			A	-
TO-13	.225 (5.7mm)	.310 (7.9mm)	.050, .060, .070, .080, .090, .100, .120, .130			A	Epoxy Case



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
-	See Sheet1	-	-

TO-18								
Part No	I.D.	O.D.	CAVITY DIA.	CAVITY DEPTH	THICKNESS		FIG.	TO-18
TO-12	.125 (3.2mm)	.310 (7.9mm)	.215 (5.5mm)	.065 (1.7mm)	.080, .090, .100, .120		B	.250 (6.4mm) L.S.
TO-16	.125 (3.2mm)	.205 (5.2mm)	-	-	.040, .045, .050, .060, .070, .080, .090, .100, .120, .130, .150, .175, .200		A	Epoxy Case
TO-17	.170 (4.3mm)	.250 (6.4mm)	-	-	.035, .040, .050, .060, .070, .090, .100, .120, .130, .140, .150, .170, .180, .200		A	Thin Walls
TO-18	.125 (3.2mm)	.250 (6.4mm)	-	-	.040, .045, .050, .055, .060, .070, .080, .090, .100, .120, .125, .130, .150, .170, .190		A	Standard
TO-20	.125 (3.2mm)	.290 (7.4mm)	.200 (5.1mm)	.065 (1.7mm)	.070, .090, .100, .120, .130, .150		B	.200 (5.1mm) L.S.
TO-27	.125 (3.2mm)	.290 (7.4mm)	-	-	.040, .050, .060, .070, .090		A	Heavy Walls

AXIAL								
Part No	I.D.	O.D.	THICKNESS			SLOT DEPTH	SLOT WIDTH	FIG.
TO-21	.125 (3.2mm)	.250 (6.4mm)	.050, .070, .080, .090, .100, .120, .130, .150,			.045 (1.1mm)	.060 (1.5mm)	C
TO-35	-	.440 (11.2mm)	.100, .120, .130, .140, .150, .170, .180, .190, .220			.065 (1.7mm)	.230 (5.8mm)	H
TO-36	-	.187 (4.7mm)	.050, .060, .070, .080, .090, .100, .120, .130, .150			.040 (1.0mm)	.080 (2.0mm)	H
TO-37	-	.156 (4.0mm)	.050, .070, .080, .090, .100, .120			.025 (.64mm)	.050 (1.3mm)	H

ON-END/CORDWOOD							
Part No	I.D.	O.D.	CAVITY DIA.	CAVITY DEPTH	THICKNESS		FIG.
TO-7	.075 (1.9mm)	.175 (4.4mm)	-	-	.030, .040, .050, .060, .070, .090, .100, .120, .130, .150		A
TO-8	.062 (1.6mm)	.156 (4.0mm)	-	-	.030, .035, .040, .050, .055, .060, .065, .070, .080, .085, .090, .100, .105, .120, .130, .150, .160		A
TO-10	.040 (1.0mm)	.085 (2.2mm)	-	-	.030, .040, .050, .060, .065, .070, .080, .090, .100		A
TO-11	.045 (1.1mm)	.100 (2.5mm)	-	-	.030, .040, .050, .060, .070, .080, .100		A
TO-26	.070 (1.8mm)	.187 (4.7mm)	-	-	.030, .040, .050, .060, .070, .090, .100, .120		A
TO-40	.045 (1.1mm)	.156 (4.0mm)	-	-	.030, .040, .050, .060, .070, .080, .090, .100, .120, .130, .150		A
TO-64	.045 (1.1mm)	.140 (3.6mm)	-	-	.030, .035, .040, .050, .060, .070, .090, .100, .120, .125, .130, .140, .150		A
TO-65	.075 (1.9mm)	.140 (3.6mm)	-	-	.030, .035, .040, .045, .050, .060, .070, .080, .090, .100, .120, .125, .130		A
TO-67	.045 (1.1mm)	.140 (3.6mm)	.090 (2.3mm)	.025 (.64mm)	.050, .055, .060, .070, .090		B
TO-68	.045 (1.1mm)	.110 (2.8mm)	.075 (1.9mm)	.025 (.64mm)	.040, .050, .055, .060, .070, .090, .100, .120, .130		B

SOLID				
Part No	I.D.	O.D.	THICKNESS	FIG.
TO-29	-	.156 (4.0mm)	.040, .050, .060, .070, .090, .100	D
TO-31	-	.125 (3.2mm)	.040, .050, .060, .070, .090, .100, .120, .130	D
TO-32	-	.187 (4.7mm)	.030, .040, .050, .060, .070, .080, .090, .100	D
TO-33	-	.250 (6.4mm)	.030, .040, .050, .060, .070, .080, .090, .100, .120, .130	D
TO-34	-	.375 (9.5mm)	.040, .050, .060, .070, .090, .100	D

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 BIVAR [®] 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974			
DECIMALS	ANGULAR				
.X ± .1	X° ± 1°	 TITLE: DISS-O-PADS, WASH AWAY SPACERS			
.XX ± .01					
.XXX ± .005		DESIGNED: D.GREEN	DATE: 10/15/03	PART NO: TO-XXX-XXX	REVISION: L
		REVISED: A.VALDEZ	DATE: 06/06/19	CAGE CODE: 32559	
		CHECKED: A.VALDEZ	DATE: 06/06/19	SCALE: 1:1	SHEET # 3 OF 3
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING					