

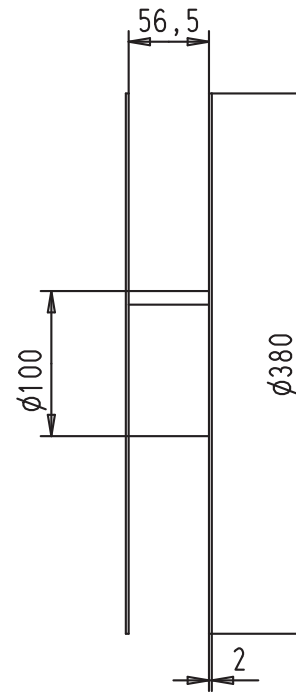
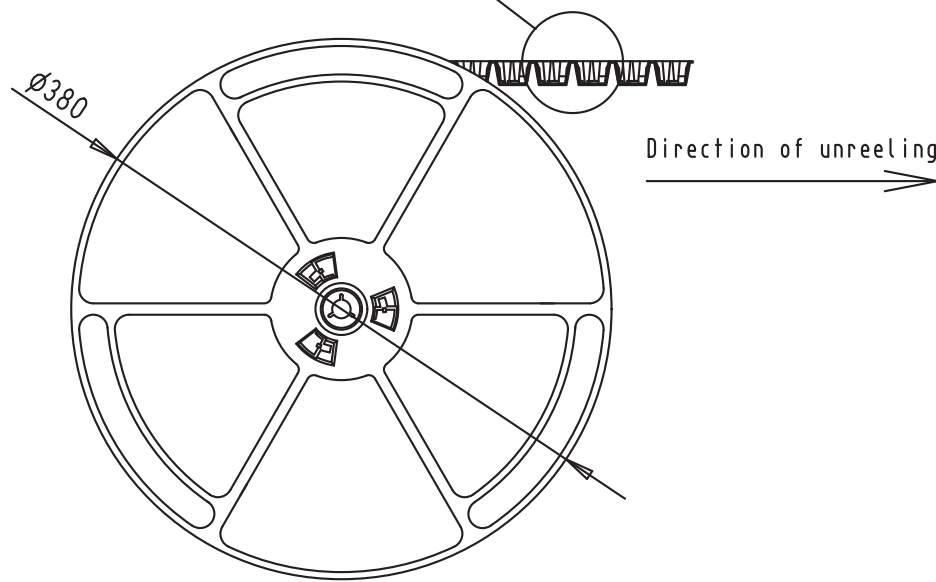
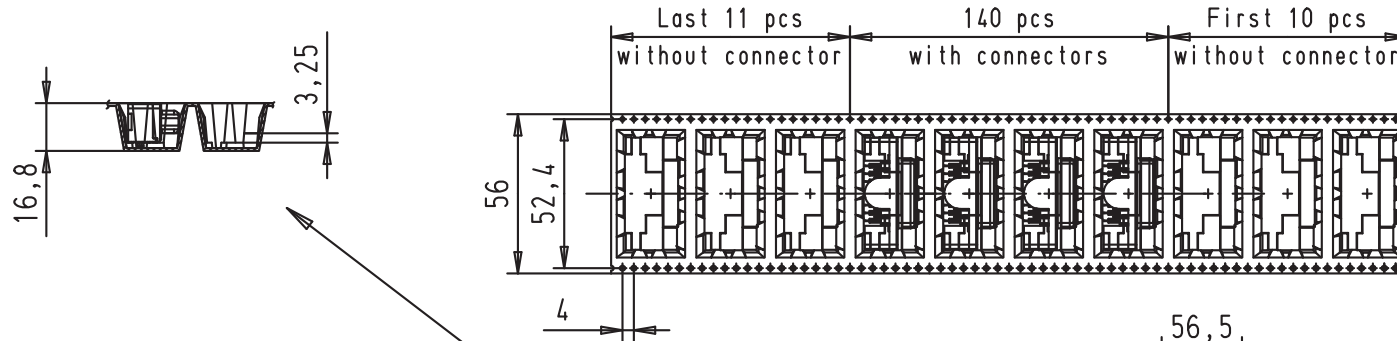


PCB Layout, component side (thickness 1,6mm min.)

Max. Temperature: 260°C during 10 seconds



09552563612.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors) see page 2/2							 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Standard Female 15p with die casted grounds and nuts	Maßstab/ Scale  1,5:1	
09552566612.741	2													
09552567612.741	3	M3	Black Insulator	Reel Packaging (140 connectors) see page 2/2	EC02316	30Aug2010	ED	Insp.				TB 09 55 256 x61x	Blatt/ Page 1 / 2	
09552563611.741	1													
09552566611.741	2													
09552567611.741	3													
Part number	PL	Thread	Index designation	Mod.	Dot.	Name	HARTING EURL F-95972 Paris			Sub.				

Alle Rechte vorbehalten/ All rights reserved



See TB 09 55 256 x61x folio 1/2 for connector dimensions and PCB layout

Packaging in accordance with EIA 481-2-A

09552563612.741	1	4-40 UNC	Black Insulator	Reel Packaging (140 connectors)					Det.	Name	 All Dim. in mm Orig. Size DIN A 4	D-SUB SMT Standard Female 15p with die casted grounds and nuts	Maßstab/ Scale	
09552566612.741	2								Detail.	17Jul2006				ED
09552567612.741	3								Insp.					
09552563611.741	1	M3			EC02316	30Aug2010	ED	Stand.				TB 09 55 256 x61x	Blatt/ Page 2 / 2	
09552566611.741	2													
09552567611.741	3													
Part number	PL	Thread	Index designation		Mod.	Det.	Name	HARTING EURL F-95972 Paris			Sub.			