
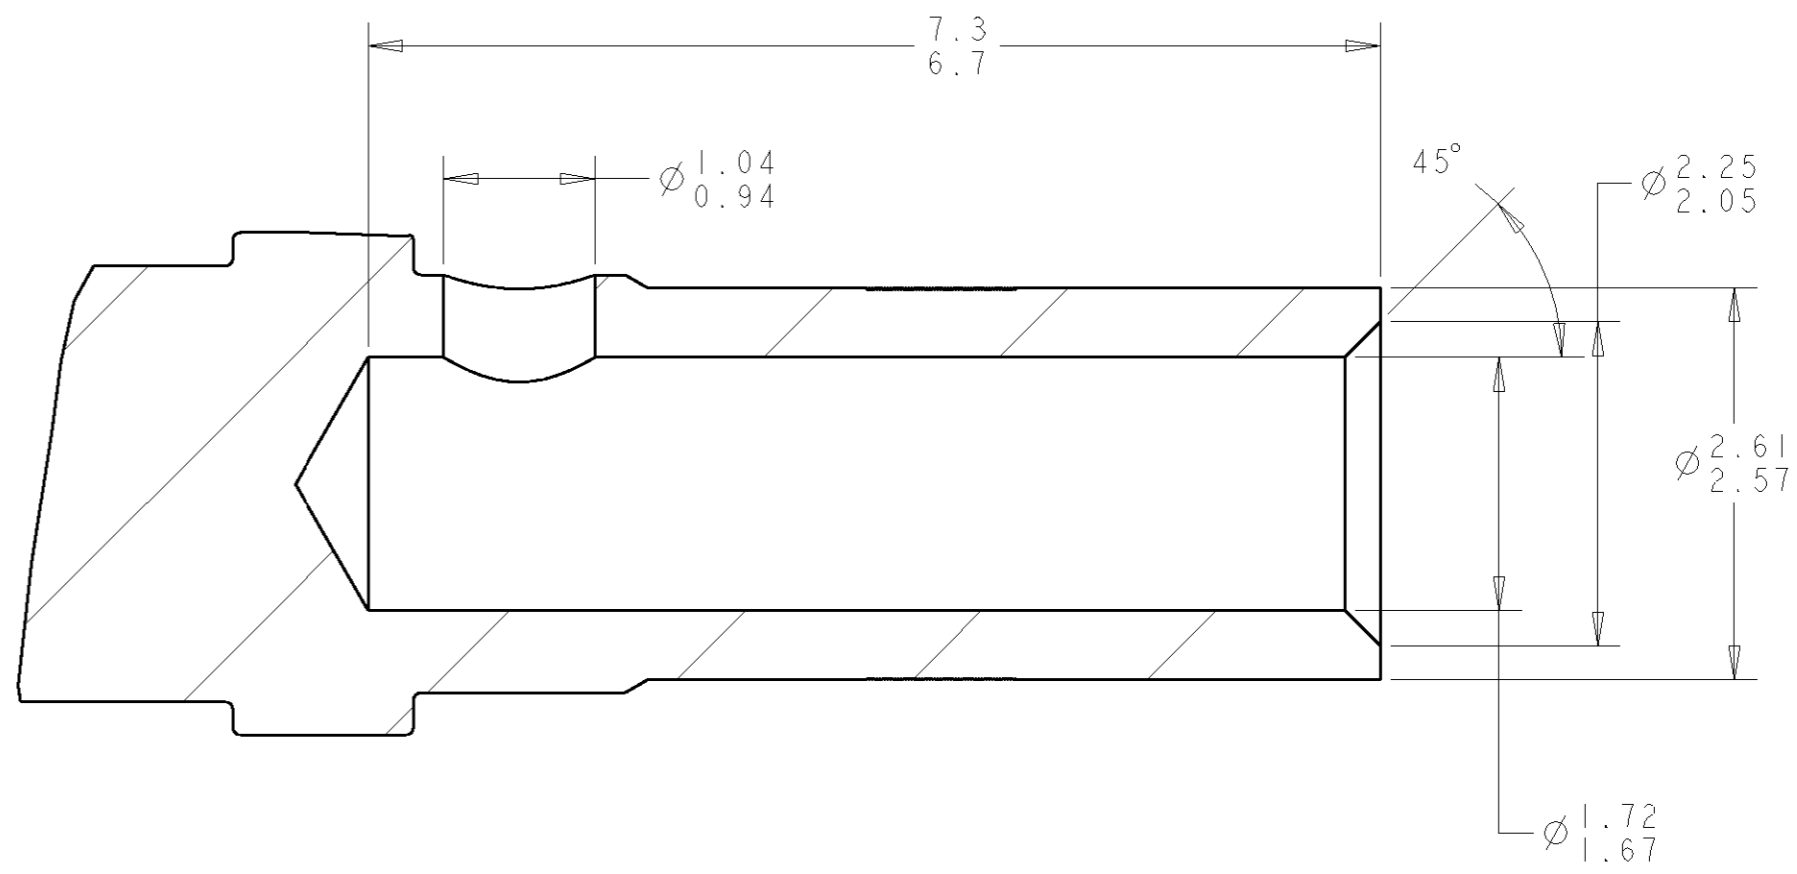


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DF	A5	P	LTR	DESCRIPTION	DATE	DWN	APVD
		1		PROPOSED	25OCT05	BH	JPM

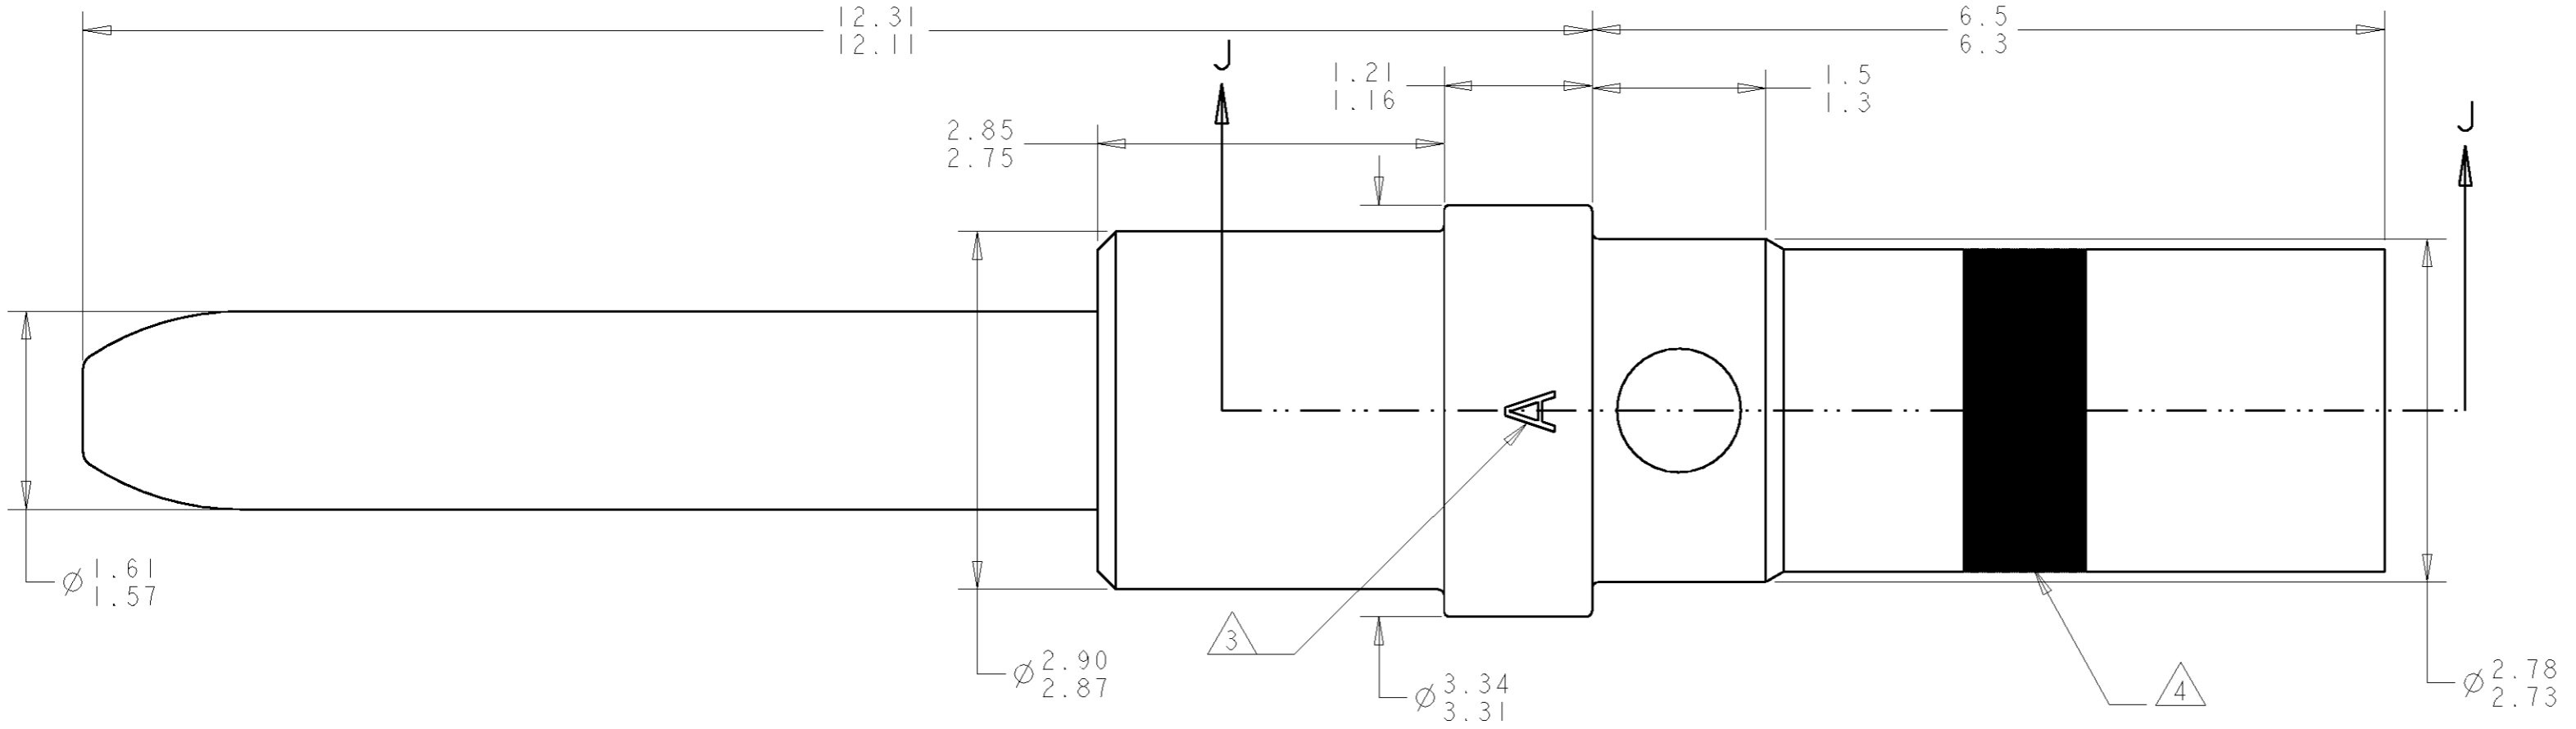

- 1 COPPER ALLOY C97
- 2 1.27µm MIN GOLD PER ASTM B488 OVER 2.54µm MIN NICKEL PER QQ-N-290 ON ENTIRE STOCK.
- 3 OPTIONAL ALTERNATE MARKING: LETTER "S"
- 4 BLUE COLOR BAND

- 5. APPLICABLE WIRE SIZE: 16-18-20 AWG
 WIRE INSULATION DIAMETER: 2.6 mm MAX
 INSULATION STRIP LENGTH: 6.0-6.5mm
- 6. APPLICATION TOOLING:
 CRIMPING TOOL: TYCO PART NUMBER 601967-1 (M22520/1-01)
 POSITIONER: TYCO PART NUMBER 601967-2 (M22520/1-02)
 SELECTOR POSITION: AWG 16: 6
 AWG 18: 5
 AWG 20: 4
 CONTACT INSERTION/EXTRACTION TOOL: 91066-3 (M81969/1-03)

7. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER A LICENSE FROM RADIAL SA.

1738013-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN	BH	25OCT2005	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS:		CHK	JPM	25OCT2005		
mm		APVD	JPM	25OCT2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC				
0 PLC ±		APPLICATION SPEC			NAME	PIN CONTACT, SIZE 16, GPR
1 PLC ±0.1		WEIGHT			SIZE	A200779
2 PLC ±0.05		CUSTOMER DRAWING			CAGE CODE	C-1738013
3 PLC ±		SCALE	20:1	SHEET	OF	REV
4 PLC ±						
ANGLES ±						
FINISH						