1SNK922303R0000 - ACTIVE

ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK922303R0000 Terminal Block & Strip Conducting Accessories, Jumper Bar, 3 Pole, Product Spacing .866 in [22 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK

View on TE.com >



Connectors > Terminal Blocks & Strips > Terminal Block & Strip Accessories > Terminal Block & Strip Conducting Accessories



Conducting Accessory Type: Jumper Bar

Number of Poles: 3

PCB Mount Retention Type: Screw

Product Spacing: 22 mm [.866 in]

Contact Current Rating (Max): 192 A

Features

Product Type Features

Conducting Accessory Type

Jumper Bar

Configuration Features

Number of Poles

3

Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	175 A
Power Loss	6.1 W
Dielectric Withstanding Voltage (Max)	2200 V
Short-Time Withstanding Current Rating @ 1s	8400 A
Voltage Rating (IEC)	1000 V
Current Rating (UL)	175 A
Current Rating (IEC)	192 A
Body Features	
Product Weight	43.3 g[1.527 oz]
Plastic & Resin Material Type	Polyamide

Terminal Block & Strip Conducting Accessories, Jumper Bar, 3 Pole, Product Spacing . 866 in [22 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



Contact Features

Contact Current Rating (Max)	192 A
Mechanical Attachment	
Tightening Torque	17.7 in-lbs
PCB Mount Retention Type	Screw
Dimensions	
Tool Size	4 mm[.157 in]
Product Depth	20.7 mm[.815 in]
Product Width	22 mm[.866 in]
Product Height	57 mm[2.244 in]
Product Spacing	22 mm[.866 in]
Usage Conditions	
Installation Temperature Range	-5-40 °C[23-104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Industry Standards	
IP Rating	IP20

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these

Terminal Block & Strip Conducting Accessories, Jumper Bar, 3 Pole, Product Spacing . 866 in [22 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts








TE Part # 1SNK522060R0000 ZS70-YL



Also in the Series | ENTRELEC SNK

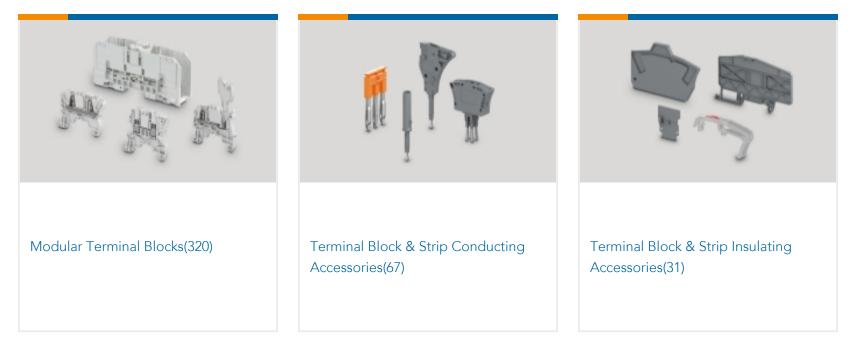

Customers Also Bought

Terminal Block & Strip Conducting Accessories, Jumper Bar, 3 Pole, Product Spacing . 866 in [22 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK







TE Part #1SNK916310R0000 JB16-10



TE Part #1SNA176736R2100 BJMI5D-2

Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1SNK922303R0000_A.2d_dxf.zip English

Customer View Model

ENG_CVM_CVM_1SNK922303R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK922303R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Catalogue - ENTRELEC terminal-blocks-sna-series

English

ENTRELEC Terminal Block - Master Catalog

Terminal Block & Strip Conducting Accessories, Jumper Bar, 3 Pole, Product Spacing . 866 in [22 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



ENTRELEC Terminal Block - Master Catalog

English

JB22-3

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese

Product Environmental Compliance Product Compliance

English

Product Compliance

English