<b>T</b> 1	0		
	, T		







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 25

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material : Aluminium			
	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered without Souriau contacts			
	-Temperature Range	<u>∶</u> -65°C to +200°C		
	-Salt Spray	: 48 hours		
	-Mass	: 61.26 g ± 10%		

8D 0

G

25

F

35

S

F

A L

Dim	Nominal
Р	3.91±0.2
PP	6.15±0.2
R1	38.1
R2	34.93
S	46±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M37x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 25-35

CONTACT TYPE : SOCKET(500 Matings)

Е

**ORIENTATION : A** 



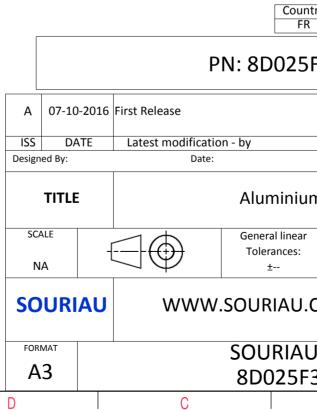

Ξ	Þ				
R		4			
		3			
	rmity or damage				
which does not comply with r of the Parties or by a third party dation, technical notice.) ntry Jurisdiction & Control List R Not Listed					
5F35SAL		2			
1	MOD N°				
um Recept	n Receptacle 8D series				
	NPRDS / PROJECT <b>859</b>	1			
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N F35SAL-C					
B		J			

