

MIRELLA-G2-M

~25° wide beam. Compatible with LEDiL HEKLA.

TECHNICAL SPECIFICATIONS:

Ø 49.9 mm **Dimensions** Height 22.6 mm socket Fastening **ROHS** compliant yes 🕕



MATERIAL SPECIFICATIONS:

Component **Type** Material PC

MIRELLA-G2-M Reflector Colour **Finish** Coating metal

ORDERING INFORMATION:


Component

F15559_MIRELLA-G2-M

» Box size: 480 x 280 x 300 mm


Qty in box MOQ MPQ Box weight (kg) 336 28 3.2

PRODUCT DATASHEET F15559_MIRELLA-G2-M

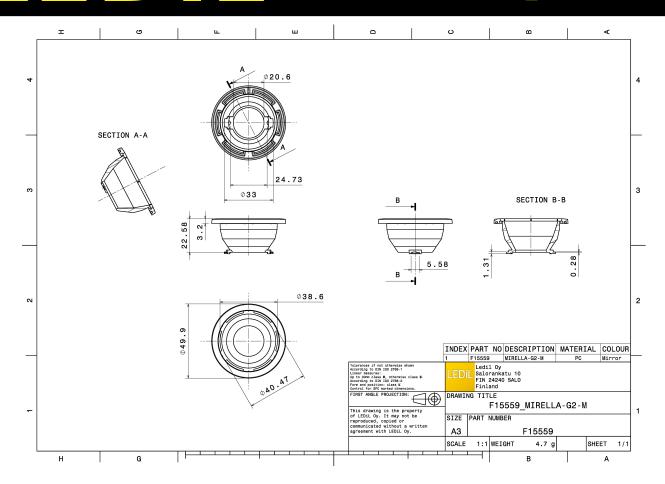


See also our general installation guide: www.ledil.com/installation_guide




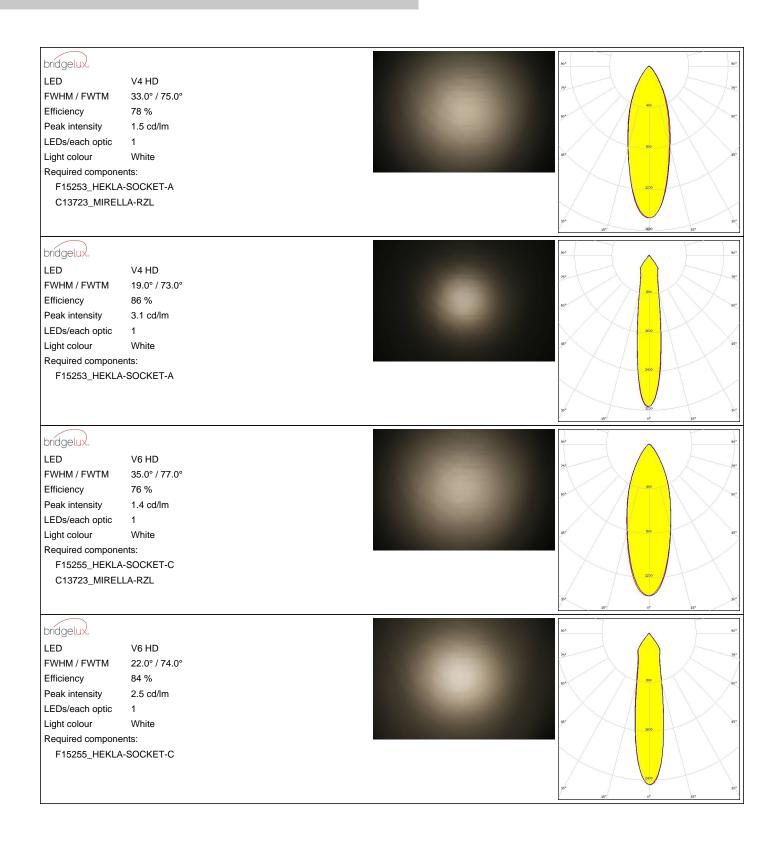




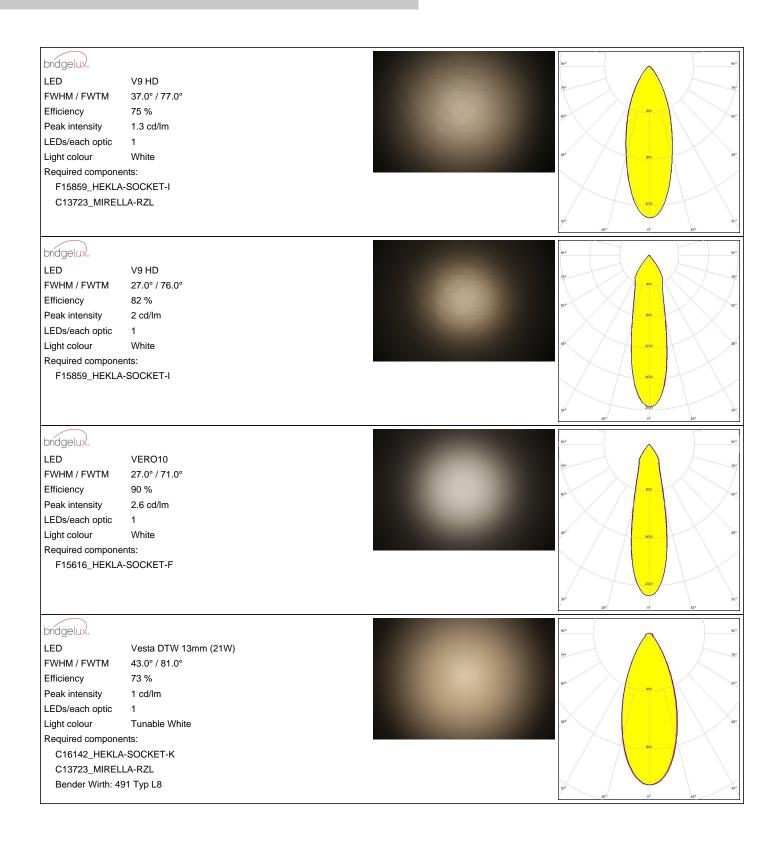



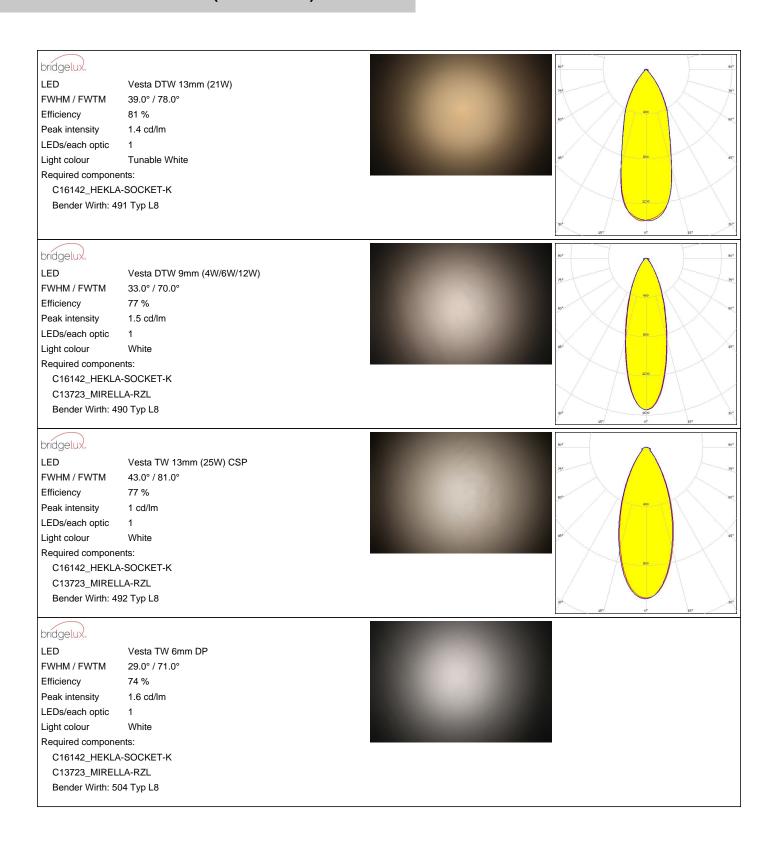



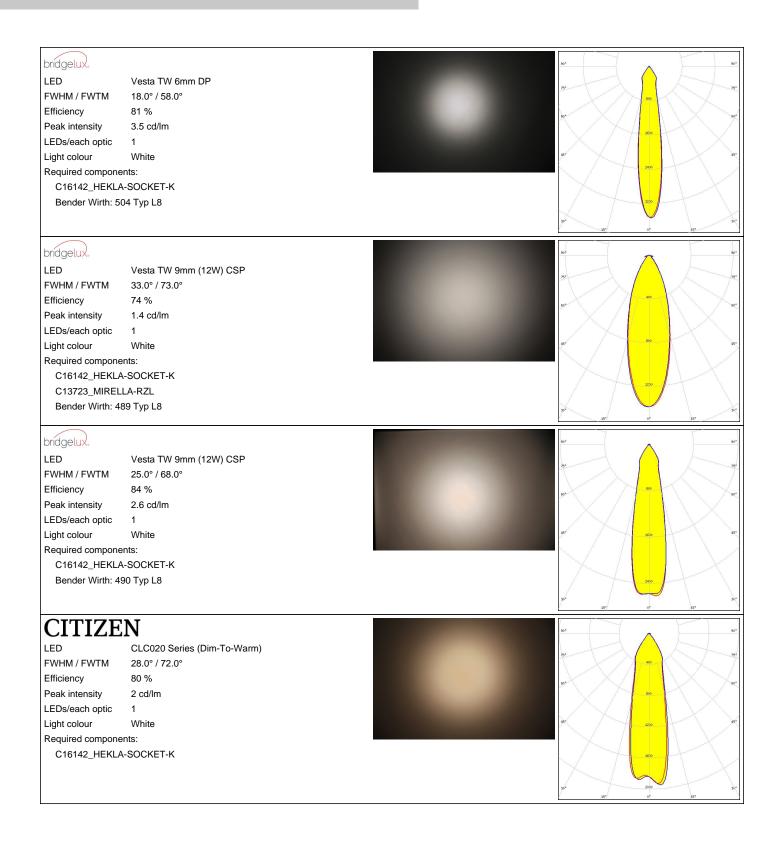

6/26




CITIZEN

CLC020 Series (Dim-To-Warm)

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 36.0° / 74.0° Efficiency 74 % Peak intensity 1.3 cd/lm LEDs/each optic Light colour White Required components:

C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 487 Typ L8

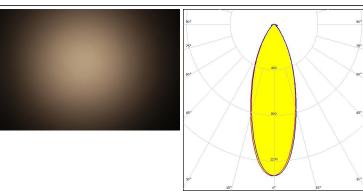


CITIZEN

LED CLU025/CLU027 (LES 6)

FWHM / FWTM 20.0° / 59.0° Efficiency 87 % Peak intensity 3.4 cd/lm LEDs/each optic 1 White Light colour Required components:

F15255_HEKLA-SOCKET-C

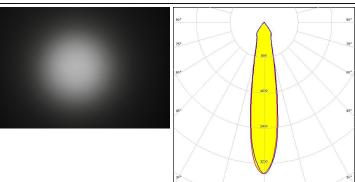


CITIZEN

LED CLU025/CLU027 (LES 6)

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 21.0° / 55.0° Efficiency 86 % Peak intensity 3.5 cd/lm LEDs/each optic Light colour White Required components:


F15255_HEKLA-SOCKET-C

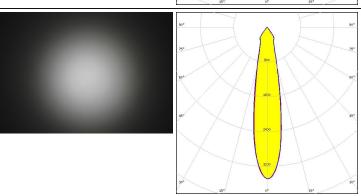

CITIZEN

CLU700/701/702 FWHM / FWTM 19.0° / 50.0° Efficiency 90 %

Peak intensity 4 cd/lm LEDs/each optic White Light colour Required components: F15255_HEKLA-SOCKET-C






CITIZEN CLU700/701/702 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 19.0° / 49.0° Efficiency 90 % Peak intensity 4 cd/lm LEDs/each optic Light colour White Required components: F15255_HEKLA-SOCKET-C **CITIZEN** LED CLU710/711 FWHM / FWTM 26.0° / 73.0° Efficiency 85 % Peak intensity 2.3 cd/lm LEDs/each optic 1 White Light colour Required components: F15859_HEKLA-SOCKET-I **CITIZEN** LED CLU7A2 (LES 4.2mm) FWHM / FWTM 16.0° / 49.0° Efficiency 87 % Peak intensity 4.2 cd/lm LEDs/each optic Light colour White Required components: F15255_HEKLA-SOCKET-C **CITIZEN** LCN-C01B (Tunable White) FWHM / FWTM 35.0° / 70.0° Efficiency 75 % Peak intensity 1.5 cd/lm LEDs/each optic White Light colour Required components:


C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 481 Typ L8

9/26




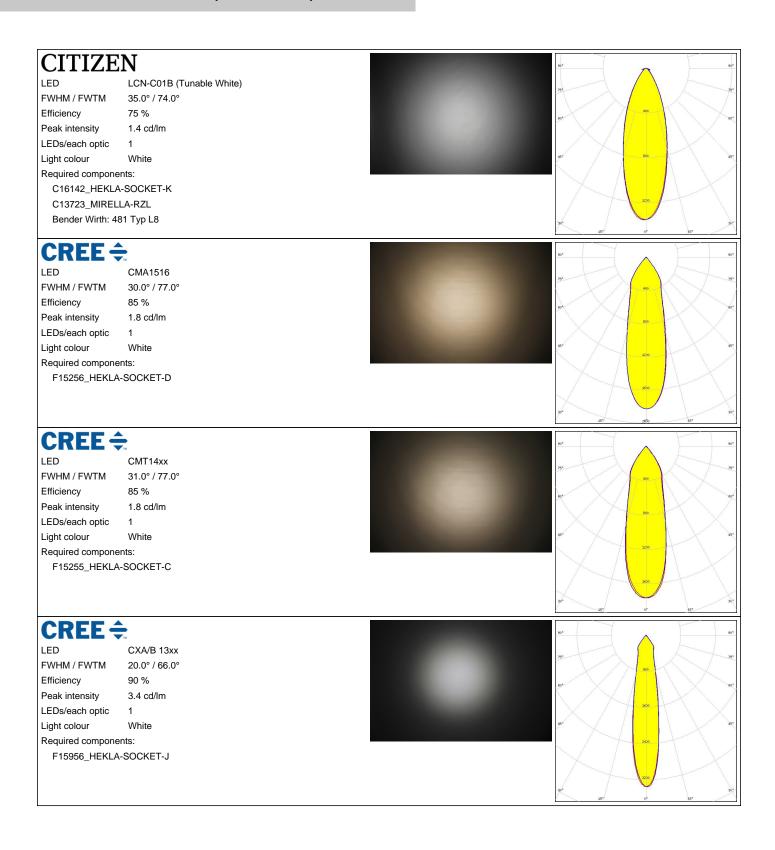




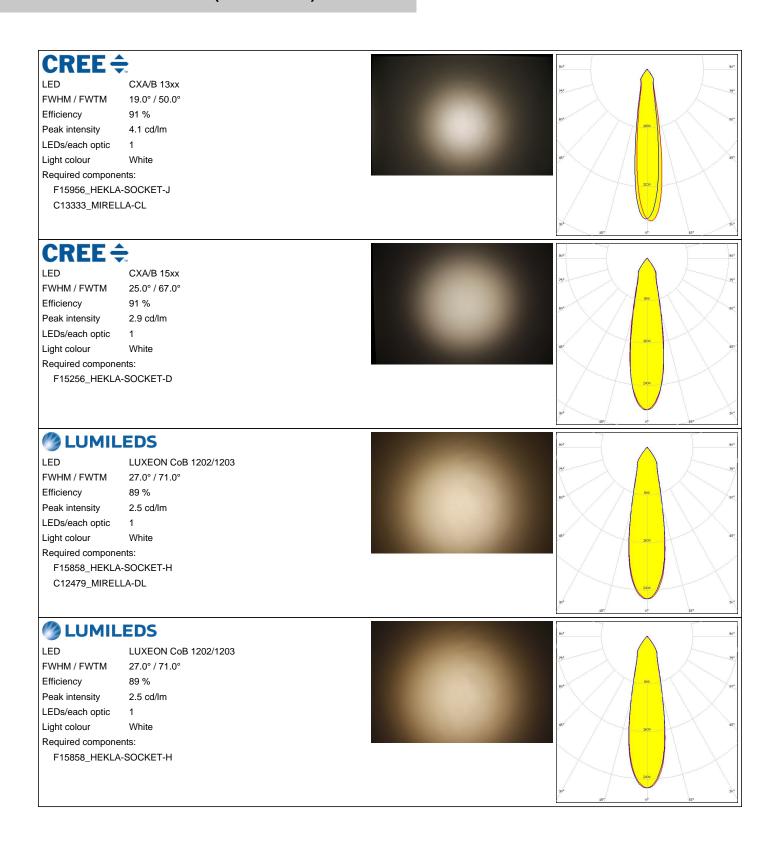




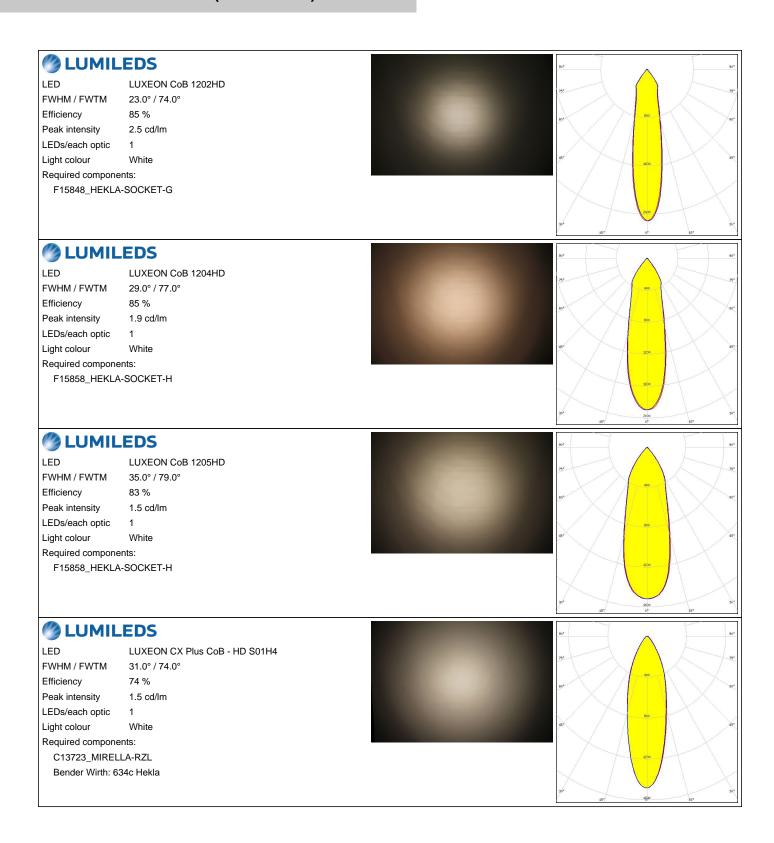




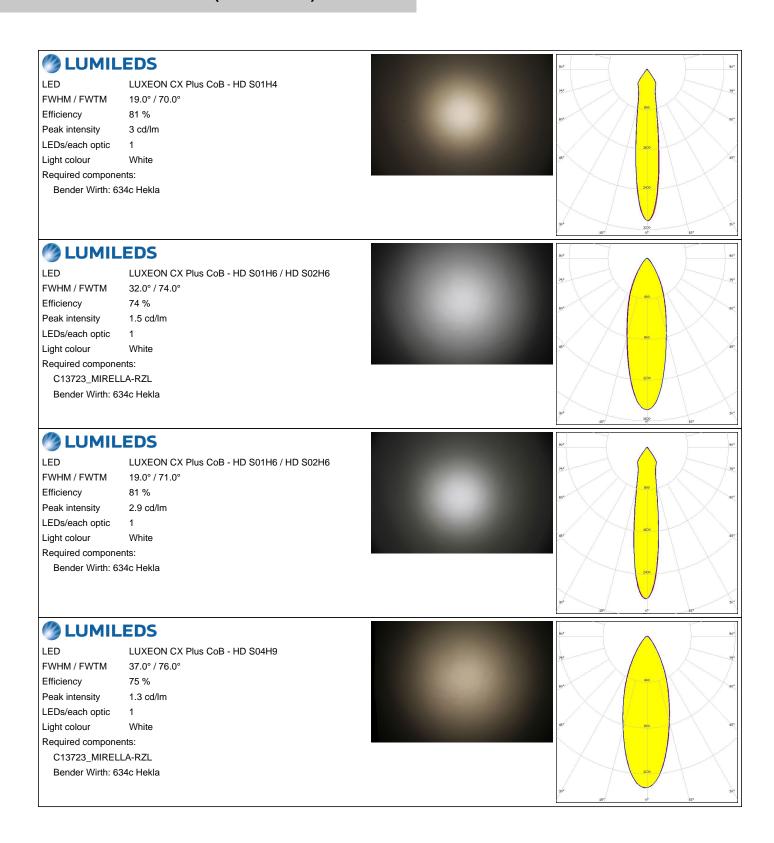




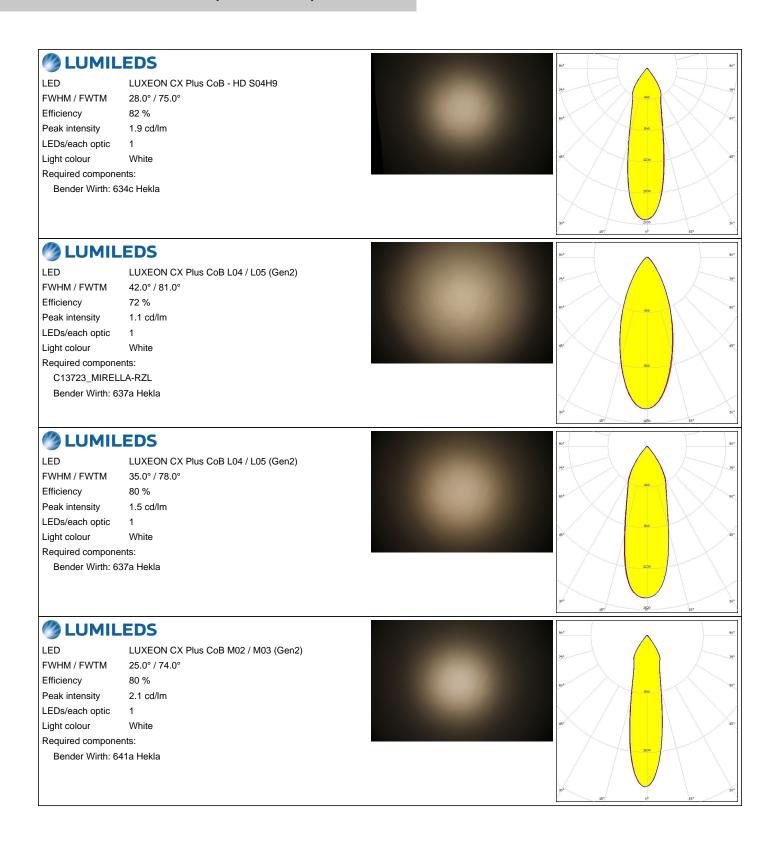




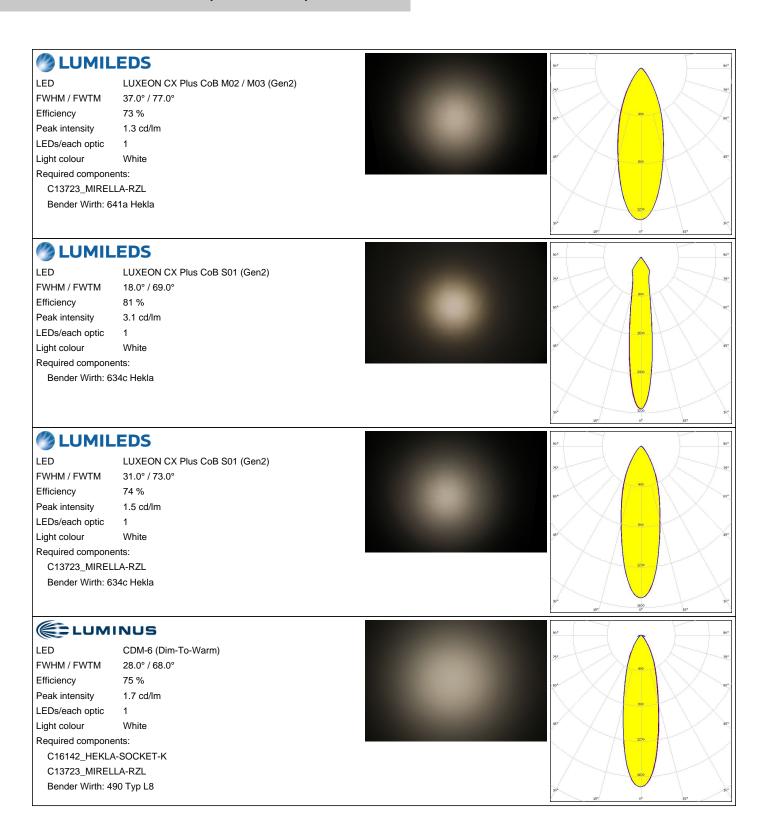




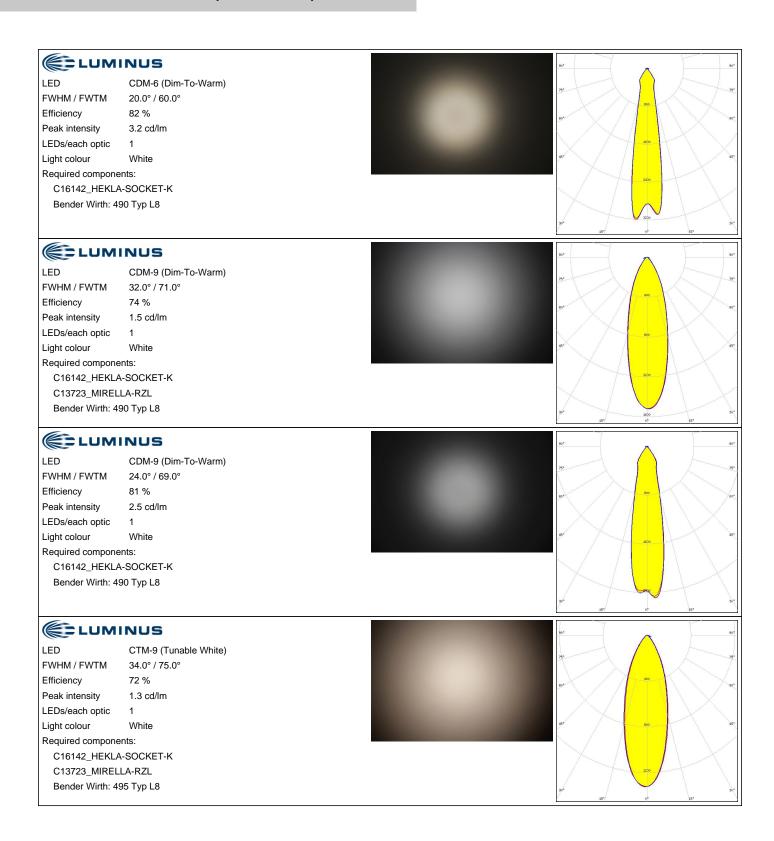



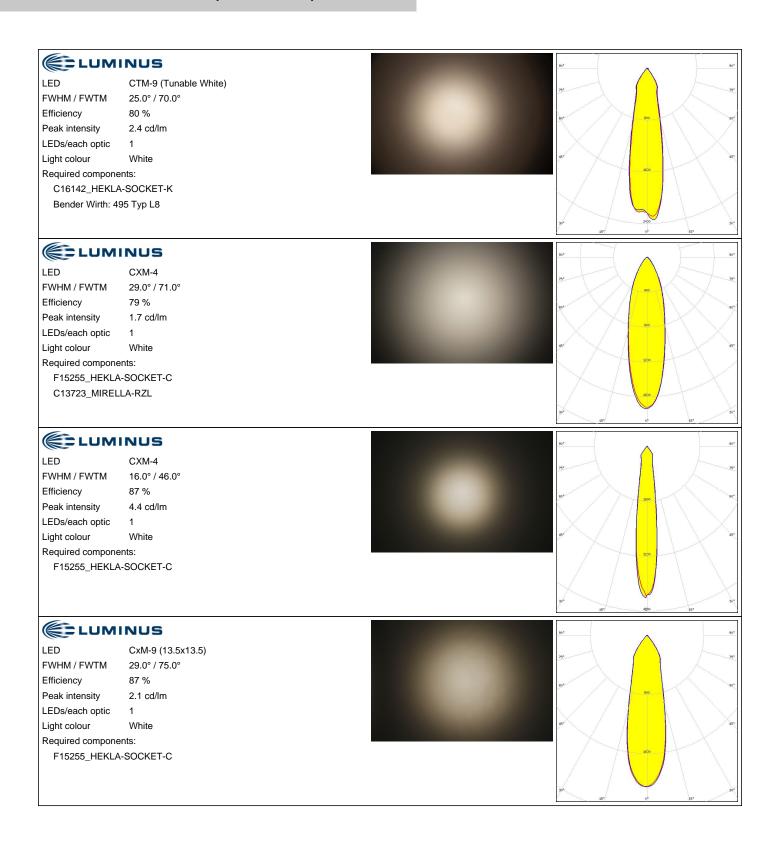



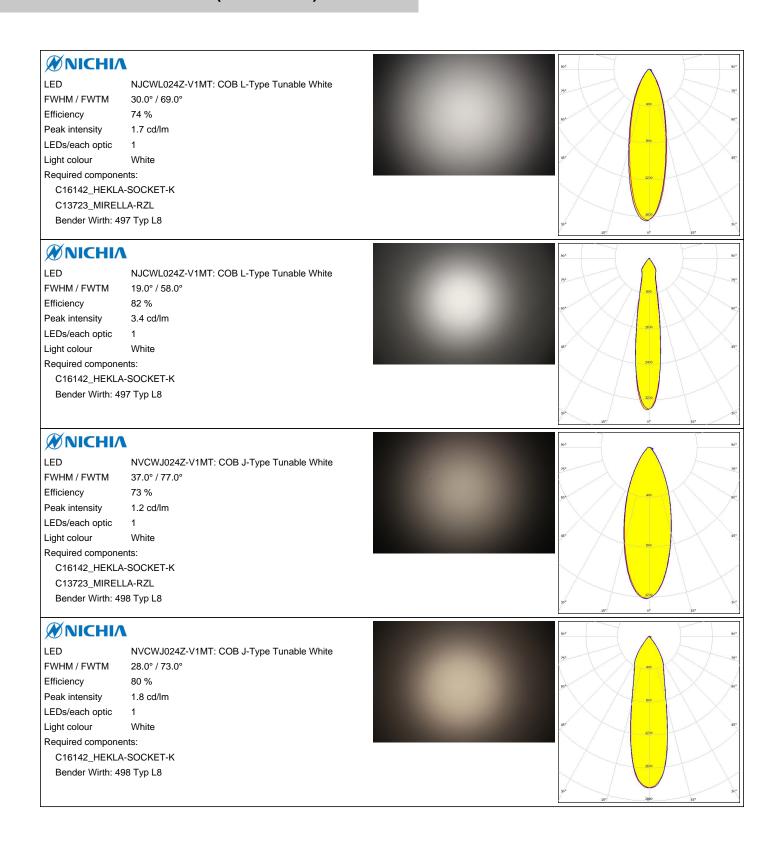



LEDs/each optic

Required components:

F15858_HEKLA-SOCKET-H

Light colour

White

OSRAM LED Soleriq S9 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 28.0° / 71.0° Efficiency 90 % Peak intensity 2.4 cd/lm LEDs/each optic Light colour White Required components: F15255_HEKLA-SOCKET-C **OSRAM** LED Soleriq S9 FWHM / FWTM 28.0° / 71.0° Efficiency 90 % Peak intensity 2.4 cd/lm LEDs/each optic 1 White Light colour Required components: F15255_HEKLA-SOCKET-C C13723_MIRELLA-RZL LED Fortimo SLM L09 CoB FWHM / FWTM 39.0° / 78.0° Efficiency 75 % Peak intensity 1.2 cd/lm LEDs/each optic Light colour White Required components: F15858_HEKLA-SOCKET-H C13723_MIRELLA-RZL LED Fortimo SLM L09 CoB FWHM / FWTM 29.0° / 77.0° Efficiency 83 % Peak intensity 1.8 cd/lm




PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 45.0° / 82.0°
Efficiency 71 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 432 Typ L8

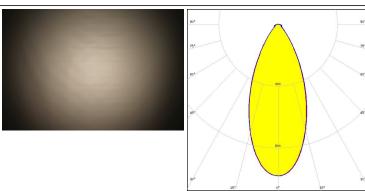

PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 40.0° / 80.0°


Efficiency 77 %

Peak intensity 1.2 cd/lm

LEDs/each optic 1

Light colour White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

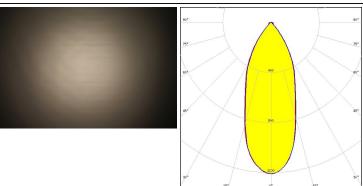

PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 40.0° / 80.0°
Efficiency 77 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8



PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 45.0° / 82.0°
Efficiency 71 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 432 Typ L8






SAMSUNG

LED LC010C G2
FWHM / FWTM 19.0° / 65.0°
Efficiency 86 %
Peak intensity 3.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C

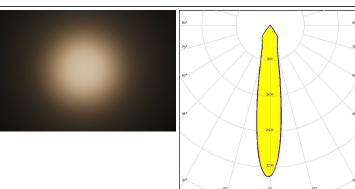

SAMSUNG

LED LC010T (Tunable White)

FWHM / FWTM 27.0° / 69.0°

Efficiency 76 %


Peak intensity 2 cd/lm

LEDs/each optic 1

Light colour White

Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 501 Typ L8

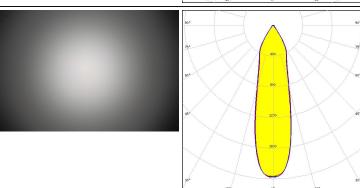


SAMSUNG

LED LC010T (Tunable White)

FWHM / FWTM 26.0° / 72.0°
Efficiency 81 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1

Light colour Tunable White

Required components: C16142_HEKLA-SOCKET-K

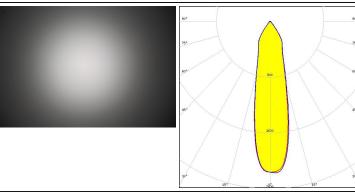


SAMSUNG

Bender Wirth: 501 Typ L8

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 44.0° / 82.0°
Efficiency 83 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I






SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 47.0° / 85.0°
Efficiency 74 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I C13723_MIRELLA-RZL

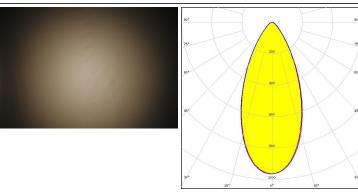


SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 47.0° / 79.0°
Efficiency 79 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C15570_LENA-STD-BASE2-VERO13-18

C13333_MIRELLA-CL

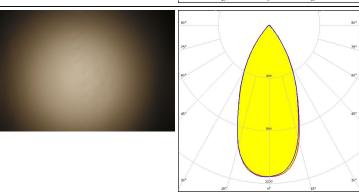


SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 47.0° / 81.0°
Efficiency 77 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:


F15859_HEKLA-SOCKET-I C12479_MIRELLA-DL

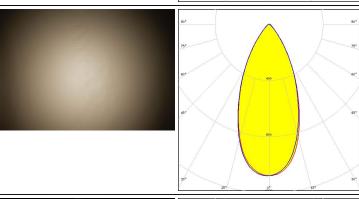


SAMSUNG

LED LC020C
FWHM / FWTM 25.0° / 73.0°
Efficiency 88 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour White


Required components: F15848_HEKLA-SOCKET-G

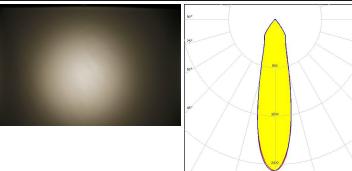




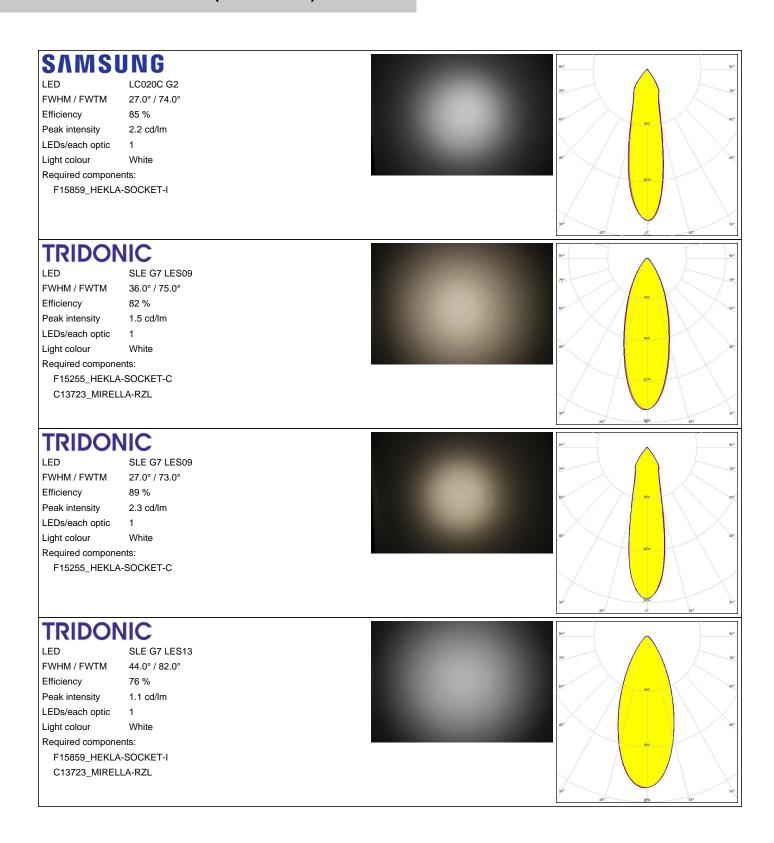



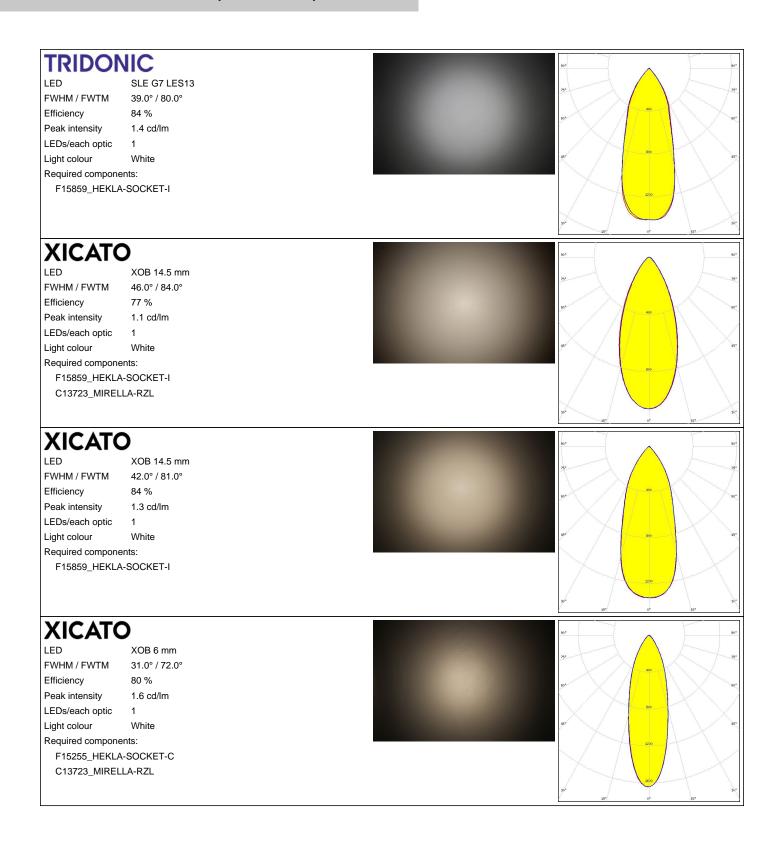



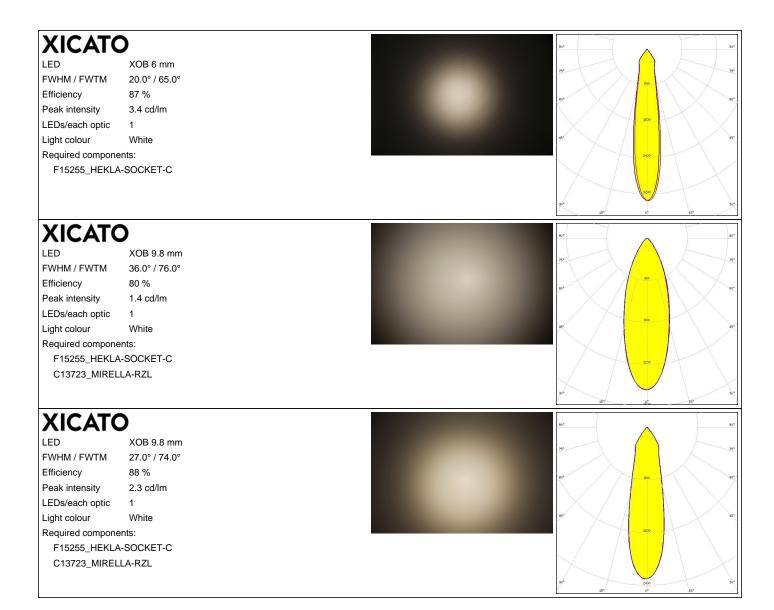



PHOTOMETRIC DATA (SIMULATED):


CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 27.3° / 65.3°
Efficiency 87 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C



LUMILEDS

 LED
 LUXEON M/MX


 FWHM / FWTM
 20.0° / 41.0°

 Efficiency
 89 %

Peak intensity 4.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C




WNICHIA

LED COB L-Type (LES 11)

FWHM / FWTM 32.0° / 71.0°
Efficiency 88 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15858_HEKLA-SOCKET-H




WNICHIA

LED COB T-Type
FWHM / FWTM 21.0° / 43.0°

Efficiency 88 %
Peak intensity 4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15848_HEKLA-SOCKET-G





PRODUCT DATASHEET F15559_MIRELLA-G2-M

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

26/26

www.ledil.com/ where_to_buy