



(1)

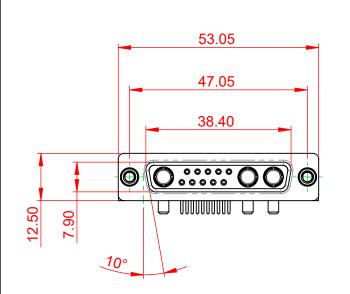



## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 20A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.

**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE:


.XX ±0.13

.XXX ±0.05

5000MΩ min. 1000V AC rms



				SW REFERENCE NO.: 630 COMBO ASSEMBLY				
COMBI	COMBINATION D-SUB		DRAWN: C.B			DATE: JAN. 01/2019		
			CHECKED:			DATE:		
	NC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)		SHEET 1 OF 2			
	DNTARIO SHALL NOT BE DA OR USED AS TH		DRAWING NUMBER: 630-13W			3640-2N6	ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE			PART NUM	/BER: 630-	13W3	3640-2N6	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

