



Keying Shown as example

S

F

В

CHARACTERISTICS

ယ

 \sim

-Mass


-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray

: 19.49 g ± 10%

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 23.01 R1 20.62 R2 S 28.6±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ VV THREAD M18x1-6g

Е

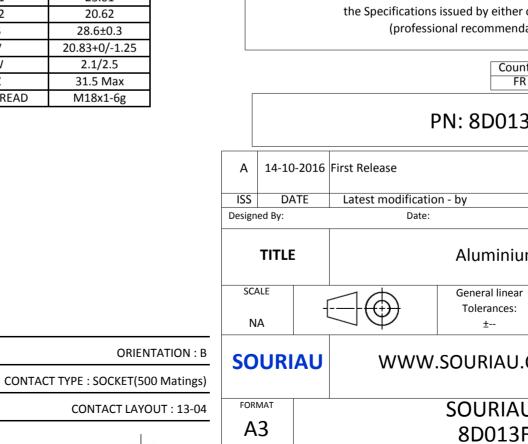

D

BASIC SERIES: 8D 0 13 04 F SHELL TYPE : Square Flange Receptacle CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13 PLATING : F = Nickel

G

Н

C B >								
						4		
LAY	YOUT SHOWN AS EXA	MPLE				3		
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed								
PN: 8D013F04SB								
Latest modificatio	n - by				MOD N°			
Date:	<i>.</i>		CUSTOMER	DRAWING				
Aluminium Receptacle 8D series								
$] \bigoplus$	General linear Tolerances: ±	NPRDS / PROJECT 859						
Image: Source of the second state o								
SOURIAU DRG N° 8D013F04SB-C					SHEET			
С		B		A		J		

ſ	工	۵	וד-	m	D		0	
		Contact Layout						Panel Cutou
4		$ \begin{array}{c} $				SQUARE	E FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
		ID (mm) (mm) +.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) 083 (2.11) 146 (3.71) +.035 (0.89)						
ω							¢	Dim ØA ØAA R1 ØT
							SOURIAU shall not b due to a use of th the Specifications issu (professional	he Products whi
N							PN	Country FR : 8D013F
					A ISS Designed		rst Release Latest modification - b Date:	оу Эу
					SCAL			Aluminium General linear
_					NA SOL	JRIAU	www.sc	Tolerances: ±
					FORMA A3			OURIAU 8D013F0
_	Н	G	F	E	D		С	

