


R76II347050H3J

Aliases (76II347050H3J)

R76H, Film, Double Metallized Polypropylene, Automotive Grade, 0.47 uF, 5%, 250 VDC, 105°C, Lead Spacing = 15mm

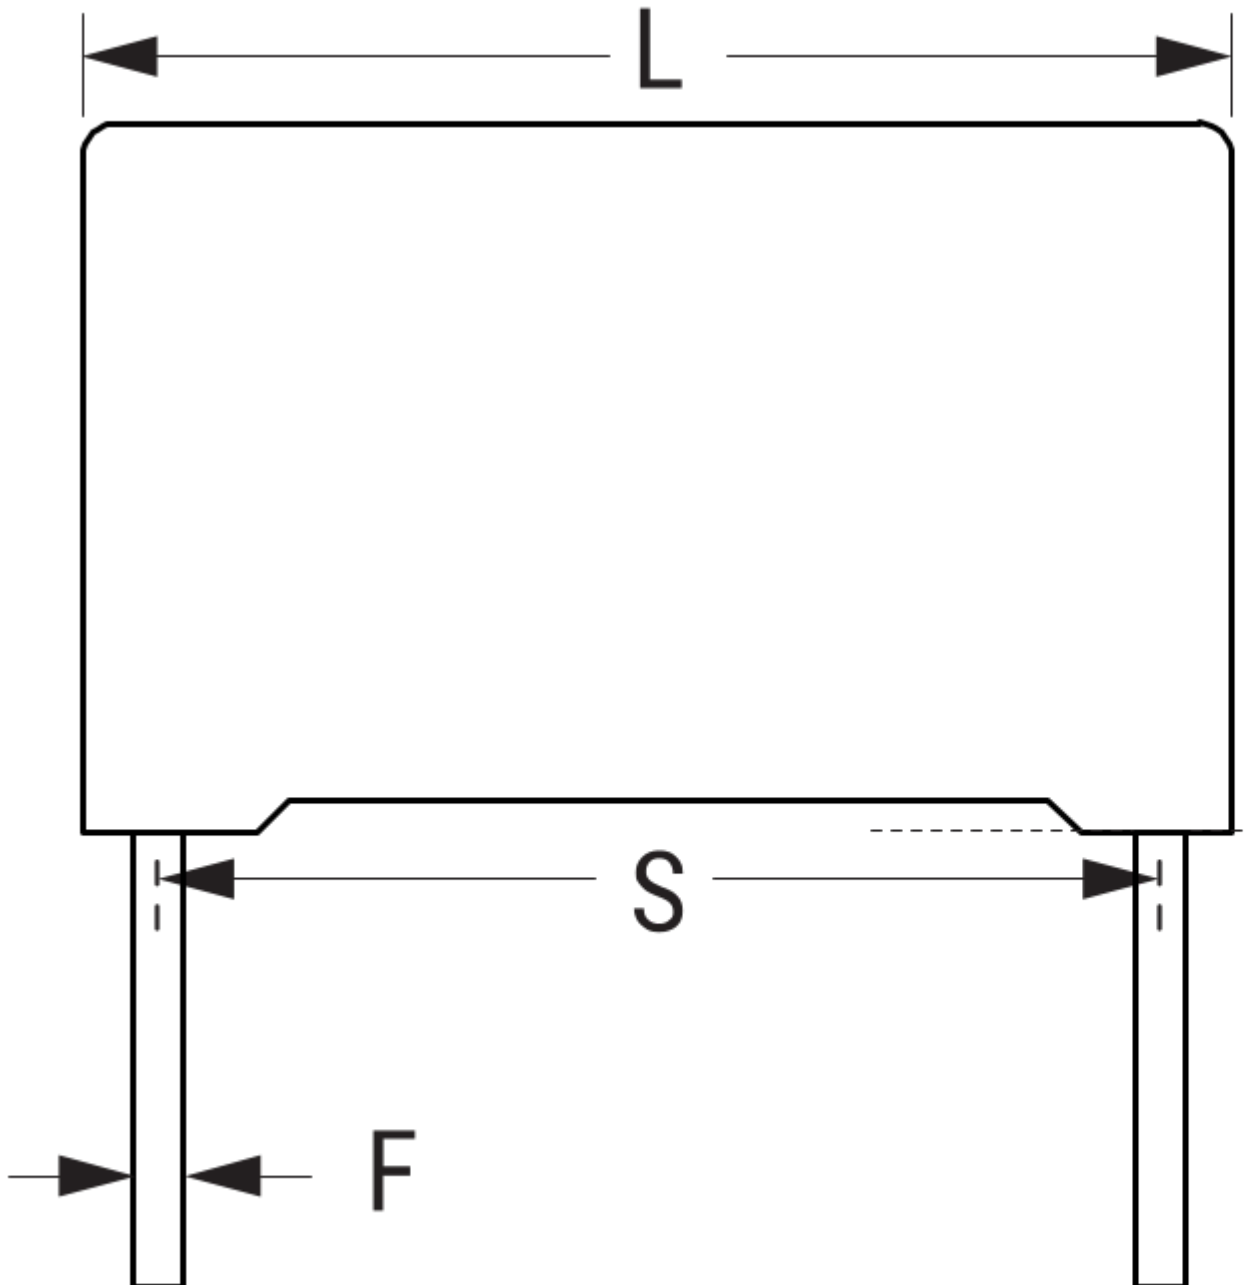

Click [here](#) for the 3D model.

Dimensions

L 18mm +/-0.5mm

H 19mm +0.1/-0.5mm

Dimensions

T 11mm +0.2/-0.5mm
S 15mm +/-0.4mm
LL 25mm +2/-1mm
F 0.8mm +/-0.05mm

Packaging Specifications

Packaging Bulk, Bag
Packaging Quantity 350

General Information

Series R76H
Dielectric Double Metallized Polypropylene
Style Radial
Features Automotive Grade, Pulse
RoHS Yes
Lead Wire Leads
Qualifications AEC-Q200
AEC-Q200 Yes
THB Performance Yes
Component Weight 5.1 g

Specifications

Capacitance 0.47 uF
Capacitance Tolerance 5%
Voltage AC 180 VAC
Voltage DC 250 VDC
Temperature Range -55/+125°C
Rated Temperature 105°C
Dissipation Factor 0.03% 1kHz, 0.06% 10kHz
Insulation Resistance 63.83 GOhms
Max dV/dt 550 V/us
Resistance 3.39 mOhms (100kHz)
Ripple Current 10.62 Amps (100kHz 100C), 259 Amps (Peak)
Inductance 10 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - cae4b909-36d1-4c05-bd3e-38efeb14e6dc
© 2006 - 2023 KEMET
Generated 5/18/2023 - cae4b909-36d1-4c05-bd3e-38efeb14e6dc
© 2006 - 2023 KEMET