

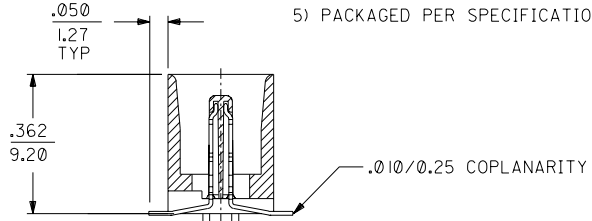


NOTE FOR LEAD FREE CONVERSION:  
 THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.


- NOTES:
- 1) MATERIALS:  
 HOUSING: I.R. COMPATIBLE POLYMER, GLASS FILLED, UL 94 V 0, BLACK  
 TERMINALS: BRASS  
 BOARDLOCK: PHOSPHOR BRONZE
  - 2) PLATING:  
 .000030/(0.00076) MINIMUM GOLD IN CONTACT AREA AND .000050/(0.00127) MINIMUM TIN IN TAIL AREA OVER .000075/(0.00191) MINIMUM NICKEL UNDERPLATING OVERALL.
  - 3) ASSEMBLY MATES WITH MOLEX P/N SDA-71660-\*\*\*\*, CONFORMS TO PRODUCT SPECIFICATION PS-71660.
  - 4) FOUR DIGIT DATE CODE (WK, YR), EXAMPLE => 26 96 LOCATED IN AREA INDICATED.
  - 5) PACKAGED PER SPECIFICATION PK-70873-055.

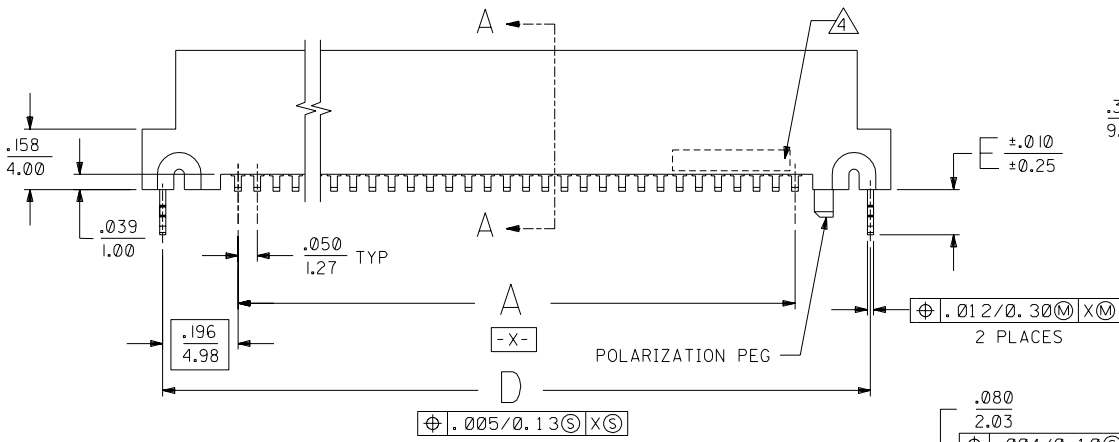

SECTION A-A  
 SCALE 4:1



60 CIRCUIT ASSEMBLY SHOWN  
 SCALE = 2:1

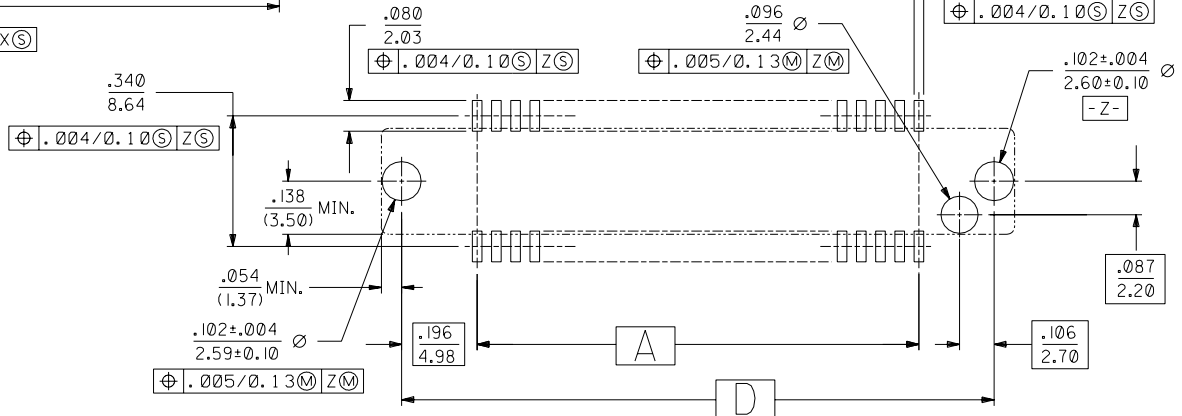

J	LEAD FREE CONV ECN UCP2004-2096 RKADAMS 04/04/23
I	CHANGE PK SPEC ECN UCP2004-0922 RWHITE 03/11/11
H	ADD -5069 & -5100 ECN UCP2003-1596 RWHITE 03/02/06
G	REV PACKAGING ECN UDT2000-1183 ACHAMMER 00/05/30
F	REVISED PER ECN UDT1999-1036 KSMITH 99/05/26
E	REVISED PER ECN U71132 RESENDEZ 97/3/21
D2	REVISED PER ECN U70871 ACHAMMER 97/2/3
D1	REVISED PER ECN U70444 ACHAMMER 96/10/17
D	REVISED PER ECN U60641 11-28-95 DRS
C	REVISED PER ECN U50830 2-24-95 RAN
B	REVISED PER ECN U40901 7-20-94 RAN
A	INITIAL RELEASE PER ECN U40378 3-18-94 RAN

71661-5100	100	.062±.006 (1.57±0.15)	2.450 (62.23)	2.676 (67.97)	2.949 (74.90)	2.842 (72.19)	.118 (3.00)
71661-5080	80	.062±.006 (1.57±0.15)	1.950 (49.53)	2.176 (55.27)	2.449 (62.20)	2.342 (59.50)	.118 (3.00)
71661-5069	68	.116±.006 (2.95±0.15)	1.650 (41.91)	1.875 (47.65)	2.149 (54.58)	2.042 (51.88)	.172 (4.37)
71661-5068	68	.062±.006 (1.57±0.15)	1.650 (41.91)	1.875 (47.65)	2.149 (54.58)	2.042 (51.88)	.118 (3.00)
71661-5060	60	.062±.006 (1.57±0.15)	1.450 (36.83)	1.676 (42.57)	1.949 (49.50)	1.842 (46.80)	.118 (3.00)
71661-5050	50	.062±.006 (1.57±0.15)	1.200 (30.48)	1.426 (36.22)	1.699 (43.15)	1.592 (40.45)	.118 (3.00)
71661-5040	40	.062±.006 (1.57±0.15)	.950 (24.13)	1.176 (29.87)	1.449 (36.80)	1.342 (34.10)	.118 (3.00)
71661-5031	30	.116±.006 (2.95±0.15)	.700 (17.78)	.925 (23.52)	1.199 (30.45)	1.092 (27.75)	.172 (4.37)
71661-5030	30	.062±.006 (1.57±0.15)	.700 (17.78)	.925 (23.52)	1.199 (30.45)	1.092 (27.75)	.118 (3.00)

ITEM NUMBER	CIRCUIT SIZE	RECOMMENDED CIRCUIT BOARD THICKNESS	A	B	C	D	E
-------------	--------------	-------------------------------------	---	---	---	---	---

DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

INCH METRIC

3 PLACE ± .005 ---

2 PLACE ± --- ± 0.13

1 PLACE --- ± ---

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRWG. BY: RAN CHK'D. BY: RAN

APP'D. BY: CAB SCALE: 4:1

FILE NAME: 5716615030

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISIONS

SALES ASSEMBLY  
 MOLEX EBB1 50D SMT  
 PLUG CONNECTOR

MOLEX INCORPORATED  
 LISLE, ILL. 60532 U.S.A.

SHEET NO. 1 OF 1 DATE 2/1/93

PART NO. SDA-71661-5\*\*\*

DRWG. NO. SDA-71661-5\*\*\*

DIV. C