
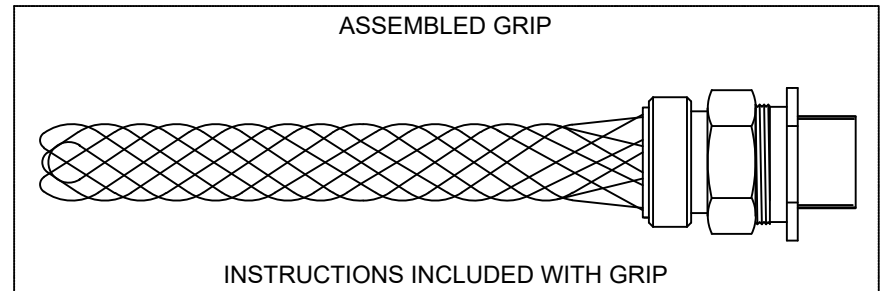


CATALOG NUMBER	MATERIAL NUMBER	CONDUIT SIZE	N.P.T. FITTING SIZE	LENGTH "M"	DIAMETER "A" REF.	LENGTH "B" REF.	LENGTH "C" REF.	PRODUCT SELECTION NUMBER	UL LISTED	CSA APRVD
36441	-----	3/8"	1/2"	3.875±0.500 / 98.43±12.70	1.0 / 25	1.13 / 28.7	0.44 / 11.2	STB038FP	Y	Y
36380	1300960041	1/2"	1/2"	4.625±0.500 / 117.48±12.70	1.2 / 30	1.25 / 31.8	0.44 / 11.2	STB050FP	E	E
36382	1300960043	1"	1"	7.000±0.500 / 177.80±12.70	1.7 / 43	1.81 / 45.9	0.69 / 17.5	STB100FP	S	S

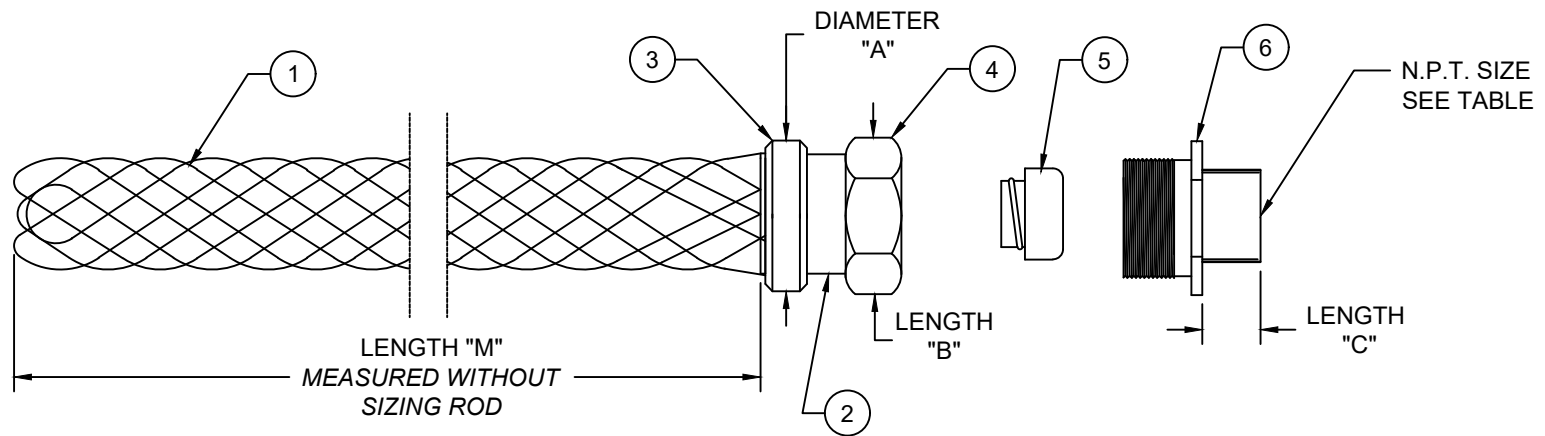

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	STAINLESS STEEL
2	INNER RING	ZINC PLATED STEEL
3	OUTER RING	ALUMINUM
4	COMPRESSION NUT	ZINC PLATED STEEL OR MALLEABLE IRON
5	FERRULE	ZINC PLATED STEEL OR ALUMINUM
6	THREADED BODY	ZINC PLATED STEEL OR MALLEABLE IRON

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER AS PER PCN#510808						
DIVISIONAL SYMBOLS	INCH/MM		NTS		EC NO: 736640 DRWN: SUGEEB 2022/12/21 CHK'D: LIKTV 2023/02/14 APPR: GGA 2023/02/16 INITIAL REVISION: DRWN: HRUIZ01 2014/09/23 APPR: JFMURPHY 2015/04/27						
	GENERAL TOLERANCES (UNLESS SPECIFIED)										
		mm	INCH								
		4 PLACES	± ----	± ----							
		3 PLACES	± ----	± 0.005							
		2 PLACES	± 0.13	± 0.01							
		1 PLACE	± 0.25	± 0.02							
		0 PLACES	± ----	± ----							
		ANGULAR TOL ± 0.5 °									
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
							A-SIZE	130096	SEE TABLE	GENERAL MARKET	1 OF 1

molex

STRAIN RELIEF
LIQUID TIGHT CONDUIT STRAIGHT-FEMALE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-130096-103	PSD	001	A1