
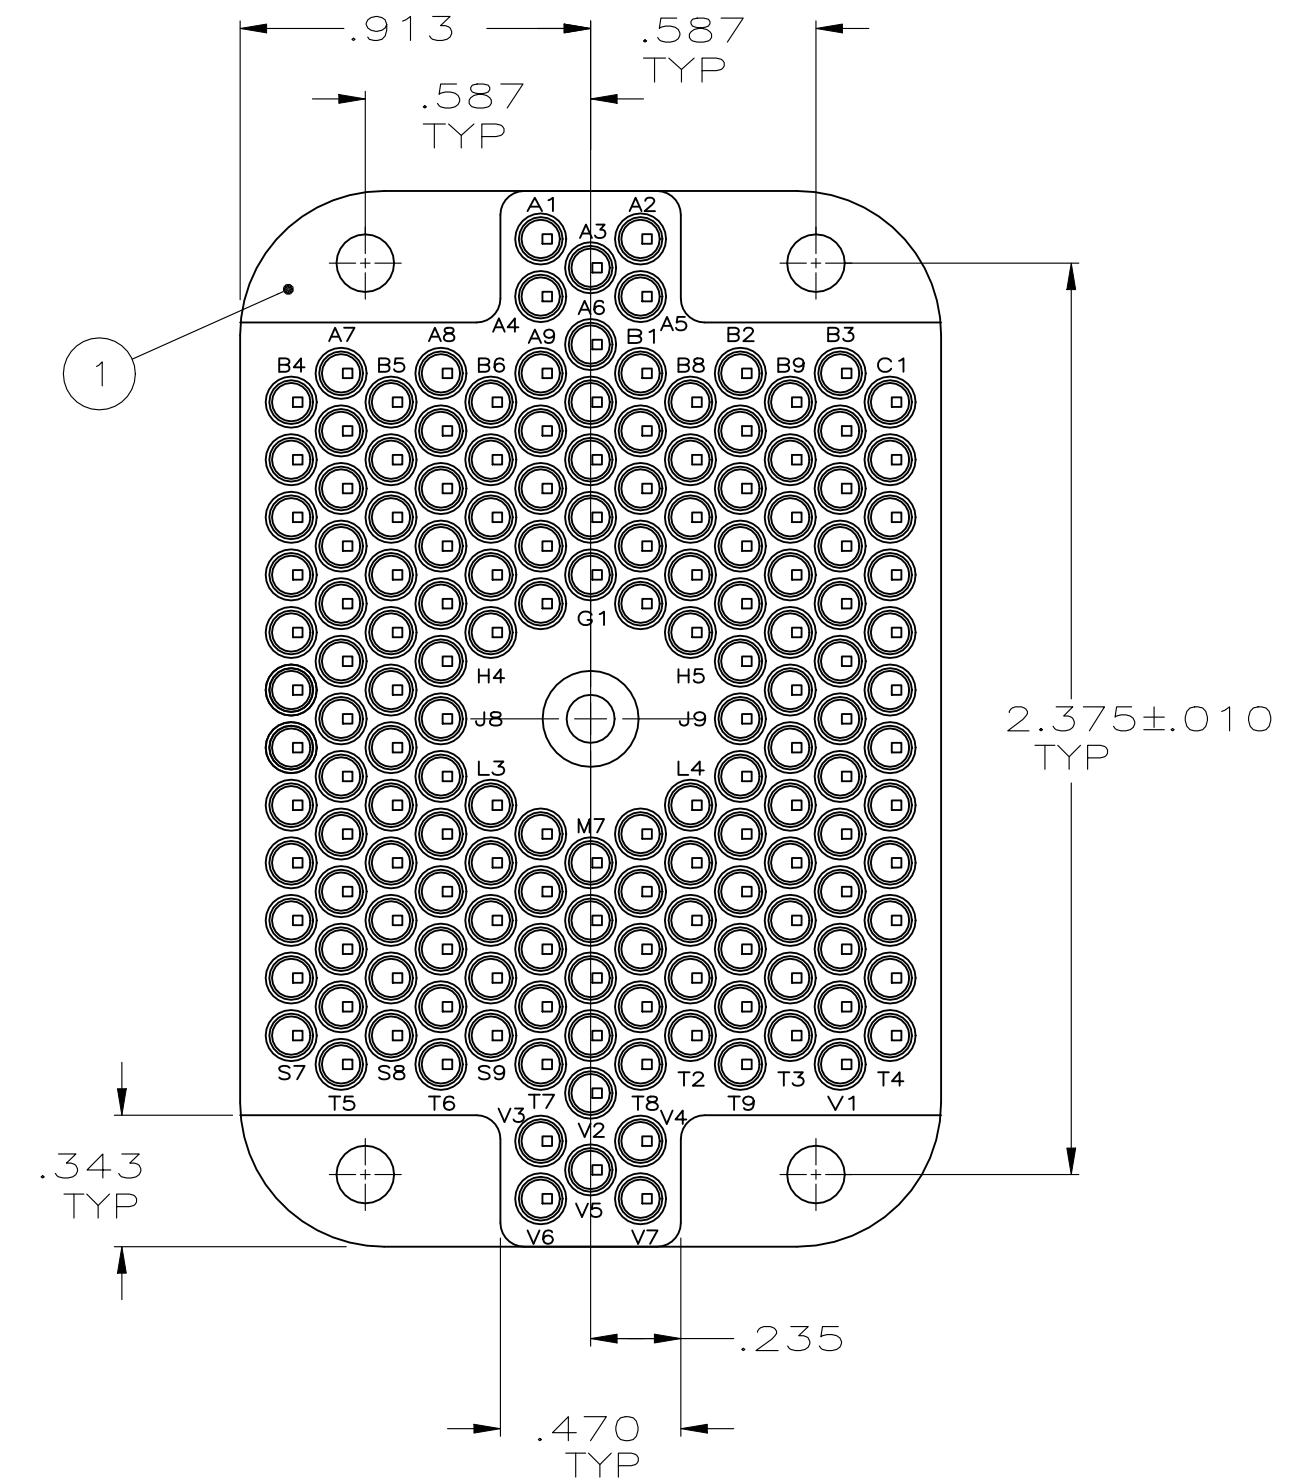
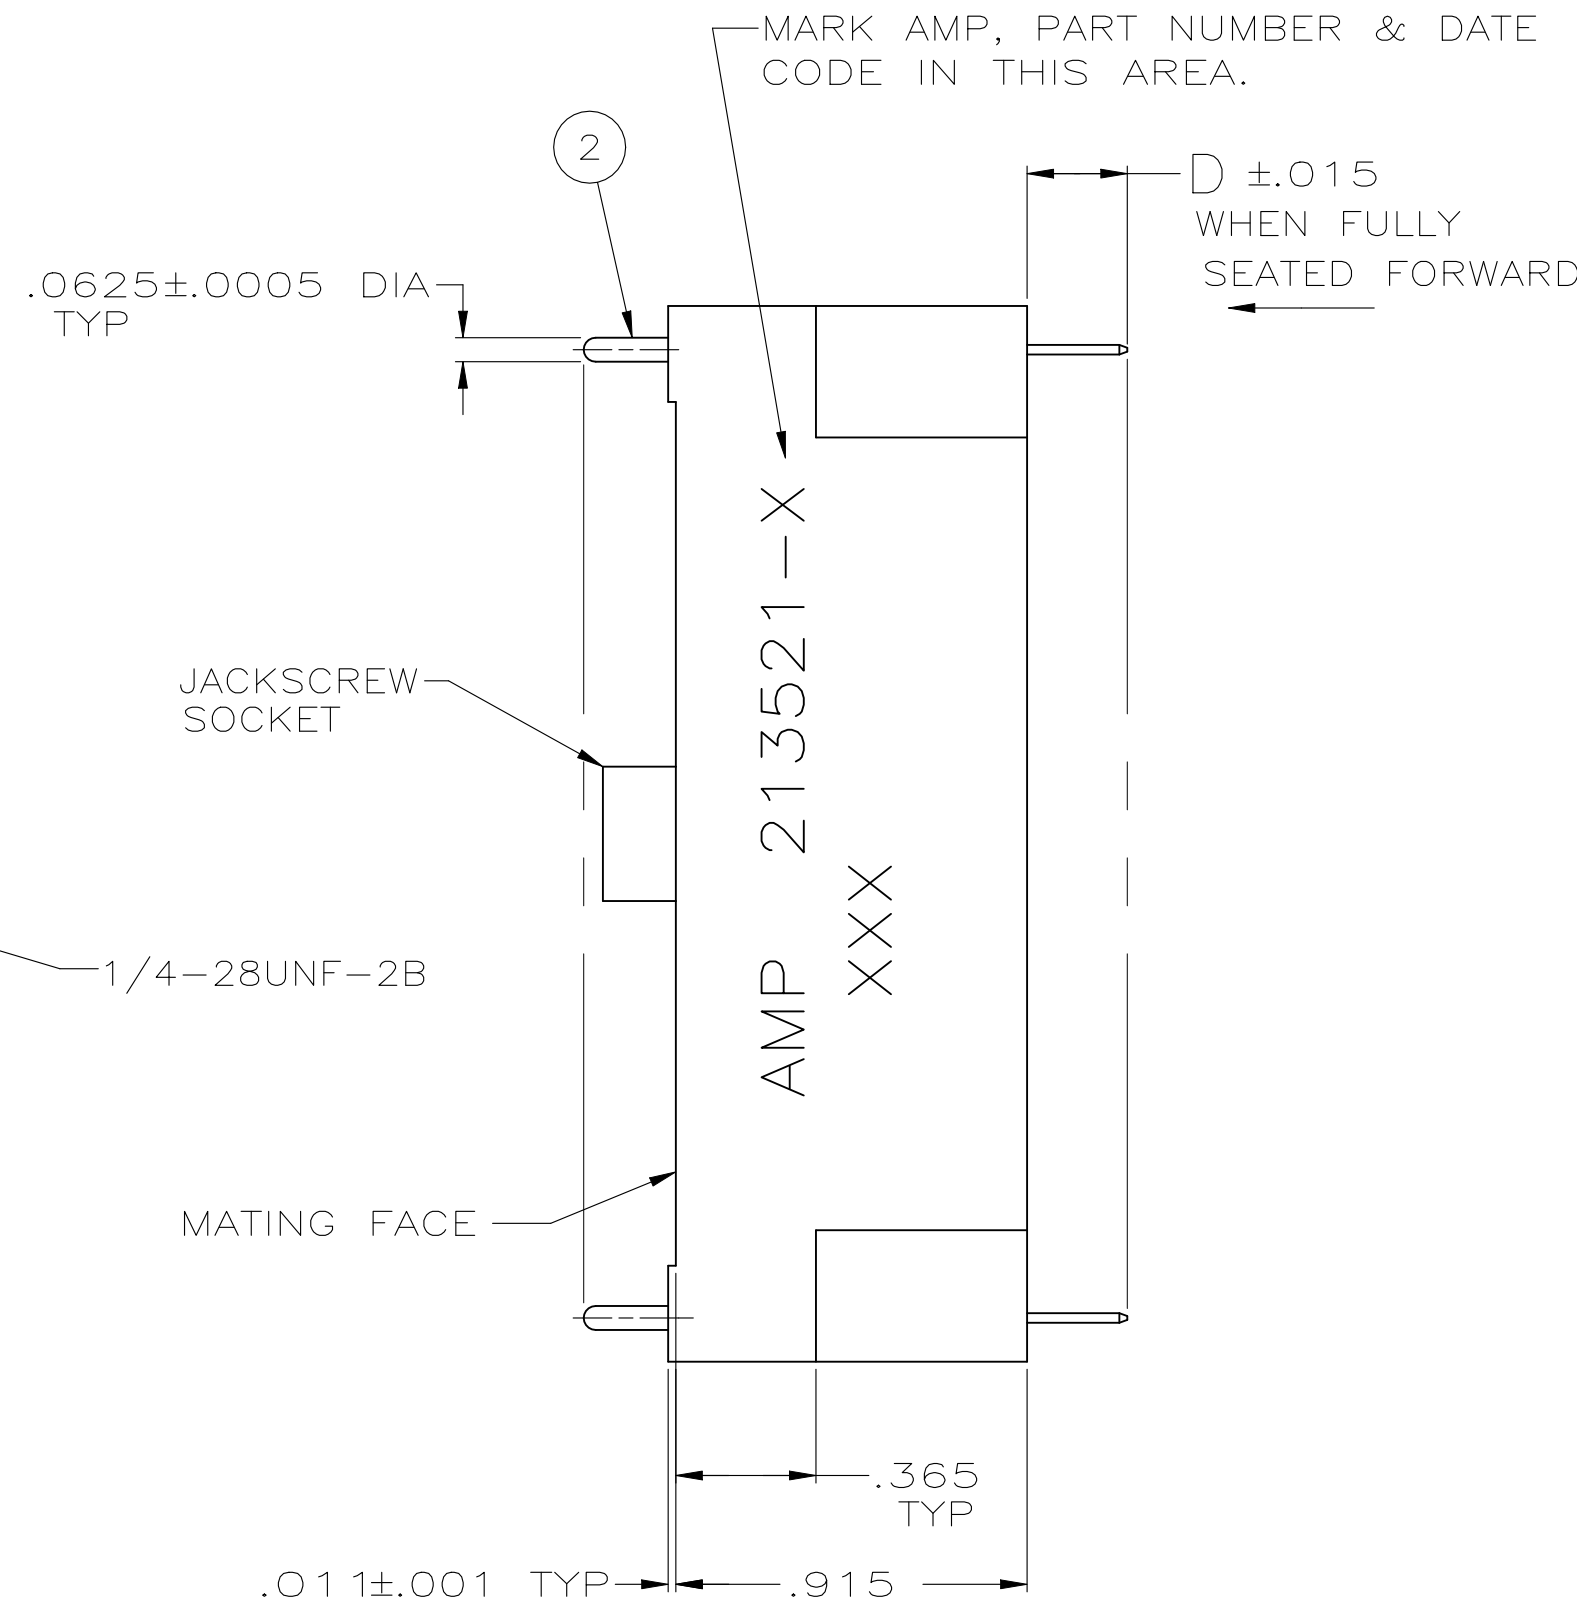


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
K2		REVISED PER ECR-22-144105	29JUN2022	RK	MZ

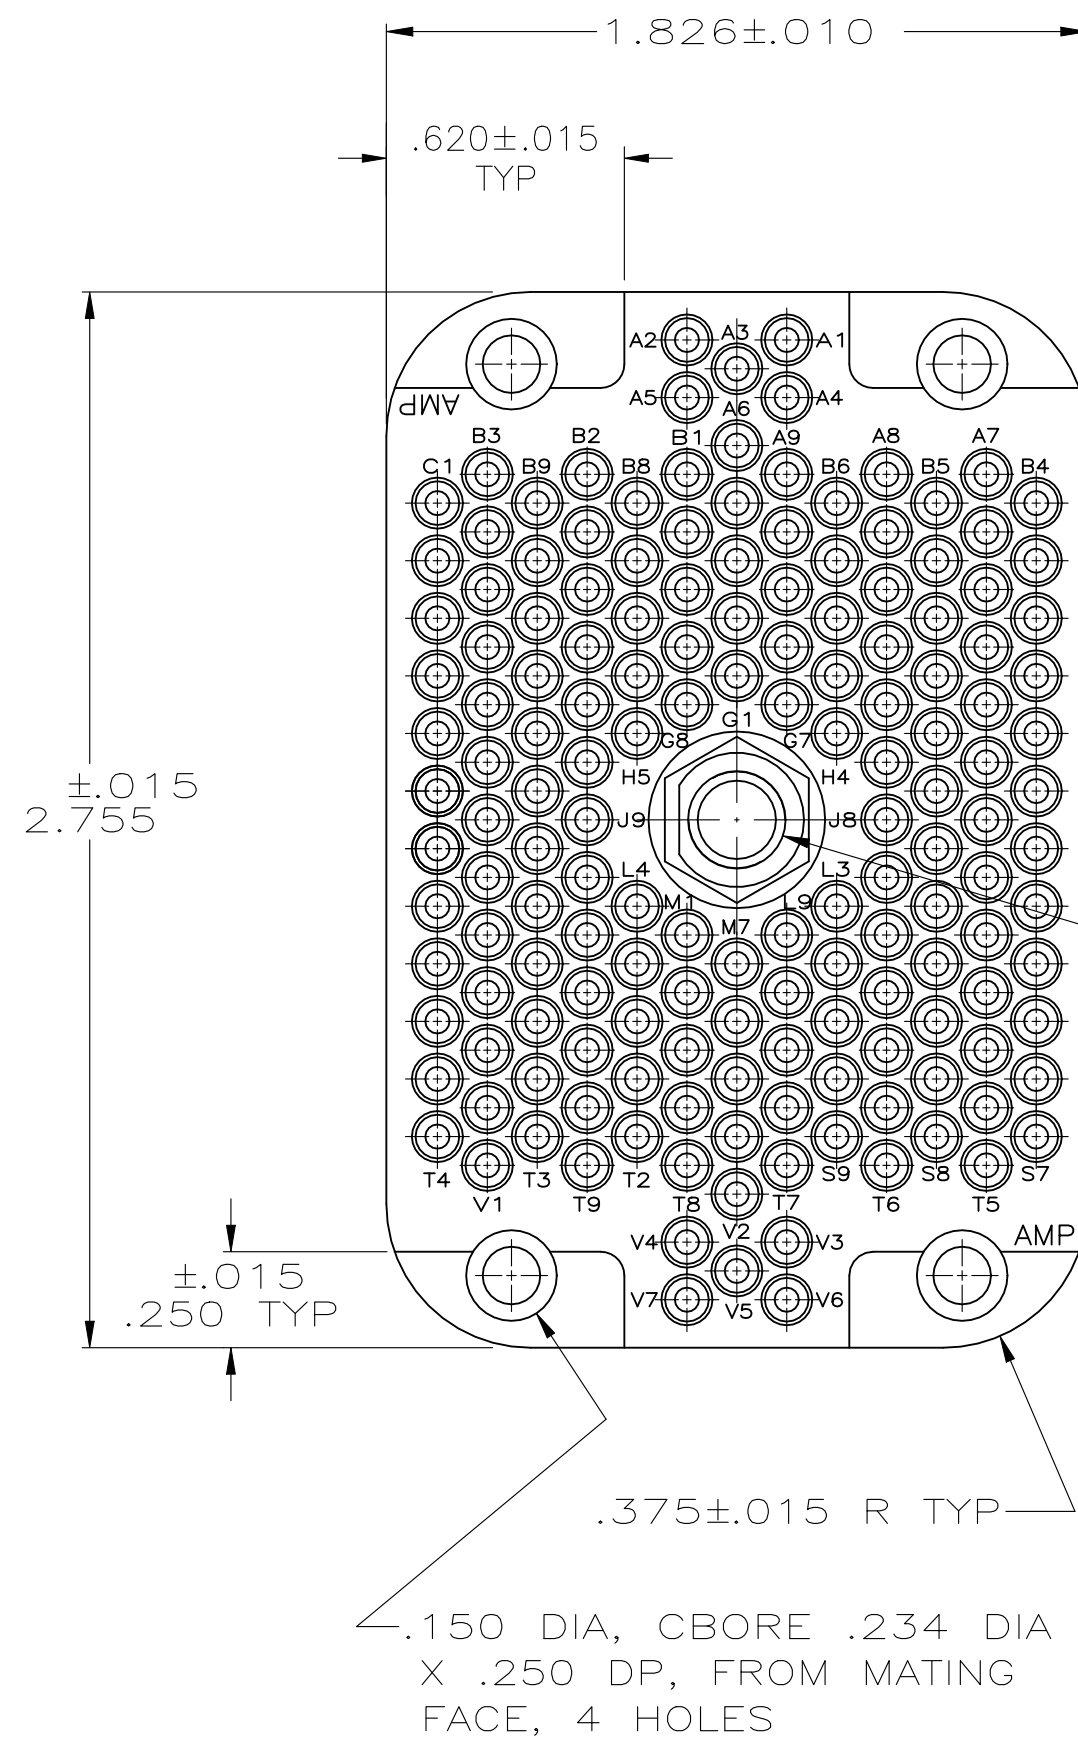

1 THIS ASSEMBLY MATES WITH 202799.

2 .000030 MIN GOLD PLATE ON .0625 DIA .250 FROM MATING END & REMAINDER GOLD FLASH ALL OVER .000050 MIN NICKEL. POSTS PLATED TIN-LEAD .000100 MIN THICK PER MIL-T-10727 OVER NICKEL .000050 MIN THK PER QQ-N-290.

3 JACKSCREW SOCKET: STAINLESS STEEL; PIN CONTACT: BRASS; RECEPTACLE BLOCK: BLUE = DIALYL PHTHALATE; BLACK = PHENOLIC.

4 .000030 MIN GOLD PLATE ON .0625 DIA .250 FROM MATING END & REMAINDER GOLD FLASH ALL OVER .000050 MIN NICKEL. POSTS PLATED TIN .000100 MIN THICK PER MIL-T-10727 OVER NICKEL .000050 MIN THK PER QQ-N-290.

SUPERSEDED BY 213521-1	4	.261	6-66460-2	202800-3	BLUE	213521-6
	—	.261	66460-7	202800-3	BLUE	213521-5
	OBSOLETE	.659	66460-9	202800-4	BLACK	213521-4
	OBSOLETE	.470	66460-8	202800-4	BLACK	213521-3
OBSOLETE	—	.261	66460-7	202800-4	BLACK	213521-2
	2	.261	66460-7	202800-3	BLUE	213521-1
FINISH	D	2	PIN CONTACT QTY = 160	1	BLOCK RECEPTACLE QTY = 1	COLOR PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ERDMAN 4-29-88	TE Connectivity	
DIMENSIONS: INCHES		CHK R. STONE 4-29-88	RECEPTACLE ASSEMBLY, 160 POSITION, POSTED, M SERIES	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —	SIZE A2	CAGE CODE 00779
0 PLC ± -		PRODUCT SPEC —	DRAWING NO C=213521	RESTRICTED TO —
1 PLC ± -		APPLICATION SPEC —	SCALE 2:1	SHEET 1 of 1
2 PLC ± -		WEIGHT —	REV K2	
3 PLC ± .005		CUSTOMER DRAWING		
4 PLC ± -				
ANGLES ± -				
FINISH				