

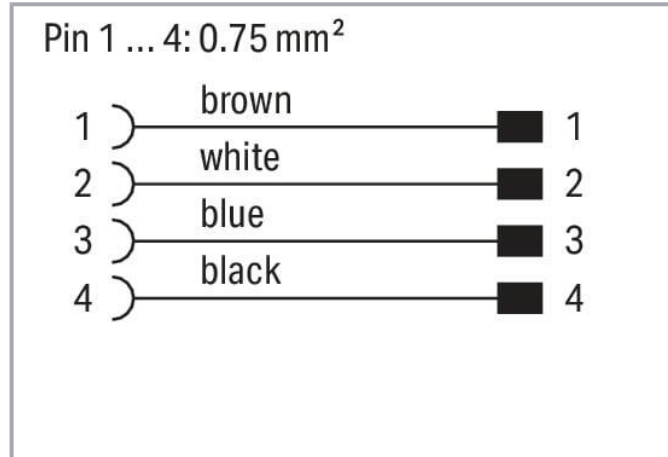


Data sheet | Item number: 756-3105/040-005

Power cable; M12A socket; straight; M12A plug; straight; 4-pole; Length: 0.5 m

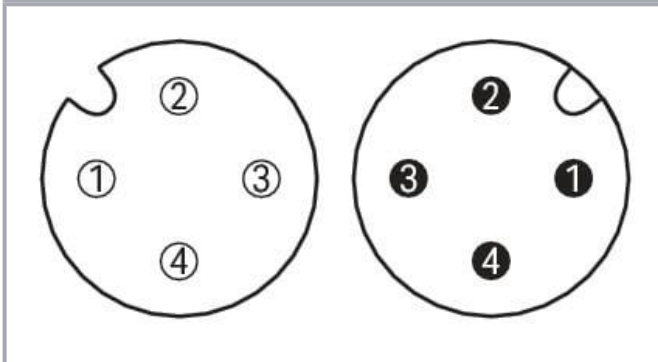

www.wago.com/756-3105/040-005

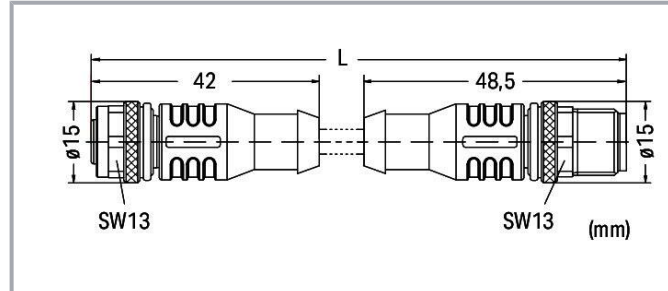

Item description

Short description:

- PUR, halogen-free
- UL / CSA
- Suitable for drag chains
- Silicon- and CFC-free
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Data

Technical data

Connection type	M12 socket - M12 plug
Pole number	4
Cable connection direction to mating direction	0°
Cable connection direction to mating direction (2)	0°
Connector interface coding (cable/adaptor) 1 1	A-coded
Connector interface coding (cable/adaptor) 2 1	A-coded
Cable length	0.5 m
PLC manufacturer	WAGO
Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Insulation resistance	1000 MΩ
Conductor resistance	≤ 26 Ω/km

Mechanical Data

Bending radius	10 x cable diameter (min.) for flexible application
Bending cycles	4 Mio.
Drag chain capability	yes
Sheathed cable diameter	6 ... 6.4 mm
Type code	Lif9YH-11YH 4x0.75 mm ²
Conductor configuration	Bare copper wire (40 x 0.15 mm)
Conductor insulation	PP9Y (halogen-free)
Housing material	TPU/TPU, black (~ RAL 9005)
Tightening torque	1 Nm
Weight	51 g

Environmental requirements

Ambient (operating) temperature (dynamic)	-30 ... +80 °C
Ambient (operating) temperature (static)	-30 ... +80 °C
Protection type	IP67
Pollution degree	3/2 per IEC 60664-1

Subject to changes. Please also observe the further product documentation!

**Commercial data**

eCl@ss 10.0	27-06-18-01
eCl@ss 9.0	27-06-18-01
ETIM 8.0	EC001855
ETIM 7.0	EC003249
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4045454126964
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	89ffbd2d-0955-4997-89a4-164e22f9a1ad
SCIP notification number (Belgium)	21576389-59b9-492e-928c-ceede97e4811
SCIP notification number (Bulgaria)	dfc604f8-b002-4dd7-8697-3205456af447
SCIP notification number (Czech Republic)	2a954bf7-ab57-4f60-a1d9-1f1a4172bc95
SCIP notification number (Denmark)	3f62ee0d-699d-4e8e-a3b4-97d30ddde340
SCIP notification number (Finland)	98d9a578-474d-4d32-ae01-9d1dc31f3dc3
SCIP notification number (France)	2052e441-1085-4b9a-8309-8fed7b09e4d0
SCIP notification number (Germany)	79ae68e8-a764-498e-ba38-dc05b239e7a9
SCIP notification number (Hungary)	95509148-50e0-4d36-a9bc-a1f7b228badf
SCIP notification number (Italy)	21fd6b9a-9a12-4631-95a3-b4b2b60df2e0
SCIP notification number (Netherlands)	717ff4cd-160e-4f6b-8e6a-92f148545ab3
SCIP notification number (Poland)	d7001600-edfe-43fe-bf01-a7badf2608
SCIP notification number (Romania)	f6a39db2-a7f3-4124-8219-bddbef0553cf
SCIP notification number (Sweden)	98e045ee-c098-45b8-9514-6eaff5b3aa23

Approvals / Certificates**General approvals**

Logo	Approval	Additional Approval Text	Certificate name
	UL	UL 2238	E519602

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Underwriters Laboratories Inc.

Downloads

Documentation

System Description

I/O-SYSTEM – SPEEDWAY, General Product Information	pdf 1.1 MB	Download
--	---------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-3105/040-005	URL	Download
WSCAD Universe 756-3105/040-005	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-3105/040-005 Power cable; M12A socket; straight; M12A plug; straight; 4-pole; Length: 0.5 m	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.