Z
V
W
VV Thread

S
R1
R2
P
PP

Keying Shown as example

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material   : Composite

-Shell Plating   : Without Plating

-Insulator   : Thermoplastic

-Contacts   : Copper Alloy

-Seals & Grommet   : Silicon Elastomer

-Contact Plating   : Gold over copper Alloy 0.8µm minimum

-Durability   : 500 Mating cycles

-Delivered with Souriau contacts and Accessories

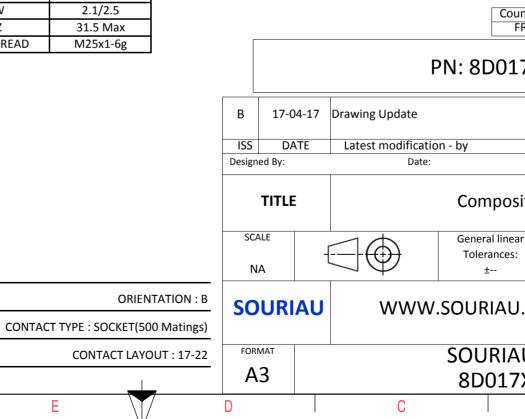-Temperature Range   : -65°C to +175°C

-Salt Spray   : 2000 hours

Connector dimension	
Dim	**Nominal**
P	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D017X22SB

ISS	DATE	Latest modification - by	MOD N°
B	17-04-17	Drawing Update	

Designed By: Date: **CUSTOMER DRAWING**

TITLE   Composite Receptacle 8D series

SCALE	General linear Tolerances:	NPRDS / PROJECT
NA	±--	**859**

SOURIAU   WWW.SOURIAU.COM

FORMAT	SOURIAU DRG N°	SHEET
A3	8D017X22SB-C	1/2

BASIC SERIES: 8D   0   -   17   X   22   S   B

SHELL TYPE   : Square Flange Receptacle

CONTACT TYPE   : Standard Crimp Contact

SHELL SIZE : 17

PLATING   : X =   Without Plating

ORIENTATION : B

CONTACT TYPE : SOCKET(500 Matings)

CONTACT LAYOUT : 17-22

Contact Layout

22

2#12
2#8 Triax

17-22		
Ctc	X	Y
A	0	4.57
B	6.32	0
C	0	-4.57
D	-6.32	0

Panel Cutout

SQUARE FLANGE RECEPTACLE (TYPE 0)
REAR MOUNTING

SQUARE FLANGE RECEPTACLE (TYPE 0)
FRONT MOUNTING

R1

R1

ØT

ØA

ØT

ØAA

Max. thickness panel for receptacle: Type 0: front mounting = 3.2 mm, rear mounting = 2.5 mm

Dim	Nominal
ØA	30.96 min
ØAA	25.81 min
R1	26.97
ØT	3.25 ±0.13

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D017X22SB

B	17-04-17	Drawing Update	
ISS	DATE	Latest modification - by	MOD N°

TITLE	Composite Receptacle 8D series

SCALE		General linear Tolerances: ±--	NPRDS / PROJECT **859**
NA			

SOURIAU   WWW.SOURIAU.COM

FORMAT	SOURIAU DRG N°	SHEET
A3	8D017X22SB-C	2/2