
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00025	Connector, dc jack, 5.5x2.1xL17.4 mm, molding style	2	
2	30-00395	Wire, 2C TS, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00004	Overmold, PVC	2	

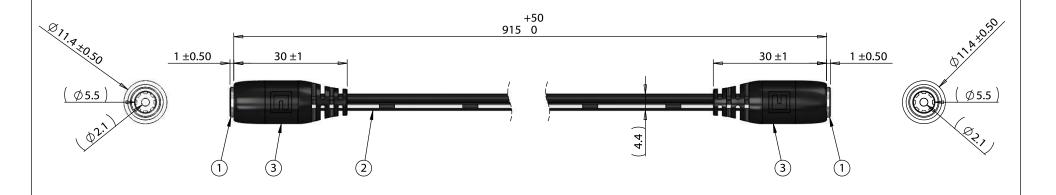

Notes: Functionally equivalent components may be substituted

Wiring Diagram							
50-00025	wire color	50-00025					
center	black with stripe	center					
sleeve	black	sleeve					

Revision:	Date:	Description:	Prepared:	Notes:		
Α	7/28/2017	Initial release	PS Date: 2017.07.28 15:46:03 -07'00'	RoHS compliant	TFNSII ITY	
			Verified: LA Digitally signed by LA Date: 2017.07.28 16:14:54-07'00'	Function test: no open, no short circuit, no intermittent	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
			Dimensions are in		Tax 1.541.525.4202 web terisinty.com	
			millimeters. Tolerances:	Description:	Size: Part number:	
			χ: + 0.5 mm Cable, 915 mm, 5.5x2.1 mm 50-00025 dc jack to	А 10-02565		
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	same, 18 AWG, UL2468, 30-00395 wire	Scale: 1:1 Sheet 1 of 1	

3 2