



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
ORIGINAL	(1)

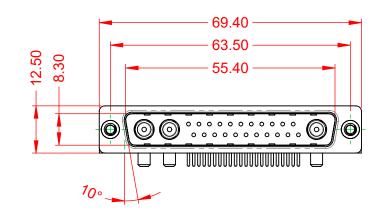




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


DIELECTRIC

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	30A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.



					SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBI	COMBINATION D-SUB		DRAWN: C.B		DATE: JAN. 01/2019			
			CHECKED:		DATE:			
EDAC	C INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:1)	SHEET 1 O	= 2		
	CANADA OR USE	OR USED AS THE BASIS FOR THE	DRAWING	NUMBER: 629-25W	3640-3TC	ISSUE		
YOUR CONNECTION TO QUALITY &	QUALITY & SERVICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		PART NUN	MBER: 629-25W	3640-3TC	1		

1000V AC rms



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

