
Ξ	G	П	m	O





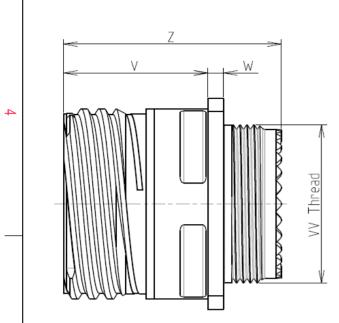

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 09

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel		
	-Shell Plating	: Passivated		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered without Souriau contacts			
	-Temperature Range	 -65°C to +200°C 		
	-Salt Spray	: 500 hours		
	-Mass	: 24.03 g ± 10%		

8D 0

G

09

Κ

98

S

F

Ν

L

Dim Nom P 3.25: PP 5.49: R1 18. R2 15.	±0.2 ±0.2
R1 18.	-
_	26
R2 15.	20
	09
S 23.8:	±0.3
V 20.83+0)/-1.25
W 2.1/	2.5
Z 31.5	Max
VV THREAD M12x	1-6g

Delivered W/O Contacts


CONTACT LAYOUT : 09-98

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : N

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

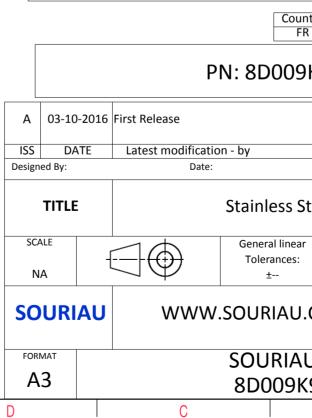

σ		A		_	
				4	
AS EXAMPLE				3	
any non-conformination which does not co er of the Parties or I adation, technical n untry Jurisco R OK98SNL	mply with by a third party			2	
			MOD N°	-	
	CUSTOMER	DRAWING		-	
Steel Receptacle 8D series					
ar :	NPRDS / 1 85			1	
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°	1		SHEET		
K98SNL-C		A	1/2	J	
U	I	ň			

		G	г	m	D	0
		Contact Layout				Panel Cuto
4	-×				Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positio ID A B C C Shell Arrangement Numb size no. conta 9 -98 3	n <u>X-axis Y-axis</u> (mm) (mm) +.065 (1.65) +.038 (0.97) +.000 (0.00)075 (1.91) 065 (1.65) +.038 (0.97) er of <u>Size</u> <u>Service</u> <u>Contact</u> Supersede location				ØT
ω						Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
0						PN: 8D009k
					ISS DATE Designed By:	L6 First Release Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT	
					A3	SOURIAU 8D009K9
	Н	G	F	E	D	C

