


# SMTJ

## 3500 A Transient voltage suppressor



### Product features

- Low slope resistance
- Very low clamping voltage
- Excellent clamping capability
- Sharp breakdown voltage
- Glass passivated junction
- Snapback technology for superior clamping factor
- High temperature reflow soldering: +260 °C /40 s at terminal
- Plastic package meets UL 94 V-0 flammability rating
- UL 1449 recognized.  
File No. : E340782 Guide VZCA2


### Applications

- Consumer electronics
- Telecommunications
- Computing and servers
- Ethernet protection
- Industrial automation
- Networking Equipment


### Environmental compliance and general specifications



### Ordering part number

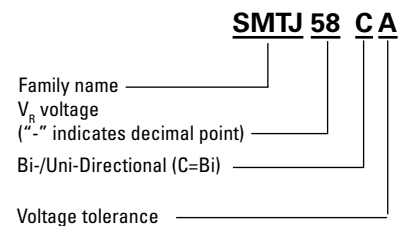

### PIN configuration



SMT-4




### Absolute maximum ratings

(+25 °C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Operating junction temperature range	$T_J$	-55 to +150	°C
Peak pulse current @ 8/20 $\mu$ s	$I_{PP}$	3500	A
Storage temperature range	$T_{STG}$	-55 to +150	°C
Typical thermal resistance junction to lead	$R_{\theta JL}$	15	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	65	°C/W

### Mechanical parameters, pad layout- mm

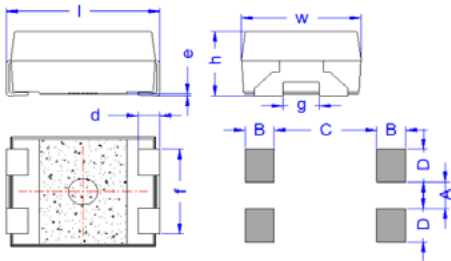

Dimension	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
l	10.10	10.70	0.398	0.421
w	7.70	8.30	0.303	0.327
h	4.20	5.00	0.165	0.197
d	1.20	1.80	0.047	0.071
e	0	0.30	0	0.012
f	6.20	6.60	0.244	0.260
g	2.40	2.60	0.094	0.102
A		2.00		0.079
B	2.00		0.079	
C		7.00		0.276
D	2.50		0.098	

### Part marking




Part marking: xxxx = Date code  
yyyyyy- Refer to marking designer listed in Electrical Characteristics table

### Packaging information (mm)

Drawing not to scale.

Supplied in tape and reel packaging, 1,000 parts per 13" diameter reel (EIA-481 compliant)

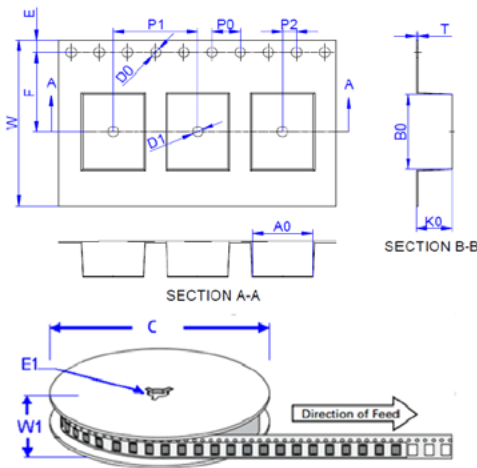


Dimensions	Millimeters	Inches
A0	8.50 ± 0.3	0.335 ± 0.012
B0	10.80 ± 0.3	0.425 ± 0.012
C	330.0	13.0
D0	1.50 ± 0.1	0.059 ± 0.004
D1	1.50 ± 0.1	0.059 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	11.50 ± 0.2	0.453 ± 0.008
K0	5.10 ± 0.1	0.201 ± 0.004
P0	4.00 ± 0.2	0.157 ± 0.008
P1	12.00 ± 0.2	0.472 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
T	0.30 ± 0.05	0.012 ± 0.002
W	24.0 ± 0.3	0.945 ± 0.012
W1	28.5 ± 2.0	1.122 ± 0.079

### Electrical characteristics (+25 °C)


Part number Bi-polar	Marking Bi	$V_R$ (V)	$V_{BR} @ I_T$		$I_T$ (mA)	$I_R @ V_R$ ( $\mu$ A)	$V_C @ 8/20\mu s$	$V_C @ 8/20\mu s$	$C_o$ typ (pf)
			min(V)	max(V)			3000 A (V)	3500 A (V)	
SMTJ58CAT	TJ58CA	58	64	70	10	5	110	120	3000
SMTJ66CAT	TJ66CA	66	72	80	10	5	120	130	2500
SMTJ76CAT	TJ76CA	76	85	95	10	5	140	150	2200
SMTJ86CAT	TJ86CA	86	95	105	10	5	157	170	1900

**Ratings and V-I characteristic curves** (+25 °C unless otherwise noted)

**V-I curve characteristics  
(Bi-directional with negative resistance)**

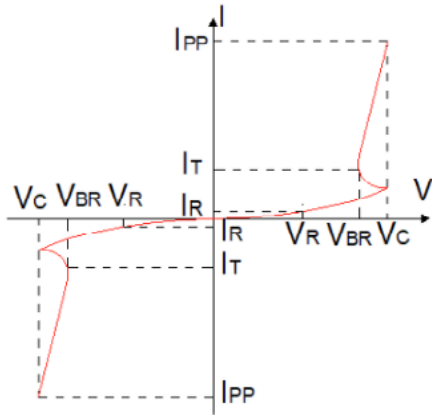

**Typical V<sub>BR</sub> vs. junction temperature**

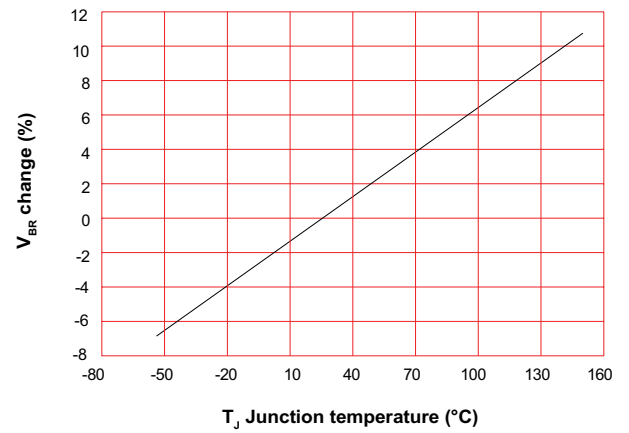

Surge waveform: 8/20 μs

V<sub>R</sub>: Stand-off voltage – Maximum voltage that can be applied

V<sub>BR</sub>: Breakdown voltage


V<sub>C</sub>: Clamping voltage – Peak voltage measured across the suppressor at a specified I<sub>PP</sub>

I<sub>R</sub>: Reverse leakage current


I<sub>T</sub>: Test current

V<sub>F</sub>: Forward voltage drop for Uni-directional TVS diode


**Pulse waveform**

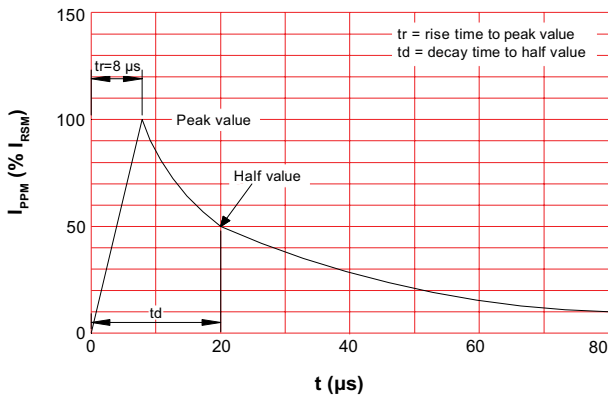


**Pulse derating curve**

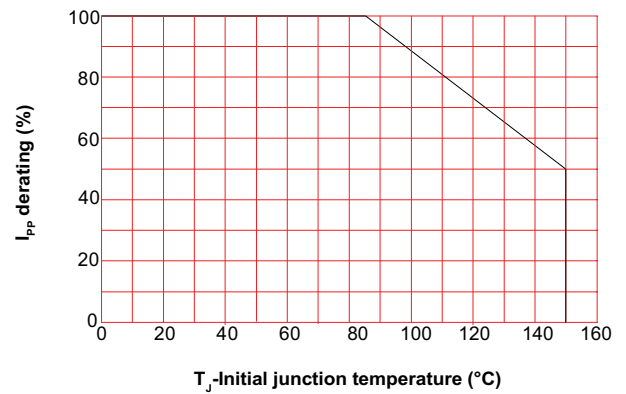

**Peak pulse power rating curve**

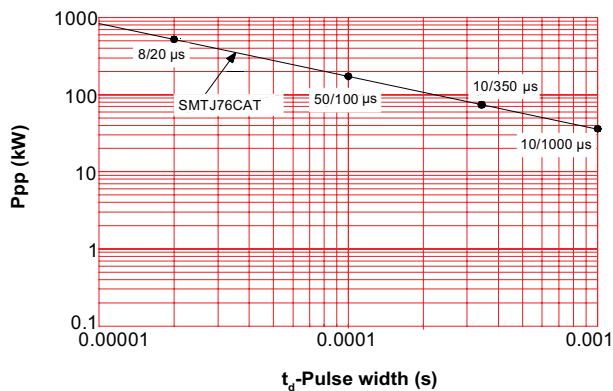

**Solder reflow profile**

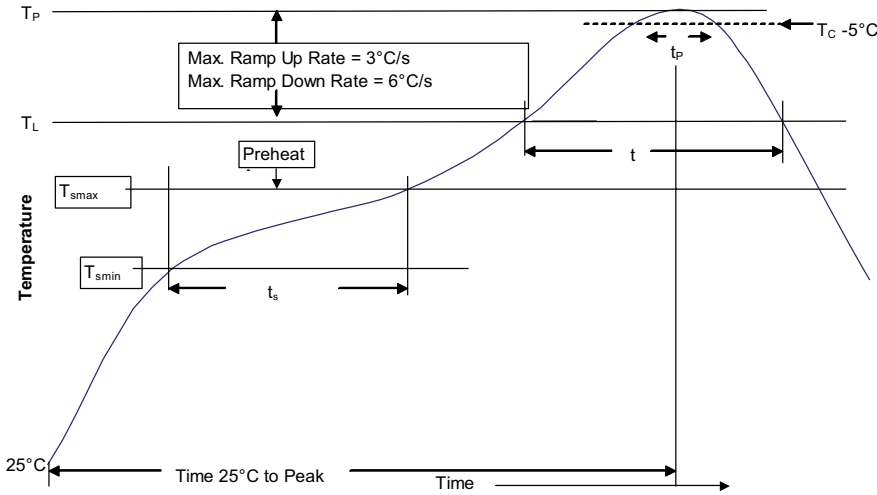

**Table 1 - Standard SnPb solder ( $T_C$ )**

Package thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

**Table 2 - Lead (Pb) free solder ( $T_C$ )**

Package thickness	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350 - 2000	Volume mm <sup>3</sup> >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

**Reference J-STD-020**

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak	<ul style="list-style-type: none"> <li>Temperature min. (<math>T_{smin}</math>)</li> <li>Temperature max. (<math>T_{smax}</math>)</li> <li>Time (<math>T_{smin}</math> to <math>T_{smax}</math>) (<math>t_s</math>)</li> </ul>	<ul style="list-style-type: none"> <li>100 °C</li> <li>150 °C</li> <li>60-120 seconds</li> </ul>
Ramp up rate $T_L$ to $T_p$	3 °C/ second max.	3 °C/ second max.
Liquidous temperature ( $T_L$ ) Time ( $t_L$ ) maintained above $T_L$	<ul style="list-style-type: none"> <li>183 °C</li> <li>60-150 seconds</li> </ul>	<ul style="list-style-type: none"> <li>217 °C</li> <li>60-150 seconds</li> </ul>
Peak package body temperature ( $T_p$ )*	Table 1	Table 2
Time ( $t_p$ )* within 5 °C of the specified classification temperature ( $T_C$ )	20 seconds*	40 seconds*
Ramp-down rate ( $T_p$ to $T_L$ )	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

\* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
Electronics Division  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2020 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 11219 BU-MC20197  
November 2020

Eaton is a registered trademark.  
All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

