0	· •				4	<u>^</u>
ŭ			h	5		
3		1 1			4	

TABLE 1

E

D

C

В

A


9

8

MOLEX PN	ENG. NO.	LED
1202470063	BNB801P-FBC	YES

TABLE 2 BILL OF MATERIAL


	-			
ITEM	DESCRIPTION	MATERIAL	FINISH	
1	INSERT	TPU	BLACK	
2	CONTACT	COPPER ALLOY	GOLD OVER NICKEL	
3	O-RING	VITON	RED	
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED	
5	HOUSING	PBT	BLACK	
6	SHELL	BRASS	NICKEL PLATED	
7	CONTACT	COPPER ALLOY	GOLD OVER NICKEL	
8	LED	NO LED = PA	BLACK	
0	LED	WITH LED = PA	TRANSPARENT	
9	RESIN	EPOXY	TRANSPARENT	
10	LABEL	ABS	WHITE	
11	LABEL ADHESIVE	PE	WHITE	

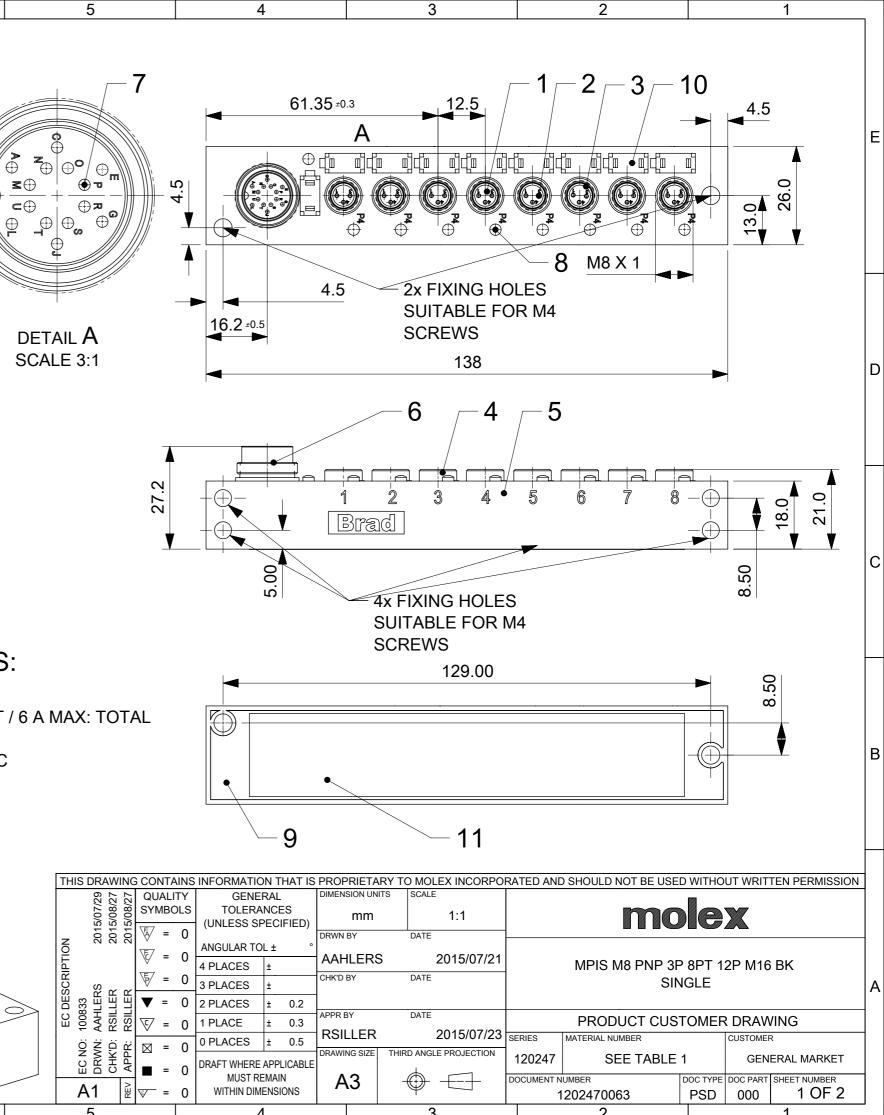



SCALE 2:1 10 LABEL 9x packed in a bag.

GENERAL CHARACTERISTICS:

	NOMINAL VOLTAGE:	24 V DC
•	RATED CURRENT:	2 A PER PORT / 6 A MAX: TOTAL
	IP DEGREE OF PROTECTION:	IP 67
	TEMPERATURE RANGE:	-25°C to + 85°C

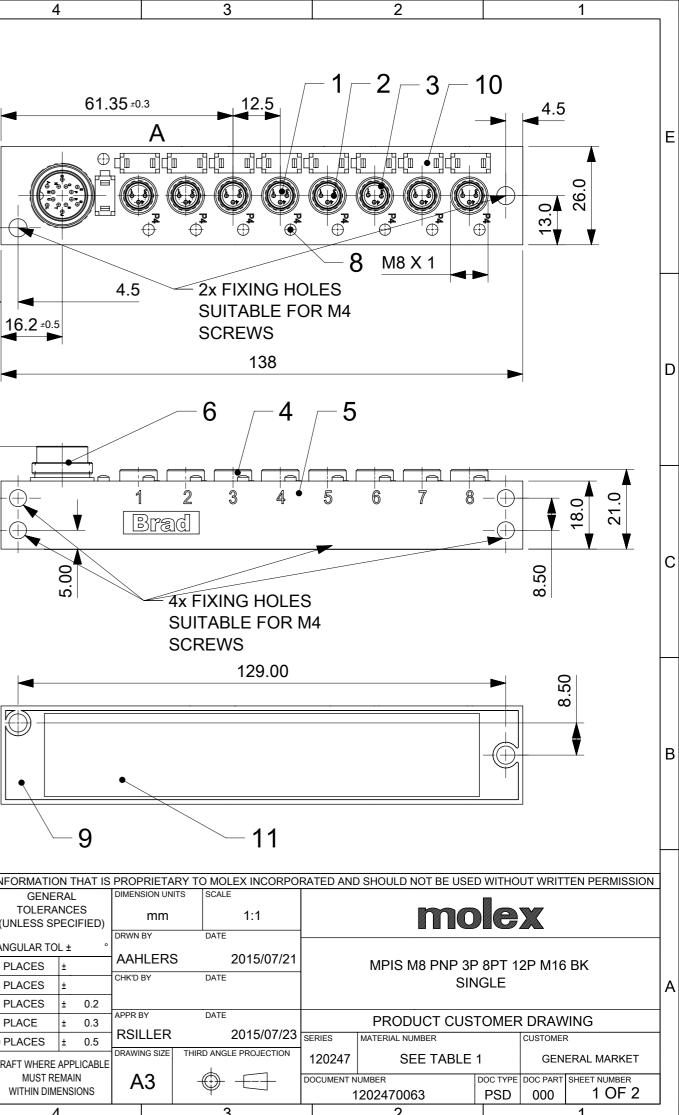

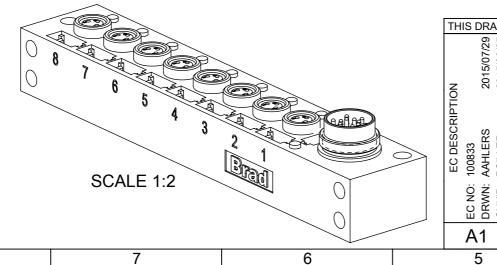

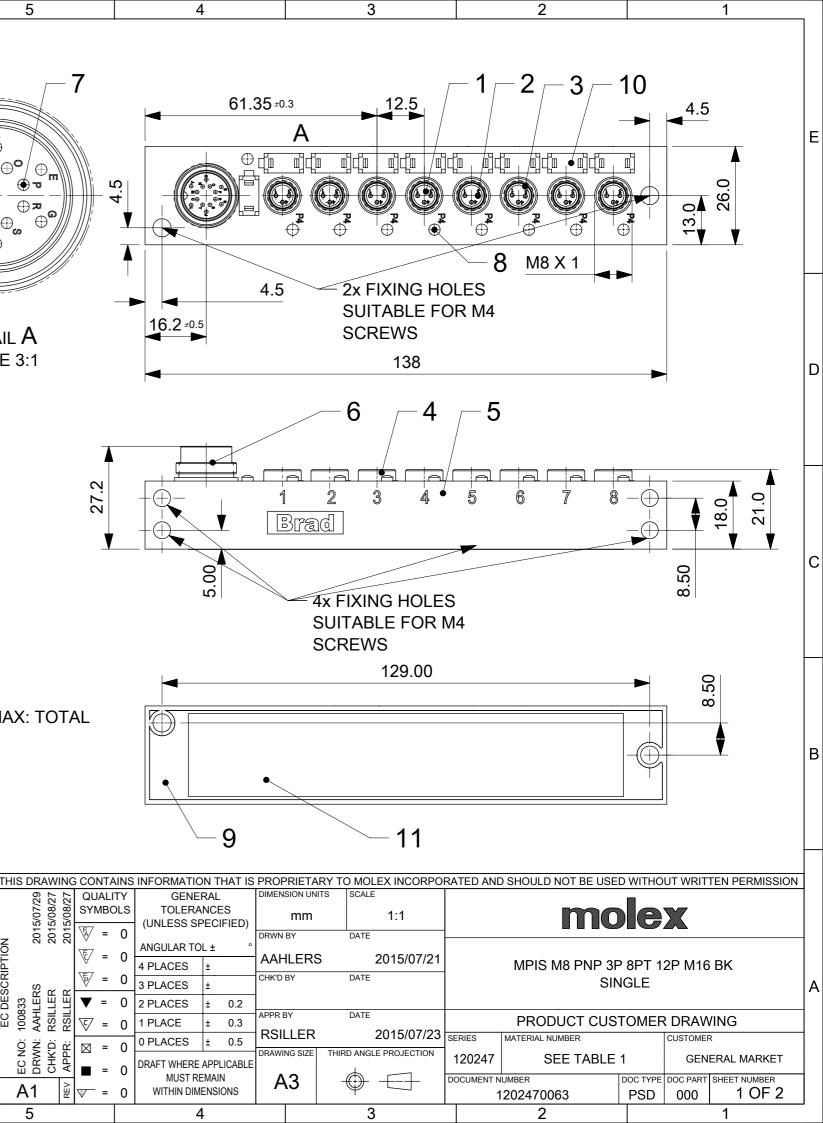


\circ	0		_	7			/	-	1	 2
9		I			1 r)		7	 +	<u>.</u>


Wiring Diagram Single PNP

C

B

A

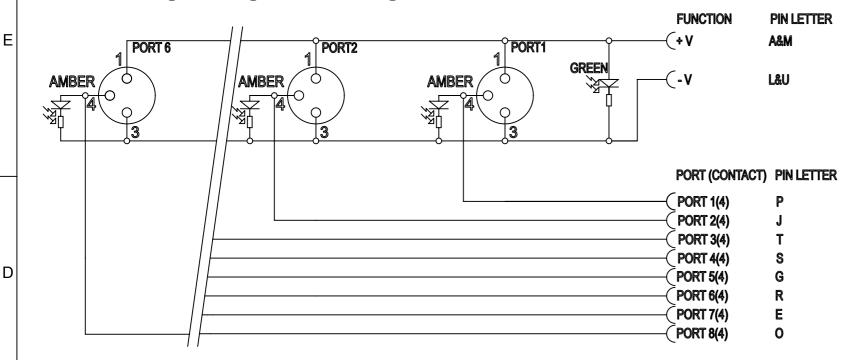

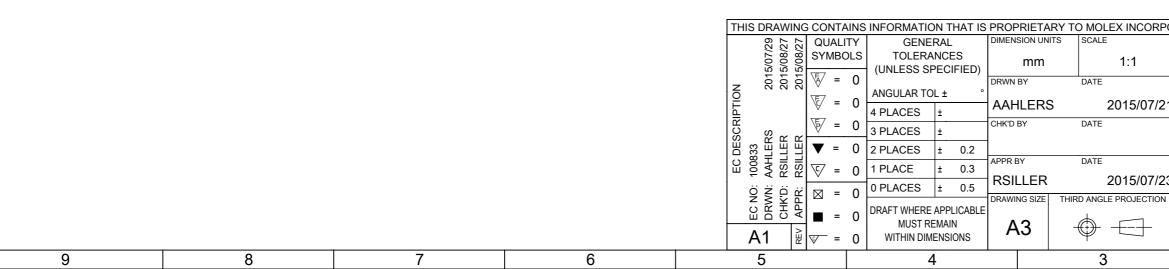

201	DRATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
	molex								
21	MPIS M8 PNP 3P 8PT 12P M16 BK								
	SINGLE								
			PRODUCT CUS	TOMEF	R DRAW	/ING			
23	SE	RIES	MATERIAL NUMBER		CUSTOMER	२			
N	1	20247	SEE TABLE	1	GEN	ERAL MARKET			
	DC	CUMENT N	UMBER	DOC TYPE	DOC PART	SHEET NUMBER			
		1	202470063	PSD	000	2 OF 2			
	2					1	•		

2

1

E

D

С

В