

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

旧用



ISSUE NUMBER

ORIGINAL

(1)

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C POWER/CO-AX CONTACT RATING: 30A (CURRENT)

.X ±0.25 .XX ±0.13

.XXX ±0.05

10.70


5.80

11.94


2.54

(IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min. 1000V AC rms



			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
	COMBINATION D-SUB			DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-36W4250-3T5		ISSUE
YOUR CONNECTION	O QUALITY & SERVICE		PART NUMBER: 630-36W	4250-3T5	1

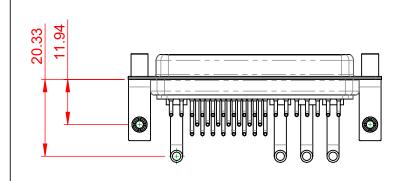

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

