
**Mounting Option** 


03-.116 (2.95) I.D. Floating Eyelets

## **Contact Detail**


524-P.C. Tail .018 Sq.(0.46 Sq.) - Tail LG=.175(4.45)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

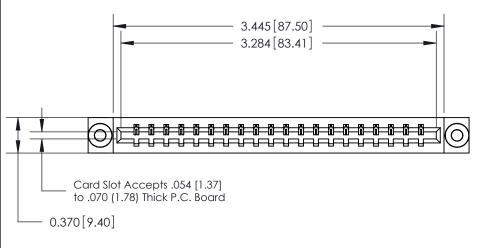

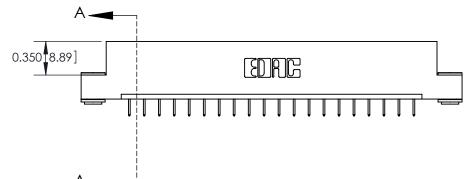





## **See Accompanying Page for:**

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

333 Series Card Edge Connector Part Number: 333-020-524-103



YOUR CONNECTION TO QUALITY & SERVICE

|   | C  |
|---|----|
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND |    |
| SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE    | DF |
| MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.      |    |

| $\overline{}$ |                   |                  |
|---------------|-------------------|------------------|
|               | ACAD REFERENCE NO | . 333 ENG MASTER |
|               | DRAWN: J.LEE      | DATE: OCT. 14/09 |
|               | CHECKED:          | DATE:            |
|               | SCALE: NTS        | SHEET 1 OF 4     |
| 0             | DRAWING NUMBER    | ISSUE            |

333 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



| 333 Series Cara Eage Connector       |   | ACAD REFERENCE NO. 333 ENG MASTER |                  |        |  |
|--------------------------------------|---|-----------------------------------|------------------|--------|--|
|                                      |   | DRAWN: J.LEE                      | DATE: OCT. 14/09 |        |  |
|                                      |   | CHECKED:                          | DATE:            |        |  |
| EDAC INC                             | THESE DRAWINGS AND SPECIFICATIONS                               | SCALE: NTS                        | SHEET :          | 2 OF 4 |  |
|                                      | SHALL NOT BE REPRODUCED,OR COPIED  OR USED AS THE BASIS FOR THE | DRAWING NUMBER                    |                  | ISSUE  |  |
| YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS                                | 333 Assembly                      |                  | 1      |  |

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



1220F NOWRE

DRIGINAL

1



|  | Mounting Options                          |  | ACAD REFERENCE NO. 333 ENG MASTER |             |         |           |
|--|---|--|-----------------------------------|-------------|---------|-----------|
|  |   |  | DRAWN:                            | J.LEE       | DATE: O | CT. 14/09 |
|  |   |  | CHECKED                           | ):          | DATE:   |           |
|  | EDAC INC THESE DRAWINGS AND SPECIFICATION |  | SCALE:                            | NTS         | SHEET ; | 3 OF 4    |
|  | TORONTO, ONTARIO                          | ARE THE PROPERTY OF EDAC INC.,AND<br>SHALL NOT BE REPRODUCED,OR COPIED<br>OR USED AS THE BASIS FOR THE | DRAWING                           | NUMBER      |         | ISSUE     |
|  | YOUR CONNECTION TO QUALITY & SERVICE      | MANUFACTURE OR SALE OF APPARATUS   | 3                                 | 33 Assembly |         | 1         |

ISSUE NUMBER

ORIGINAL



## **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 333 Series Card Edge Connector                           | ACAD REFERENCE NO. 333 ENG MASTER      |
|--|--|
| Features and Specifications                              | DRAWN: J.LEE DATE: OCT. 14/09          |
| redictes and specifications                              | CHECKED: DATE:                         |
| EDAC INC THESE DRAWINGS AND ARE THE PROPERTY OF          |  |
| IORONIO, ONIARIO SHALL NOT BE REPRO                      | DDUCED, OR COPIED DRAWING NUMBER ISSUE |
| YOUR CONNECTION TO QUALITY & SERVICE WITHOUT WRITTEN PER | LE OF APPARATUS 333 Accombly 1         |